

/ Revised record

A	2019/10/18	ALL	DFN2×2-6L		
B	2020/7/13	11			
C	2020/11/4	1 2			

BRCL3230ZF / BRCL3230ZF
MOSFET
BRCL3230ZF DFN2×2-6L
BRCL3230ZF

The BRCL3230ZF series product is a high integration solution for lithium-ion/polymer battery protection. BRCL3230ZF contains advanced power MOSFET, high-accuracy voltage detection circuits and delay circuits.


BRCL3230ZF is put into an ultra-small DFN2×2-6L package makes it an ideal solution in limited space of battery pack. BRCL3230ZF has all the protection functions required in the battery application including overcharging, overdischarging, overcurrent and load short circuiting protection etc. The low standby current drains little current from the cell while in storage. The device is not only targeted for digital cellular phones, but also for any other Li-Ion and Li-Poly battery-powered information appliances requiring long-term battery life.

◆ 45mΩ MOSFET
◆ DFN2×2-6L
◆ RC

◆ 2 1 2
◆ 0V
◆ 2.8uA, 1.6uA;

- ◆ Integrate advanced power MOSFET with Equivalent of 45mΩ $R_{DS(ON)}$;
- ◆ Ultra-small DFN2×2-6L package;
- ◆ Internal integration RC without any peripheral devices;
- ◆ Over-temperature Protection;
- ◆ Overcharge Current Protection;
- ◆ Three-step Overcurrent Detection: Overdischarge Current1, Overdischarge Current2, Load Short Circuiting;
- ◆ Charger detection function;
- ◆ 0V battery charging function, delay times are generated inside, High-accuracy voltage detection.
- ◆ Low Current Consumption, Operation Mode: 2.8μA typ, Power-down Mode: 1.6μA typ ;
- ◆ HF Product;

/ Typical Application

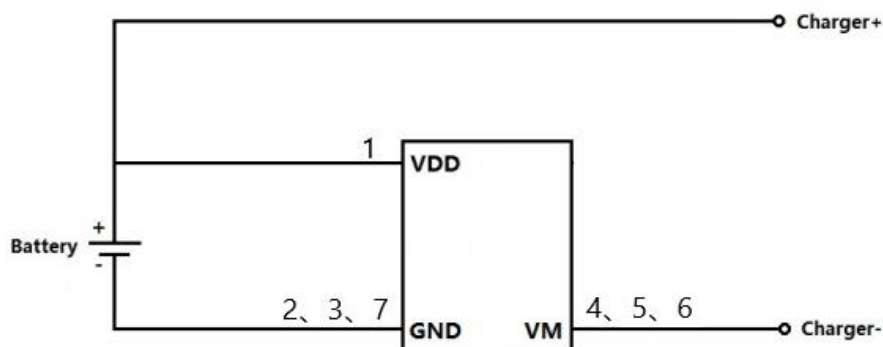

(1)


(2)

Notes:

(1) The chip power consumption shall not exceed the maximum power consumed by the package.

(2) This product has anti-static protection function, but do not exceed the maximum capacity of the product to withstand static electricity.

/ Pinning



Pin Number	Pin Name	Pin Description
1	VDD	Power Supply
2 3 7	GND	Ground, connect the negative terminal of the battery to this pin.
4 5 6	VM	The negative terminal of the charger. The internal FET switch connects this terminal to GND.

/ Marking

See Marking Instructions.

/Parameter	/Symbol	/Value	/Unit
V_{DD} input pin voltage	V_{IN}	-0.3 to +6	V
V_M input pin voltage	V_{VM}	-6 to +10	V
Power Dissipation	P_D	400	mW
Maximum Junction Temperature	T_J	125	°C
Lead Temperature	T_L	300	°C
Operating Junction Temperature	T_{opr}	-40 to +85	°C
Storage Temperature	T_{stg}	-55 to +150)	°C

Equivalent FET on Resistance						
Equivalent FET on Resistance	R_{DS}	$V_{dd}=3.6V, I_{VM}=1A$		45		mΩ
Over temperature protection						
Over Temperature Protection	OTP		125	140	155	°C
Over Temperature Recovery Degree	OTPR		100	115	130	°C
Delay time						
Overcharge Current Detection Delay Time	T_{OCC}	$V_{dd}=3.6V$	6.4	8	9.6	ms
Overcharge Voltage Detection Delay Time	T_{CU}	$V_{DD}=3.6V\sim 4.4V$	105	135	165	ms
Overdischarge Voltage Detection Delay Time	T_{DL}	$V_{DD}=3.6V\sim 2.0V$	28	35	45	ms
Overdischarge Current1 Detection Delay Time	T_{IOV1}	$V_{DD}=3.6V$	6.4	8	9.6	

/ Functional Description

BRCL3230ZF

MOSFET

45mΩ

The BRCL3230ZF monitors the voltage and current of a battery and protects it from being damaged due to overcharge voltage, overdischarge voltage, overdischarge current, and short circuit conditions by disconnecting the battery from the load or charger. The peripheral circuit is very simple. The MOSFET is integrated and its $R_{DS(ON)}$ is as low as 45mΩ typical.

/ Normal Operating mode

If no exception condition is detected, charging and discharging can be carried out freely. This condition is called the normal operating mode.

/ Overcharge Condition

VCU ,


TCU\000

/ Overcharge Condition

The BRCL3230ZF detects this voltage and releases the overcharge condition. Consequently, in the case that the battery voltage is equal to or lower than the overcharge detection voltage (VCU), the BRCL3230ZF returns to the normal condition immediately, but in the case the battery voltage is higher than the overcharge detection voltage (VCU), the chip does not return to the normal condition until the battery voltage drops below the overcharge detection voltage (VCU) even if the load is connected. In addition, if the VM pin voltage is equal to or lower than the overcurrent 1 detection voltage when a load is connected and discharging starts, the chip does not return to the normal condition.

Note: If the battery is charged to a voltage higher than the overcharge detection voltage (VCU) and the battery voltage does not drop below the overcharge detection voltage (VCU) even when a heavy load, which causes an overcurrent, is connected, the overcurrent 1 and overcurrent 2 do not work until the battery voltage drops below the overcharge detection voltage (VCU). Since an actual battery has, however, an internal impedance of several dozens of mΩ, and the battery voltage drops immediately after a heavy load which causes an overcurrent is connected, the overcurrent 1 and overcurrent 2 work. Detection of load shortcircuiting works regardless of the battery voltage.


/ Overdischarge Condition

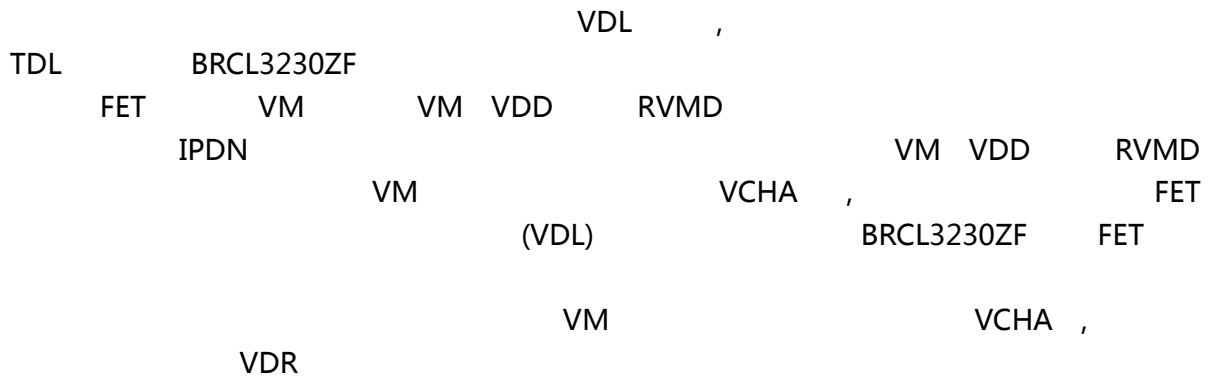

When the battery voltage drops below the overdischarge detection voltage (VDL) during discharging under normal condition and it continues for the overdischarge detection delay time (tDL) or longer, the BRCL3230ZF turns the discharging control FET off and stops discharging. This condition is called overdischarge condition. After the discharging control FET is turned off, the VM pin is pulled up by the RVMD resistor between VM and VDD in BRCL3230ZF the current of the chip is reduced to the power-down current (IPDN). This condition is called power-down condition. The VM and VDD pins are shorted by the RVMD resistor. The power-down condition is released when a charger is connected and the potential difference between VM and VDD becomes typical or higher, at this time, the FET is still off. When the battery voltage becomes the overdischarge detection voltage (VDL) or higher (see note), the BRCL3230ZF turns the FET on and changes to the normal condition from the overdischarge condition.

Note: If the VM pin voltage is no less than the charger detection voltage (VCHA), when the battery under overdischarge condition is connected to a charger, the overdischarge condition is released (the discharging control FET is turned on) as usual, provided that the battery voltage reaches the overdischarge release voltage (VDR) or higher.

/ Overcurrent Condition

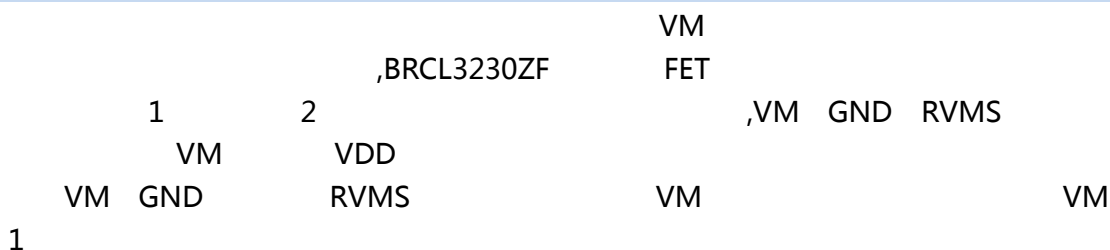


1

When the discharging current becomes equal to or higher than a specified value (the VM pin voltage is equal to or higher than the overcurrent detection voltage) during discharging under normal condition and the state continues for the overcurrent detection delay time or longer, the BRCL3230ZF turns off the discharging control FET to stop discharging. This condition is called overcurrent condition. (The overcurrent includes overcurrent, or load shortcircuiting.) The VM and GND pins are shorted internally by the RVMS resistor under the overcurrent condition. When a load is connected, the VM pin voltage equals the VDD voltage due to the load.


Because of the connection between the VM and the GND by the RVMS resistor when the load is removed, the VM pin goes back to the GND potential since the VM pin is shorted the GND pin with the RVMS resistor. Detecting that the VM pin potential is lower than the overcurrent detection voltage



/Overcharge And Overdischarge Detection

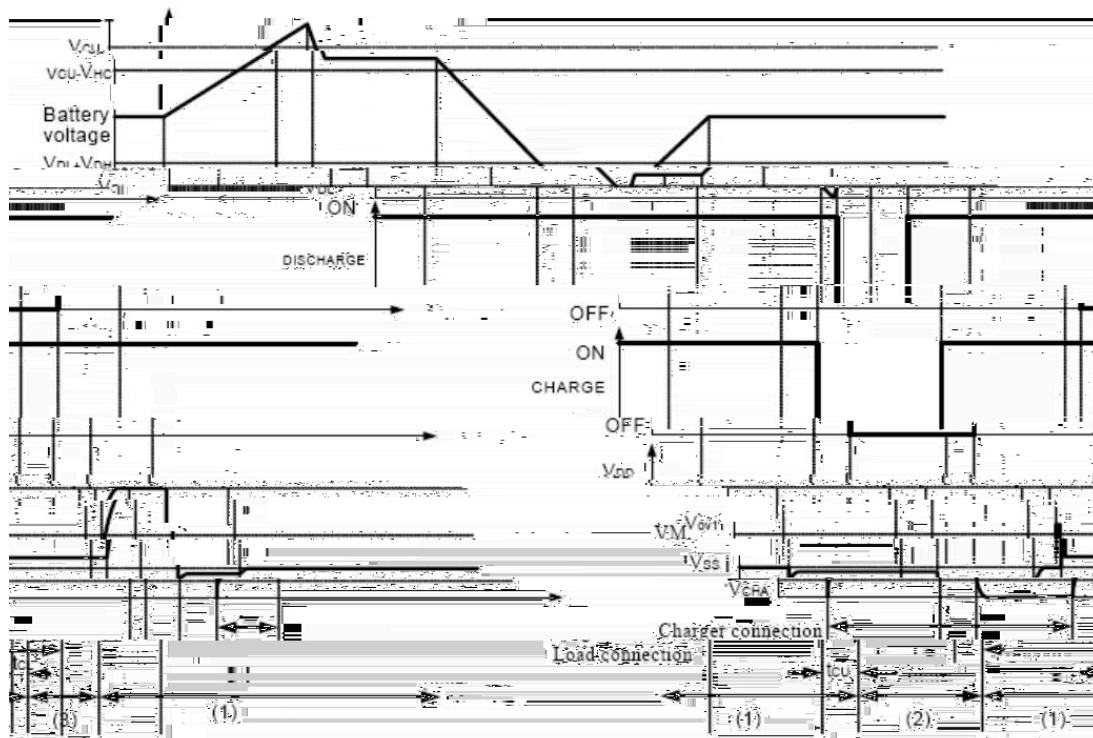


/Overdischarge Current Detection

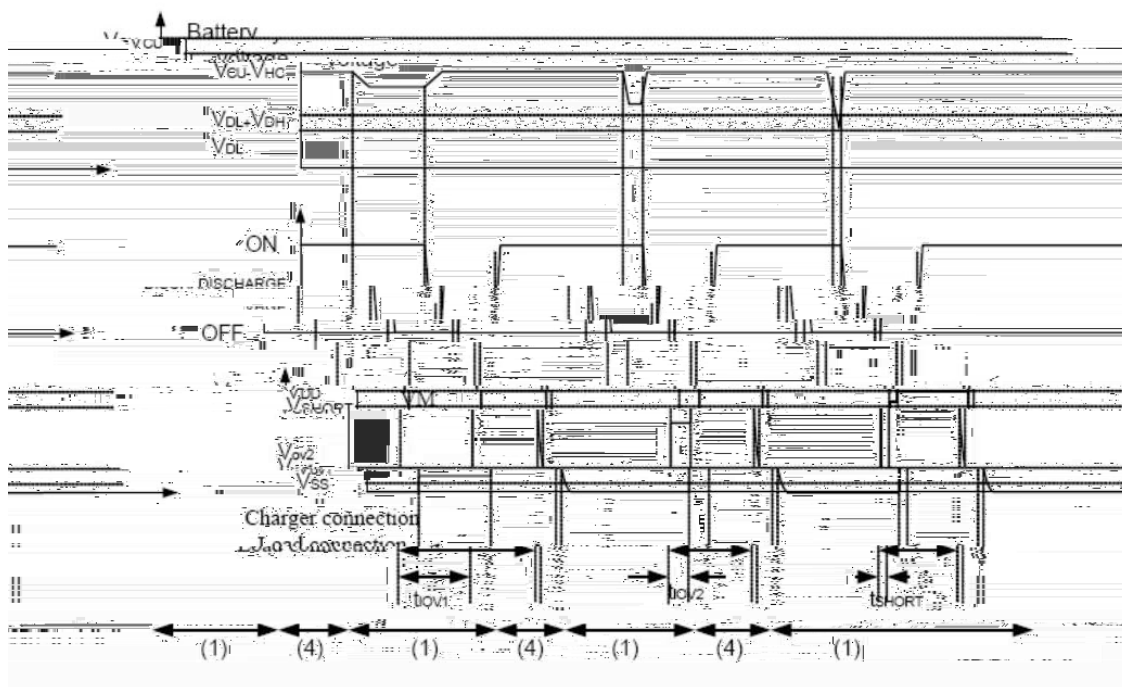


/ Timing Chart

/Charger Detection

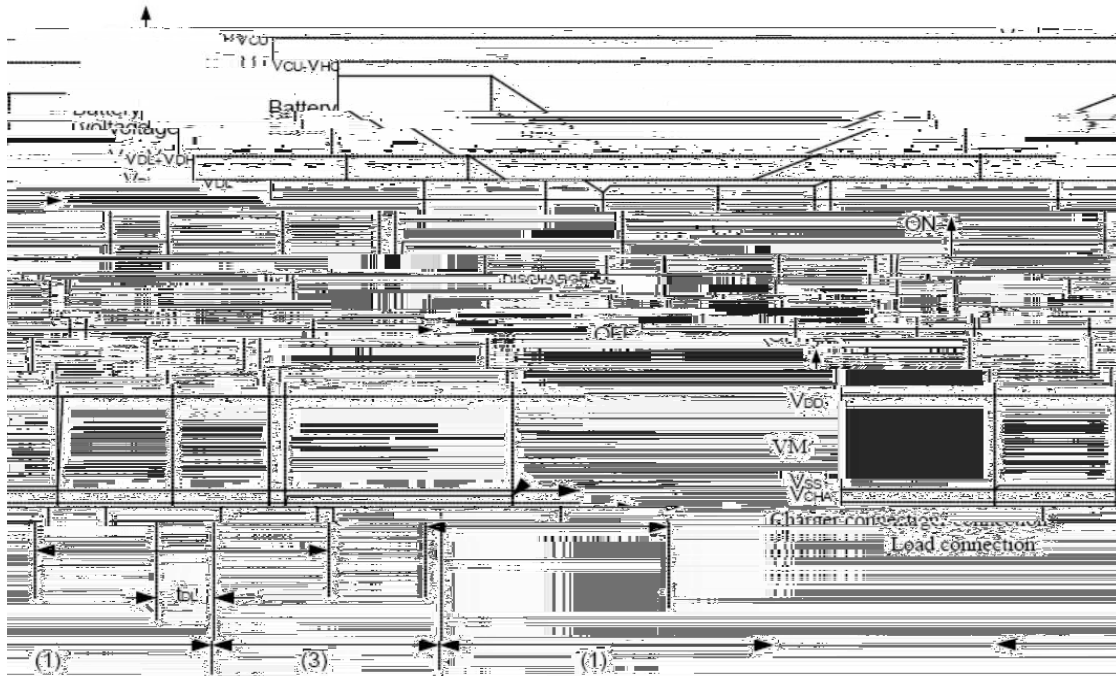


/Abnormal Charge Detection

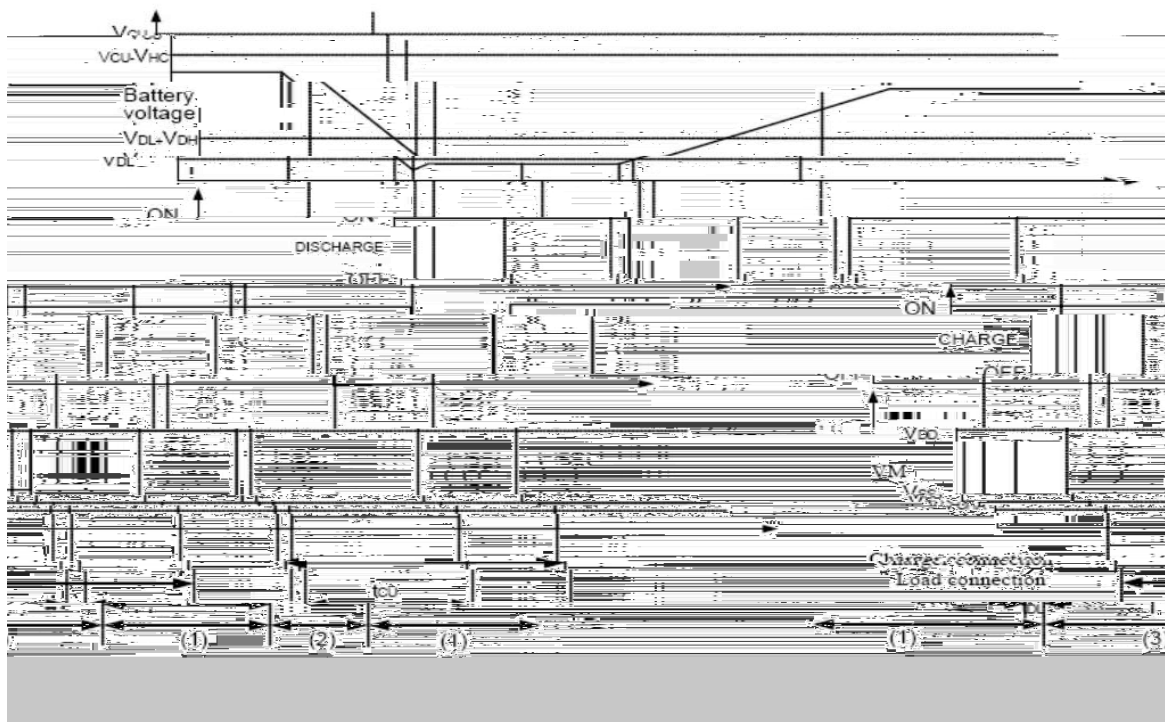


Notes: (1) Normal condition (2) Overcharge voltage condition (3) Overdischarge voltage condition (4) Overcurrent condition


/ Package Dimensions

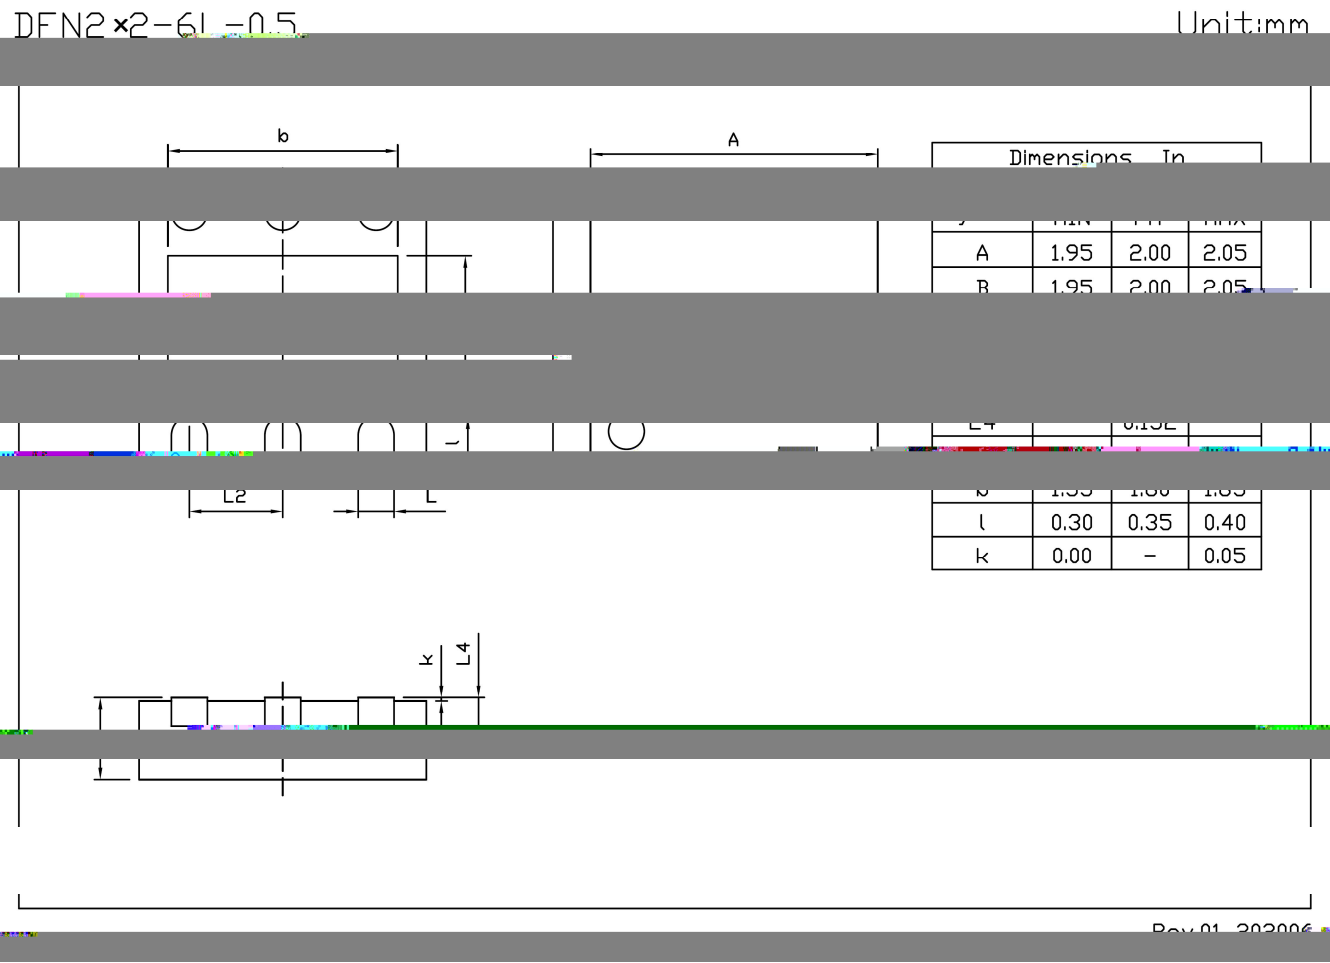


/ Marking Instructions



正面俯视图



正面透视图

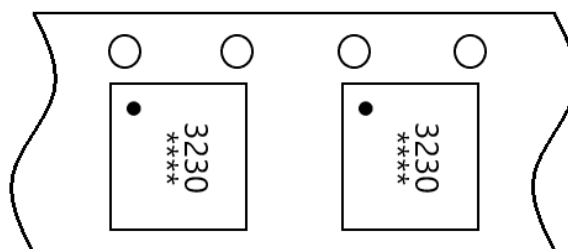

编带示意图

3230

Note:


3230:

Product Type.

****:

Lot No. Code, code change with Lot No.

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

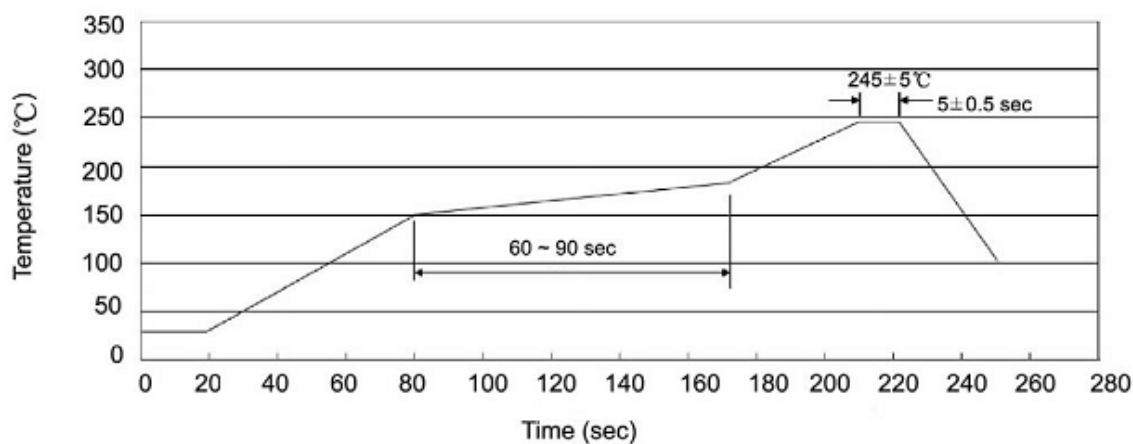

Note:

- | | | | | | |
|---|-------|-----|-----------|--------|--|
| 1 | 150 | 180 | 60 | 90sec; | 1.Preheating:150~180°C, Time:60~90sec. |
| 2 | 245±5 | | 5±0.5sec; | | 2.Peak Temp.:245±5°C, Duration:5±0.5sec. |
| 3 | | 2 | 10°C/sec. | | 3. Cooling Speed: 2~10°C/sec. |

/ Resistance to Soldering Heat Test Conditions

260±5°C 10±1 sec. Temp.:260±5°C Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box	Outer Box
x						"		

/ Notices