


Silicon NPN transistor in a SOT-23 Plastic Package.

High gain, good h_{FE} linearity.


TV final picture IF amplifier applications.



PIN1 Base PIN 2 Emitter PIN 3 Collector


h_{FE} Range	40~140
Marking	H16


Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	50	V
Collector to Emitter Voltage	V_{CEO}	45	V
Emitter to Base Voltage	V_{EBO}	4.0	V
Collector Current	I_C	50	mA
Emitter Current	I_E	-50	mA
	P_C	200	mW
	T_j	150	
	T_{stg}	-55 150	

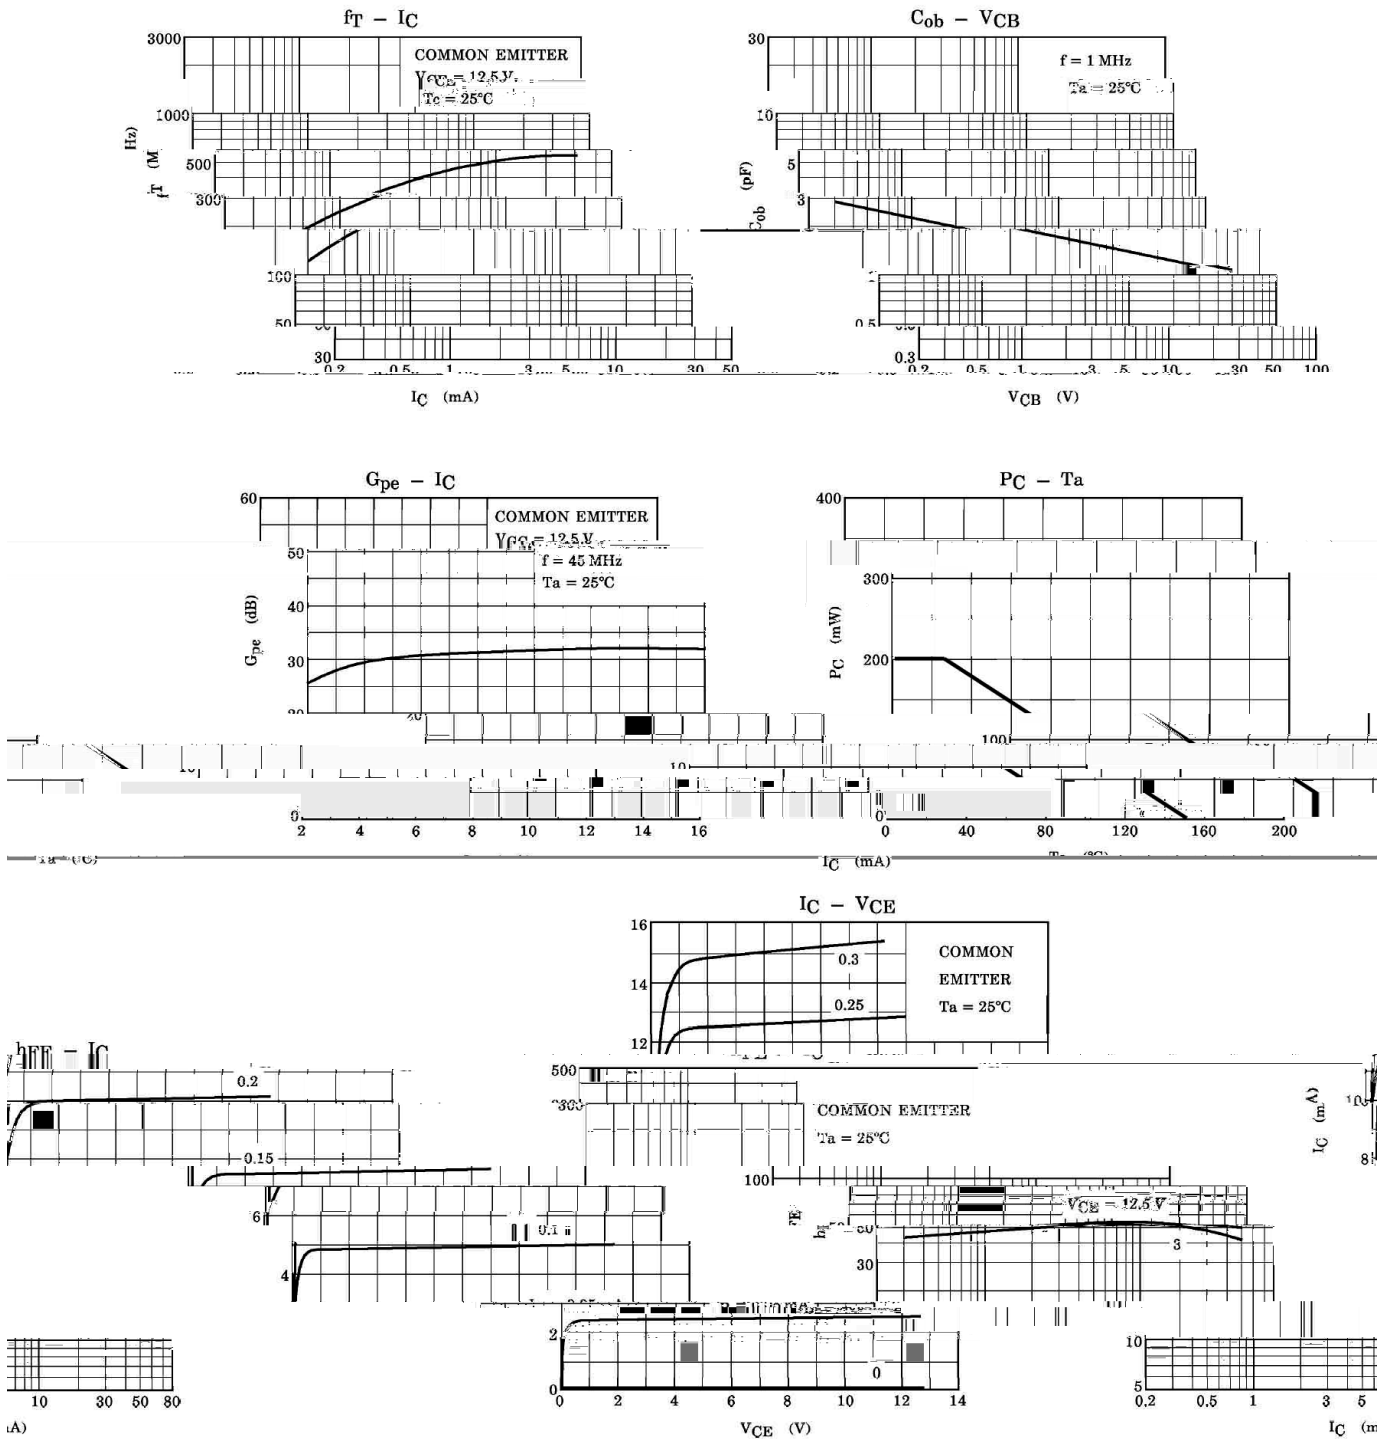

SOT-23

单位: mm

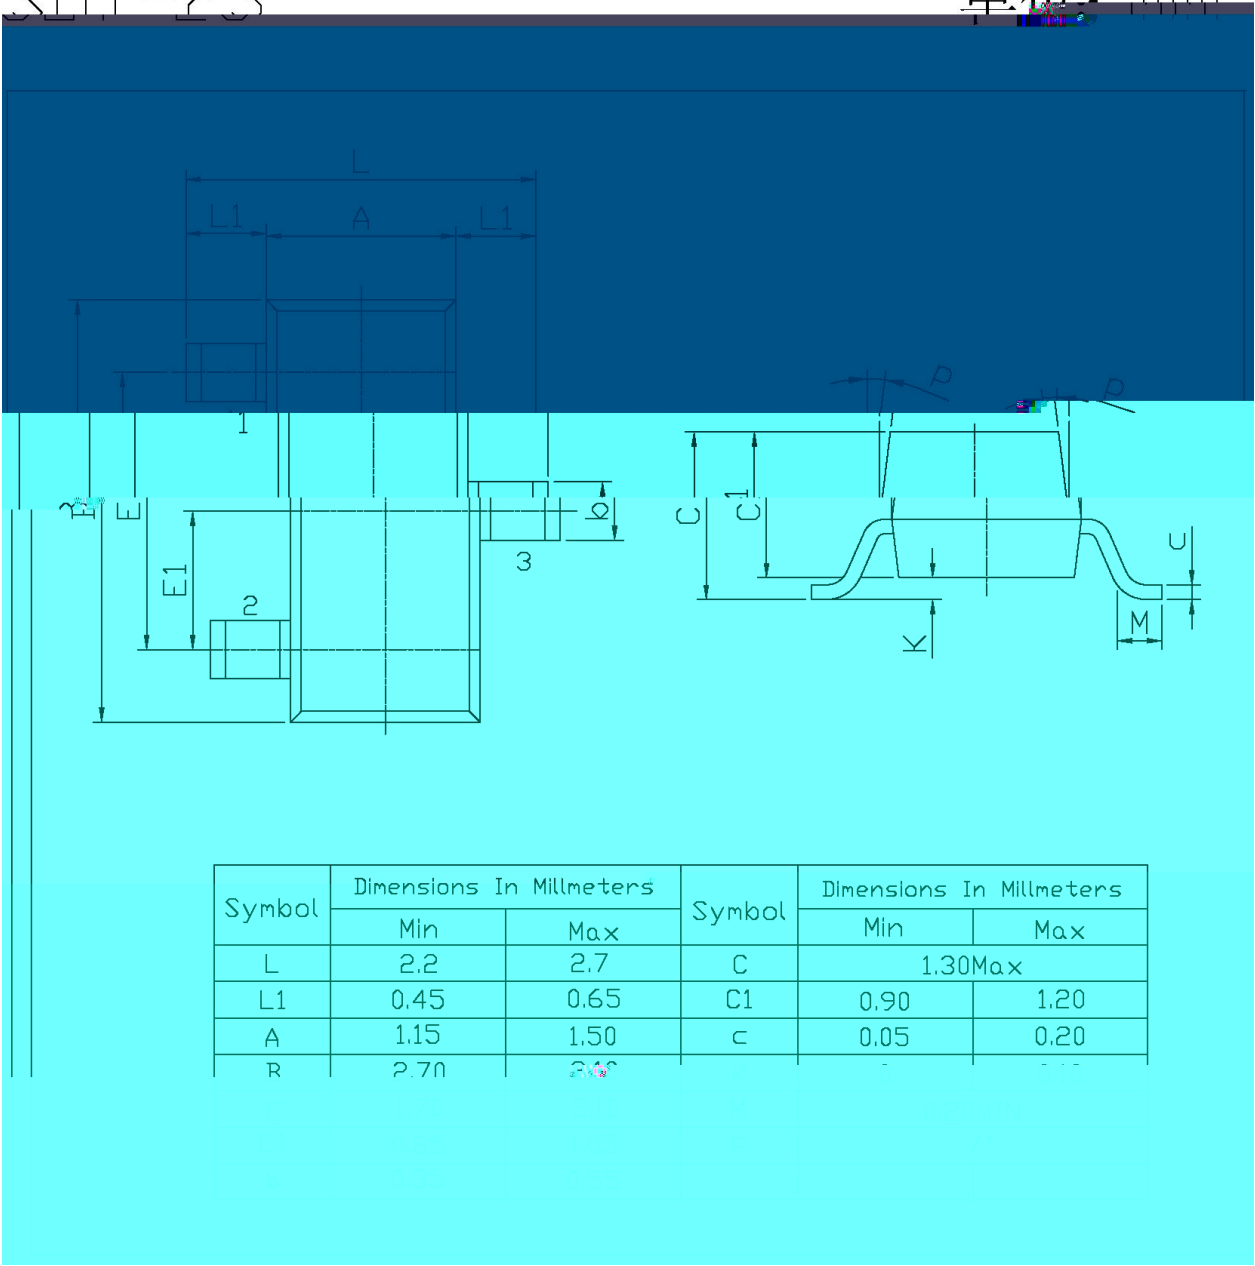

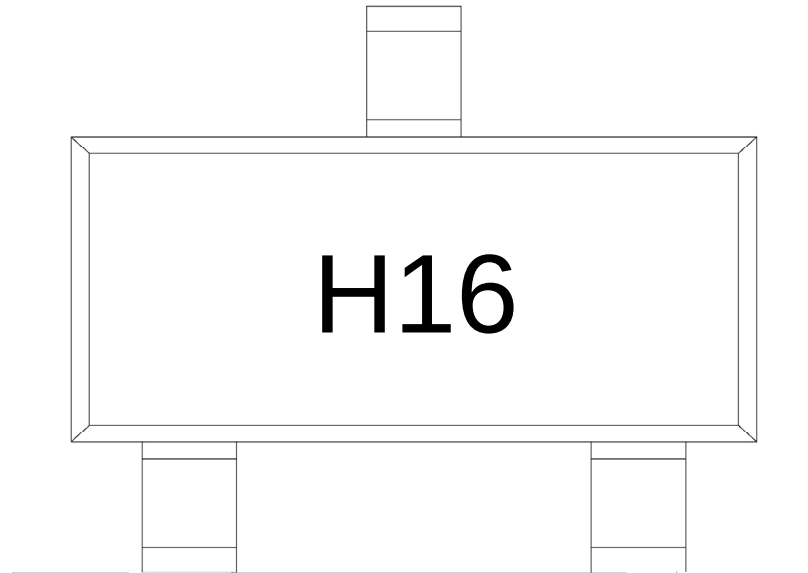


Note:

H: Company Code

16: Product Type Code

Temperature Profile for IR Reflow Soldering(Pb-Free)

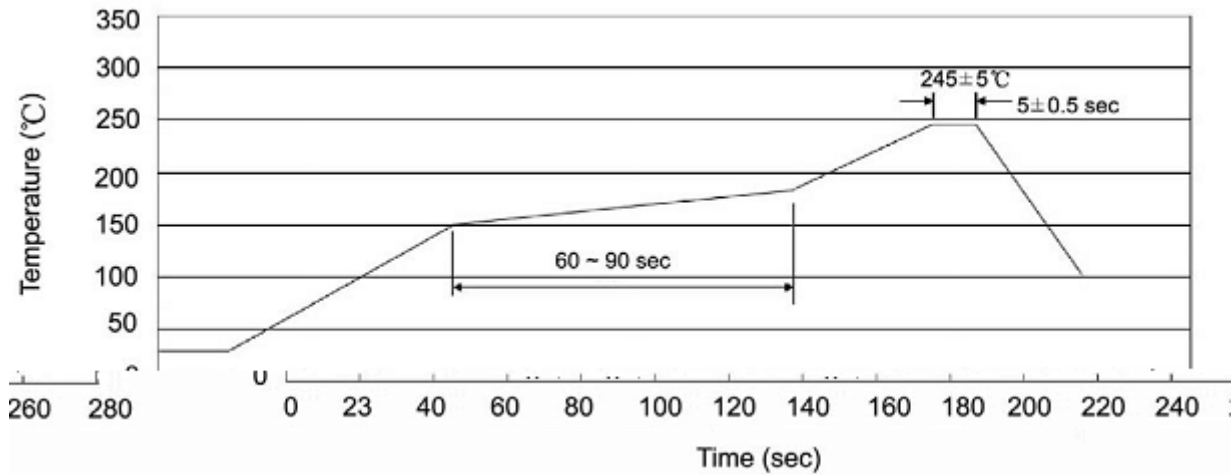

Note:

- 1

25 150

60 90sec;
- 2

245 5

5 0.5sec;
- 3

2 10 /sec.
- 1.Preheating:25~150 , Time:60~90sec.

2.Peak Temp.:245 5 , Duration:5 0.5sec.

3. Cooling Speed: 2~10 /sec.

260 5

10 1 sec.

Temp.:260±5

Time:10±1 sec

/ REEL

Package Type 封装形式	Units 包装数量	Dimension 包装尺寸 (unit: mm ³)
----------------------	------------	---