


/ Descriptions

/ Features


1.5A,

/ Applications

/ / Equivalent Circuit or Application Circuit

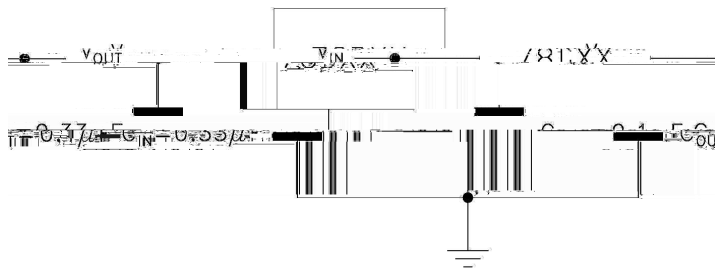

/ Pinning

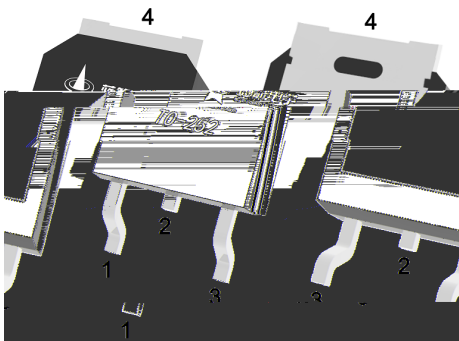

/ Marking







/ Absolute Maximum Ratings(Ta=25)

	θ		
	θ		


/ Electrical Characteristics(Ta=25 Vi=19V,Io=500mA unless otherwise specified)

		≤				
						μ
						Ω

/ Electrical Characteristic Curve

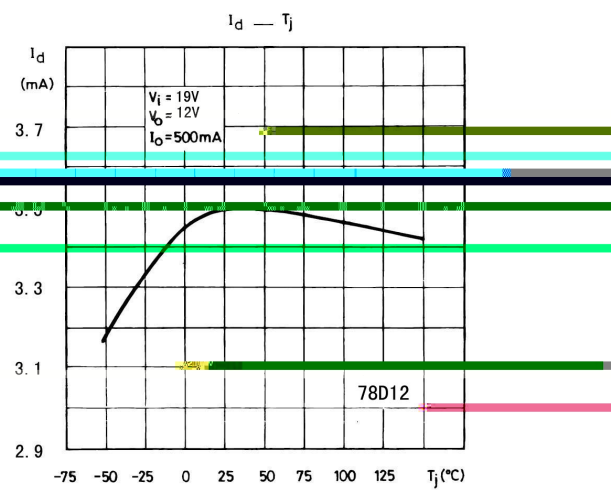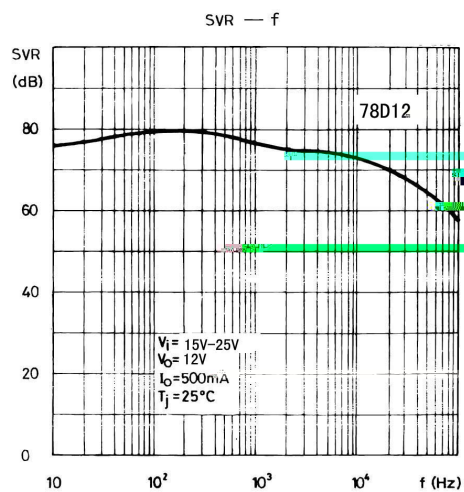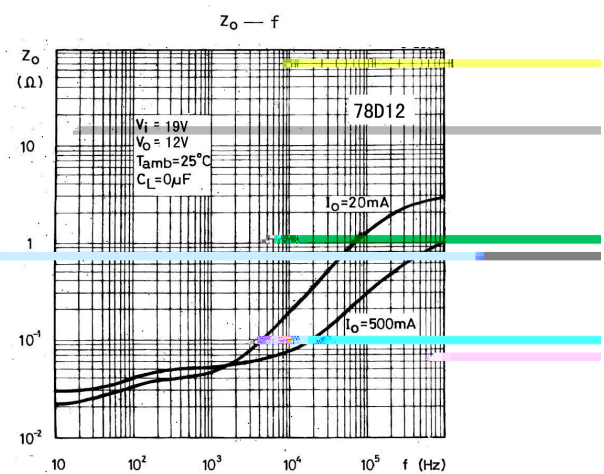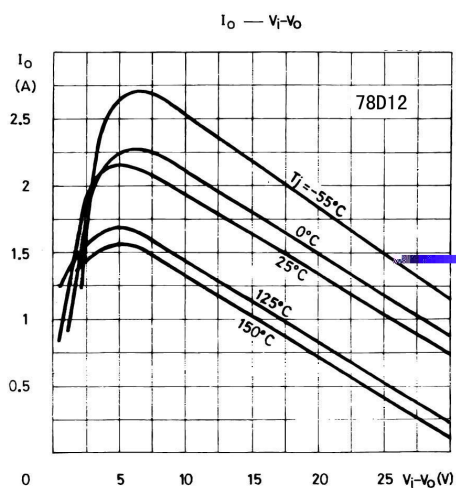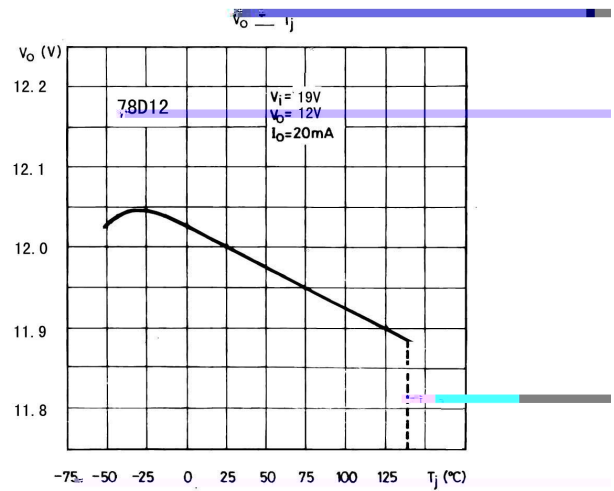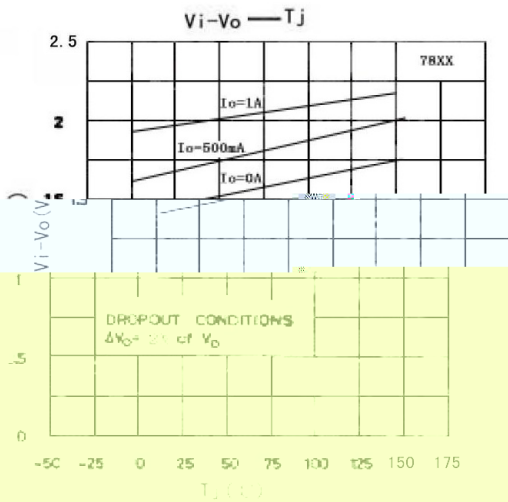

/ Package Dimensions

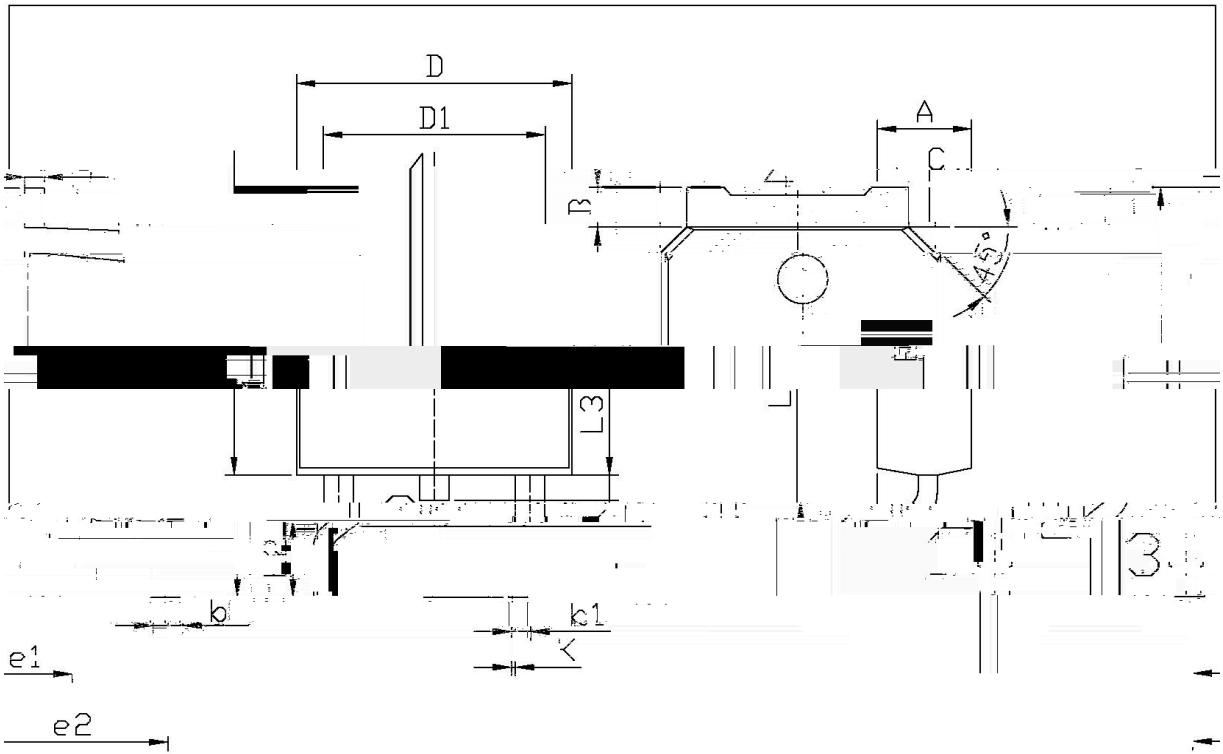


单位: mm

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
L	5.95	6.25	A	2.20	2.40
e1	2.24	2.34	B	0.95	1.25
e2	4.48	4.73	b	0.70	0.90
L1	9.85	10.35	b1	0.45	0.55
C	0.45	0.55	L2	1.70	2.00
D	6.45	6.75	D1	5.10	5.50
L3	1.30	1.50			

T0-252

/ Marking Instructions

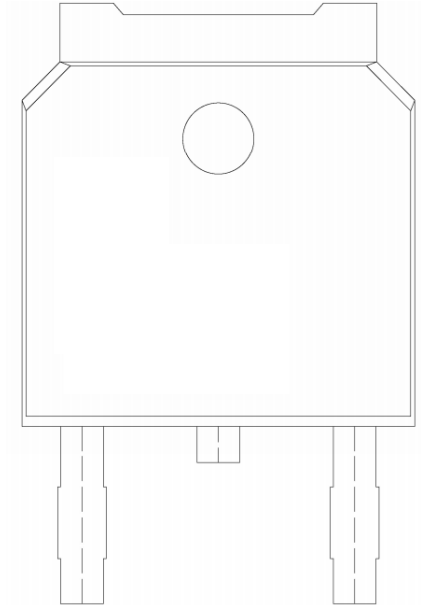

BR

78D12

 $\pm$ $\pm$

6 6