


“Y / Descriptions

• Ę / Features

v / Applications

л ˆ ǻ ± / Equivalent Circuit



ã ı ů / Pinning



Ł. Һ Ć / Marking

--	--


绝对最大额定值 / Absolute Maximum Ratings(Ta=25 ℃)

	μ		

电 学 特 性 / Electrical Characteristics(Ta=25 ℃)

						μ
						μ
						μ
		Ω				


Electrical Characteristic Curve

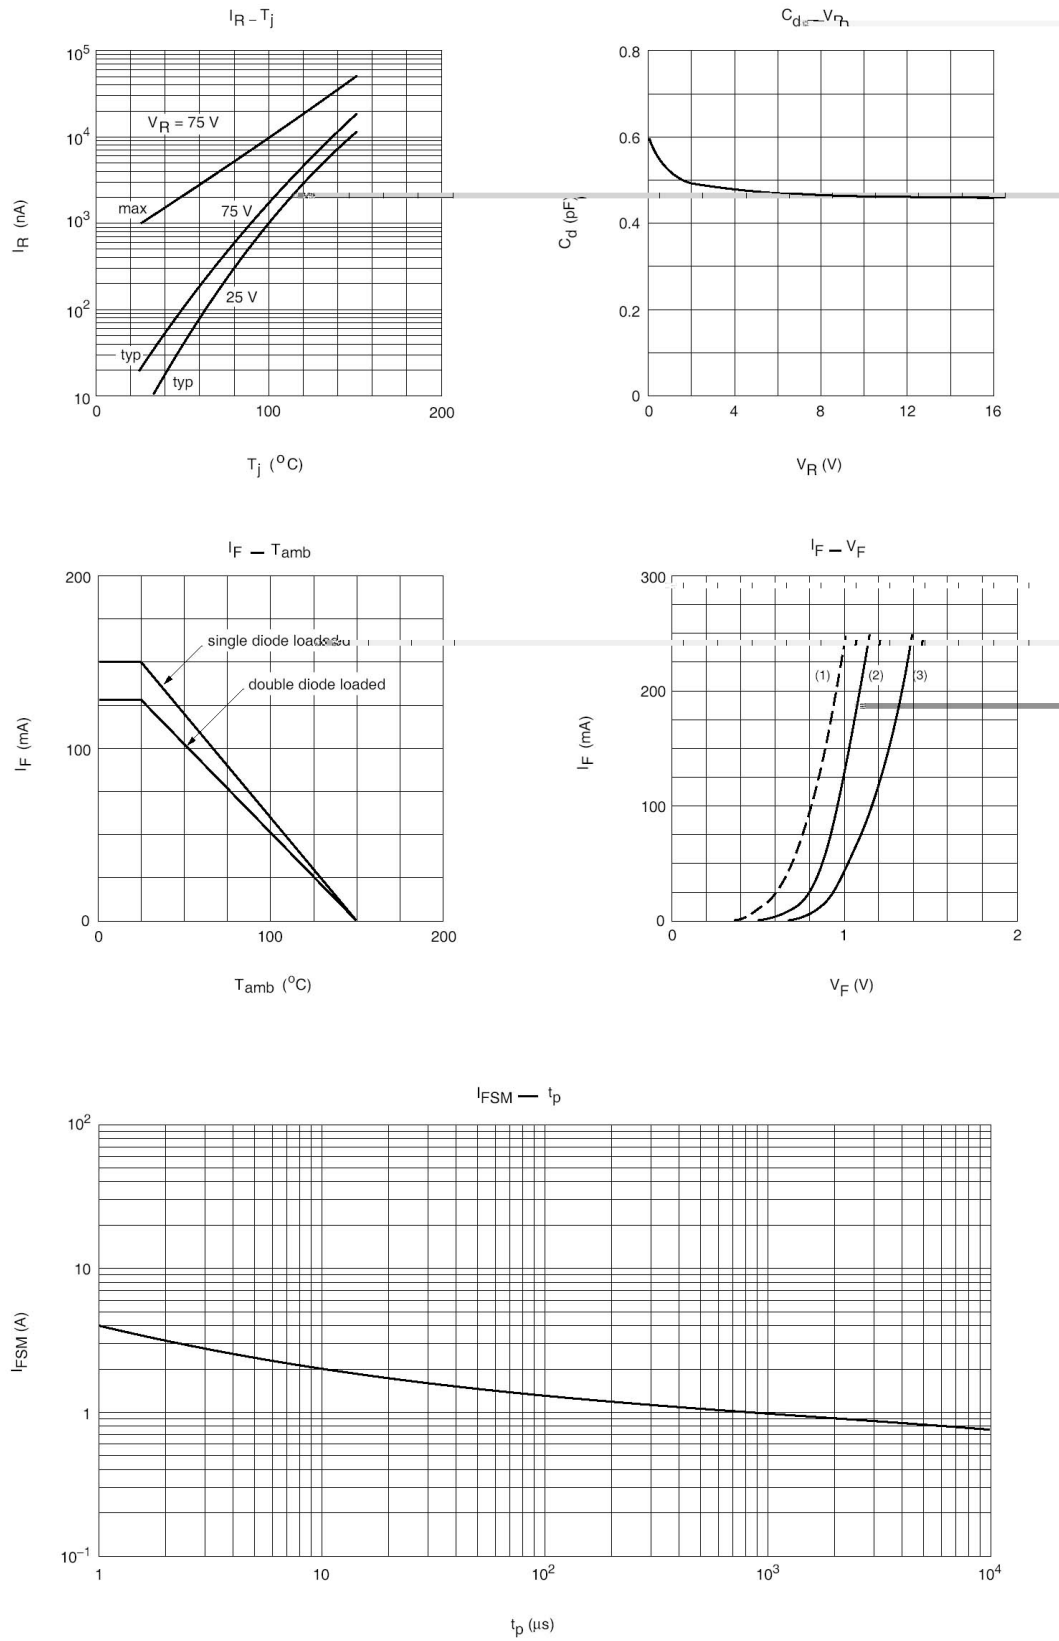

⌘ È Ò Ì f / Package Dimensions

SOT-323


单位; mm

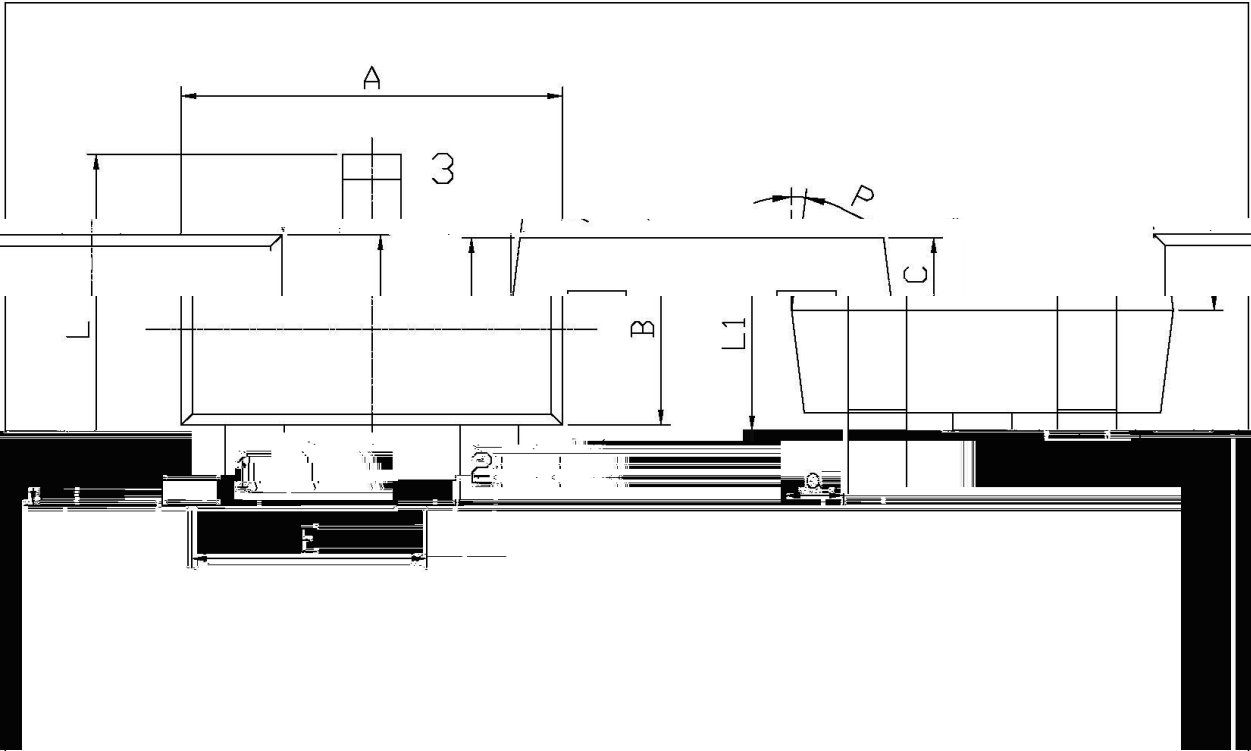


Dimensions in Millimeters			
Symbol	Min	Max	
C	0.30	0.50	
L1	0.85	1.15	
a	0.20	0.40	

Dimensions in Millimeters			
Symbol	Min	Max	Sym
A	1.95	2.35	
B	2.00	2.2	
E	1.20	1.40	

4. 符号 / Marking Instructions

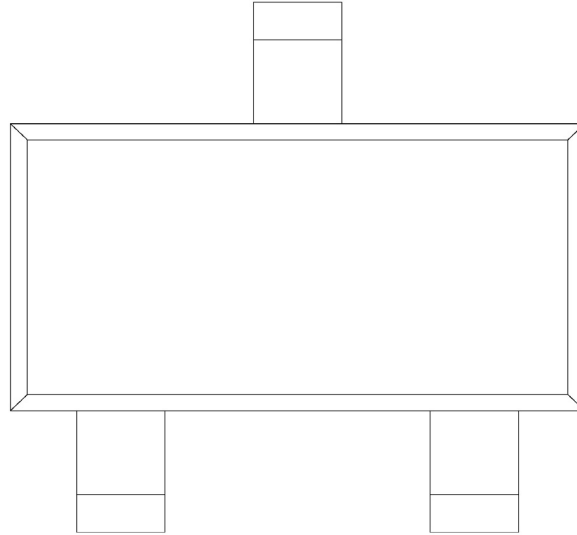

Whp shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0luhh,

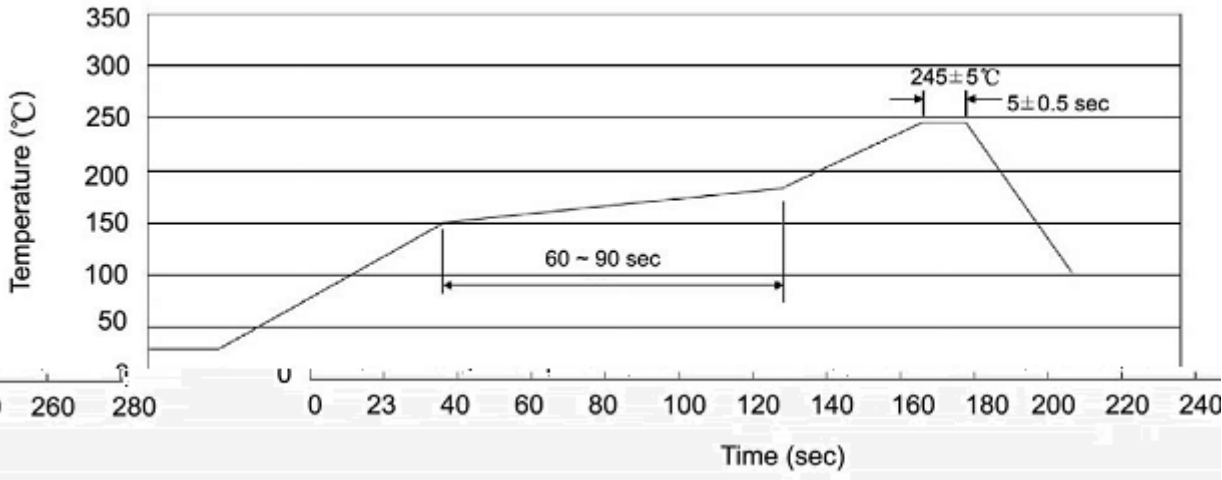

Resistance to Soldering Heat Test Conditions

Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱

Notices