

/ Descriptions


SOT-23 PNP

/ Features

I_c BC817

/ Applications

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking

	~	~	~

/ Absolute Maximum Ratings(Ta=25)


		~	

/ Electrical Characteristics(Ta=25)

		μ				
		μ				
						μ
						μ
			*			
			*			

*
≤300μS ≤2.0%
≤ μ ≤


/ Electrical Characteristic Curve

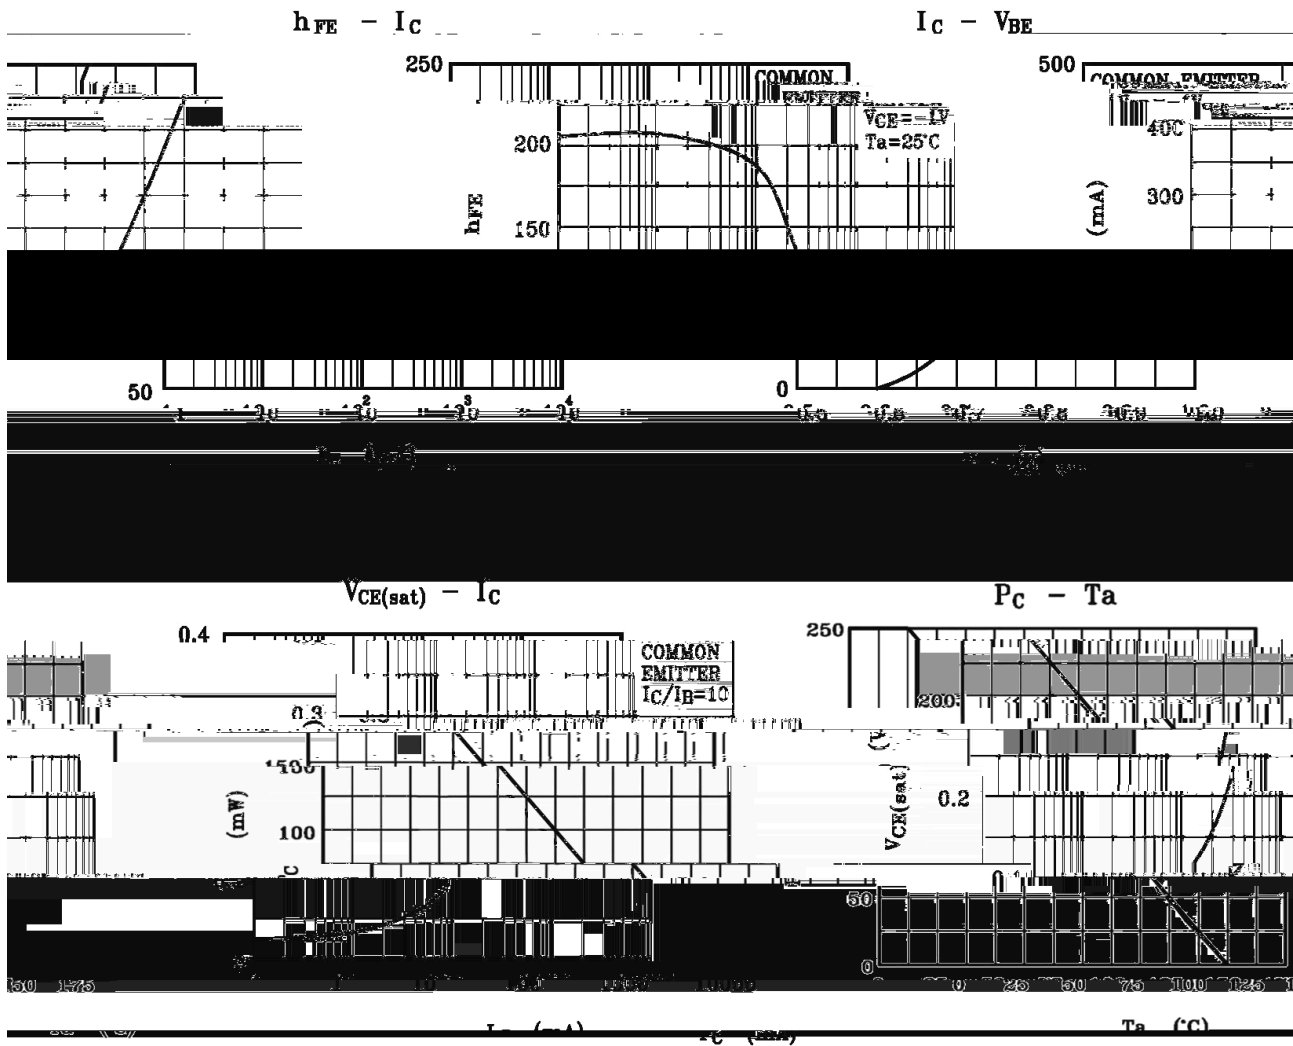


/ Package Dimensions

SOT-23

单位: mm

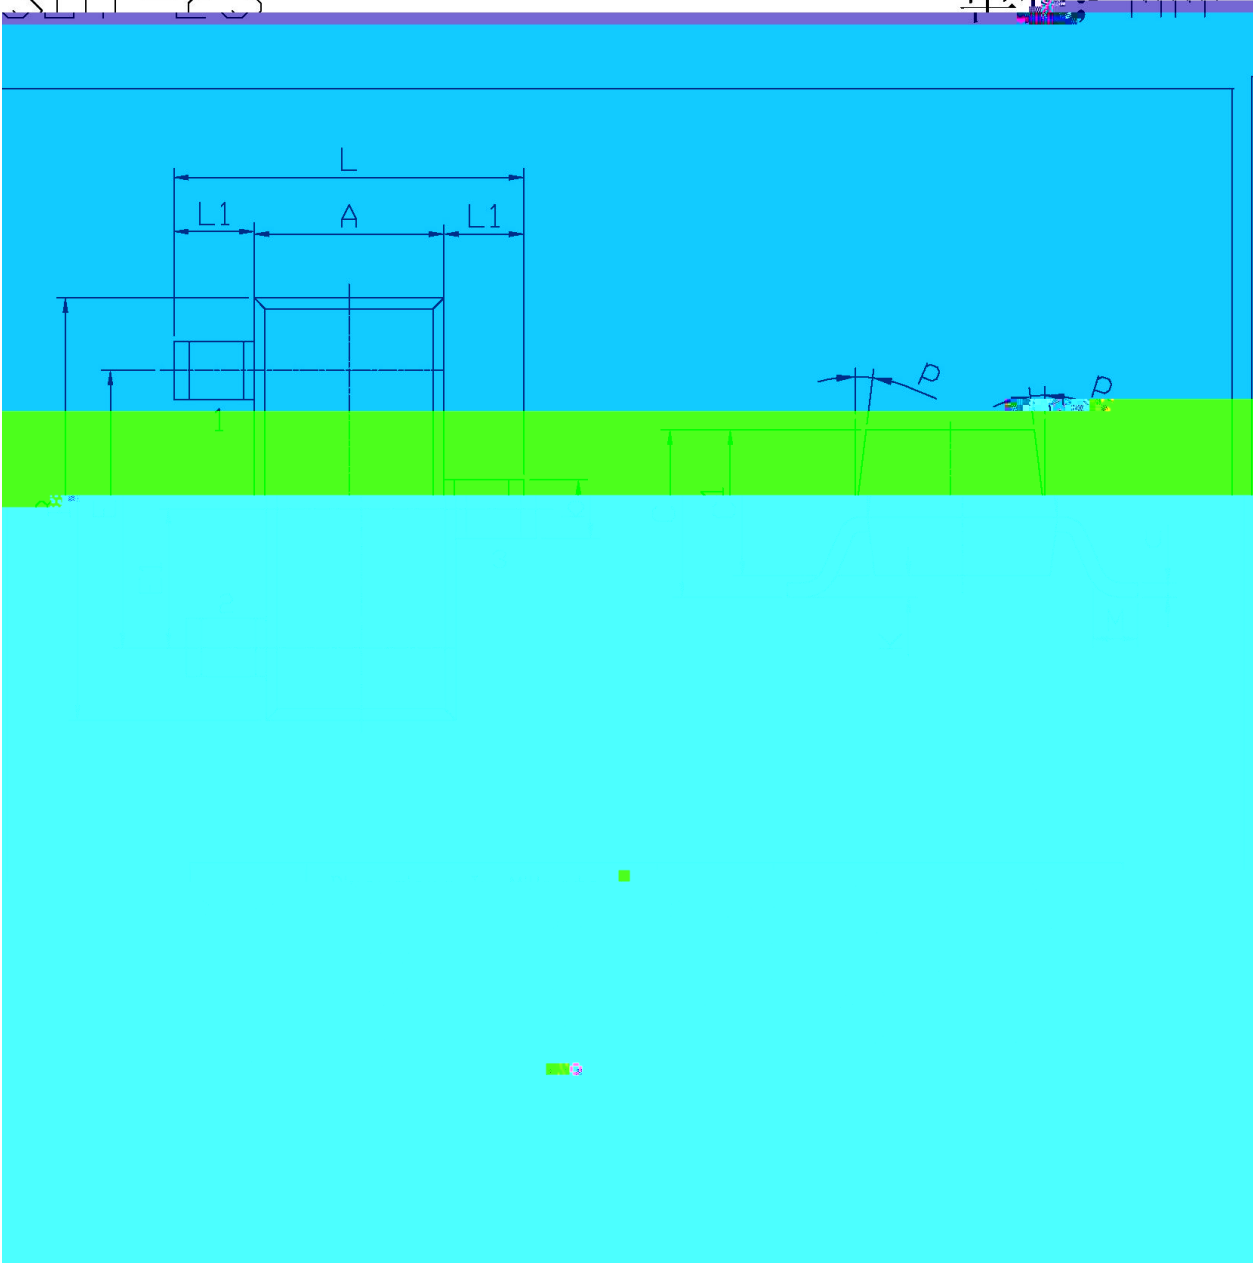


/ Marking Instructions

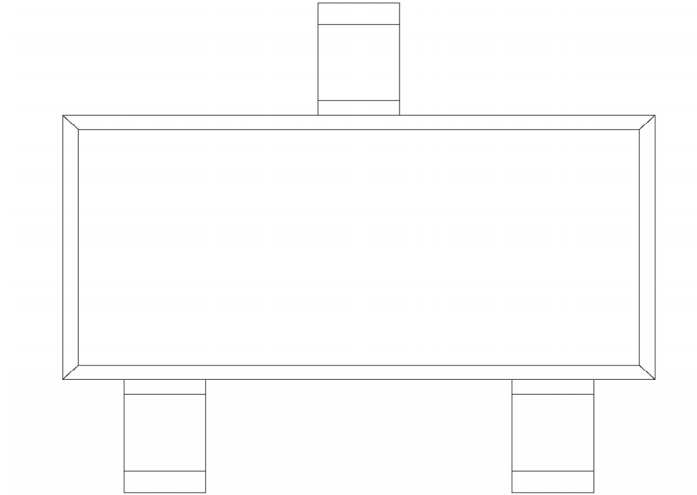

H
5A

() /

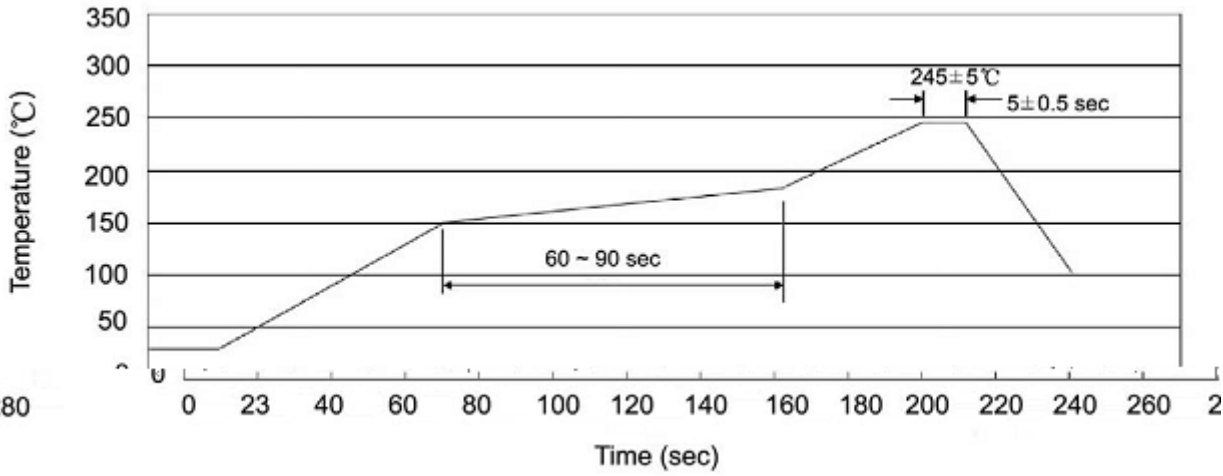

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱
						"		

/ Notices