


BR79D12Q

/ / Equivalent Circuit or Application / a) Q57ABrC5xg000bdPi0!V8qCg0A

/ Package Dimensions

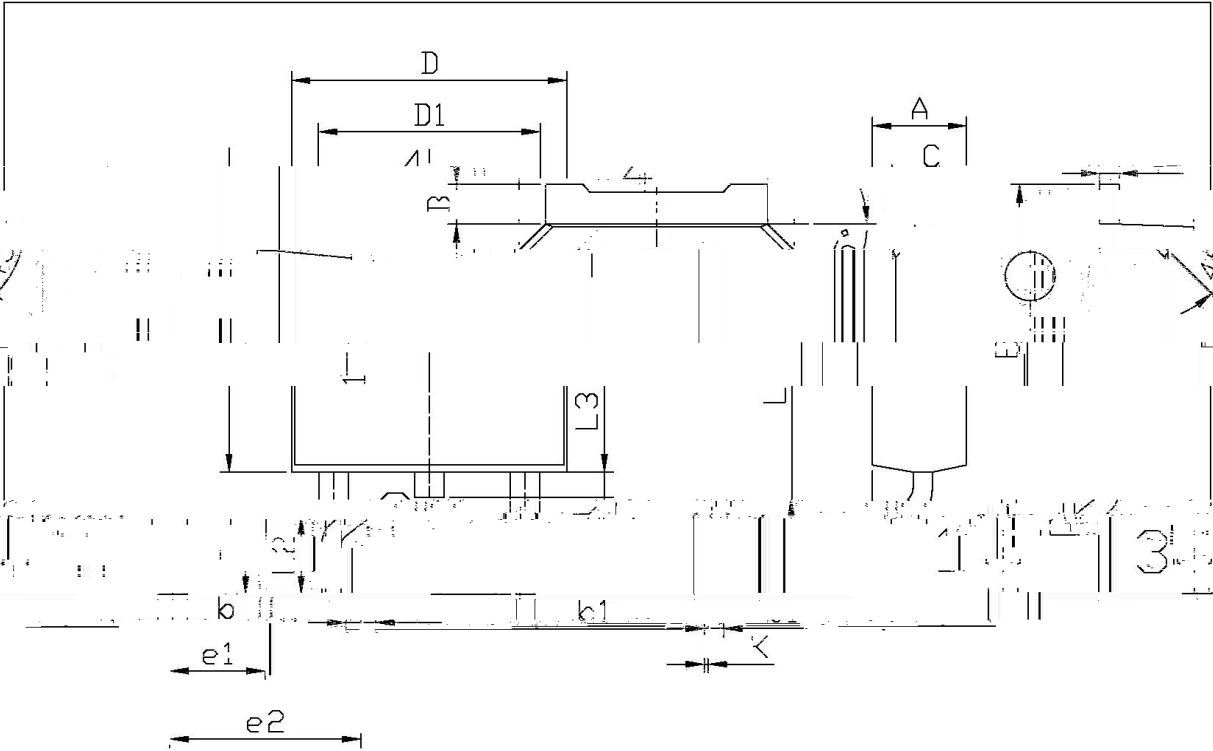


单位: mm


Dimensions In Millimeters			Dimensions In Millimeters		
Symbol	Min	Max	Symbol	Min	Max
A	2.25	2.75	b	1.40	1.60
0.95	1.25	1.50	e1	2.24	2.34
0.70	0.60	0.80	e2	4.43	4.73
0.45	0.55	0.65	L1	9.85	10.35
	0.45	0.55	L2	1.70	2.00
D	6.45	6.75	L3	0.60	0.90
D1	5.10	5.60		0.50	0.10

T0-252

/ Marking Instructions

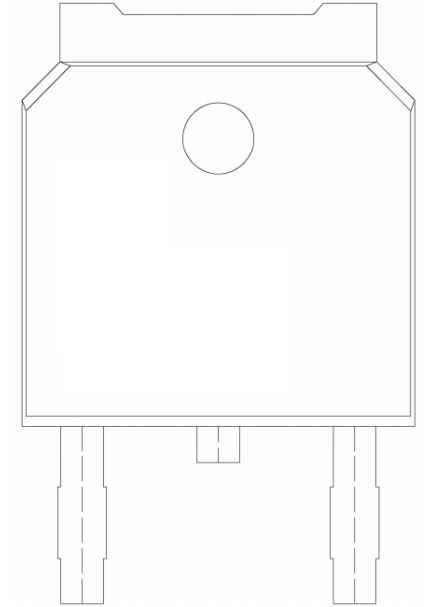

() /

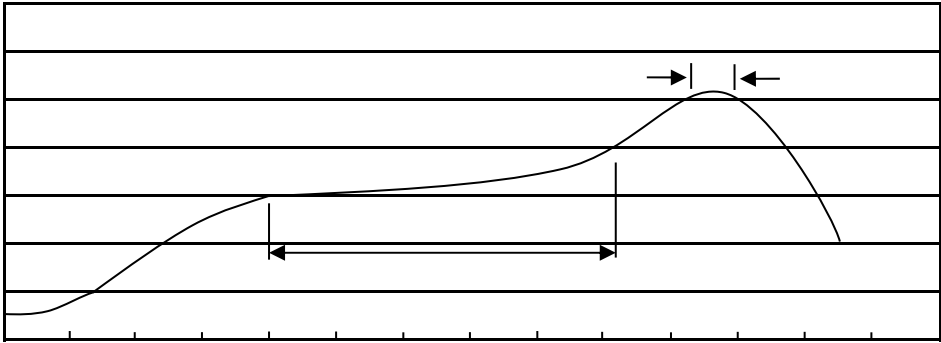

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box

/ Notices