

/ Descriptions


/ Features

533 p Z / DHF0T434


/ Applications

517Y06<Y

/ Equivalent Circuit



/ Pinning

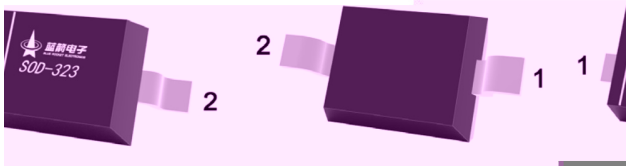

/ Marking




	θ		

[illegible]

BRBZT52BXXSQ

/ Electrical Characteristics(Ta=25

/ Package Dimensions

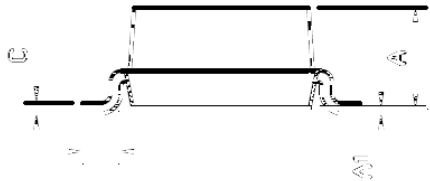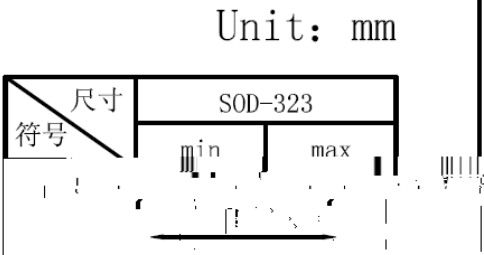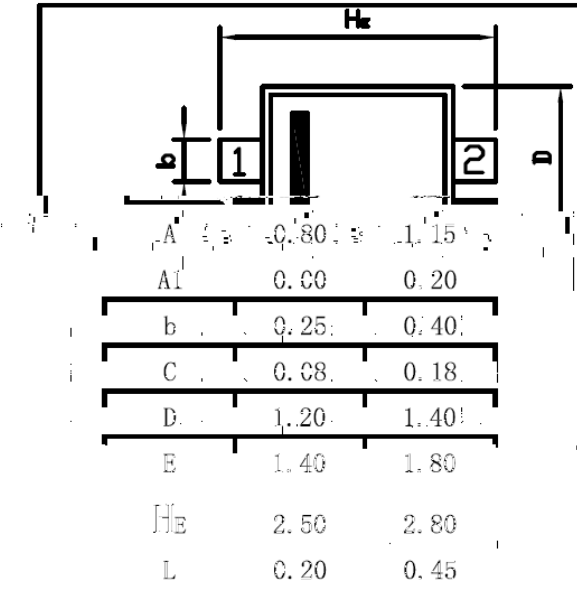


1
-323

PIN 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100
SOD

BRBZT52BXXSQ

DATA SHEET

() /

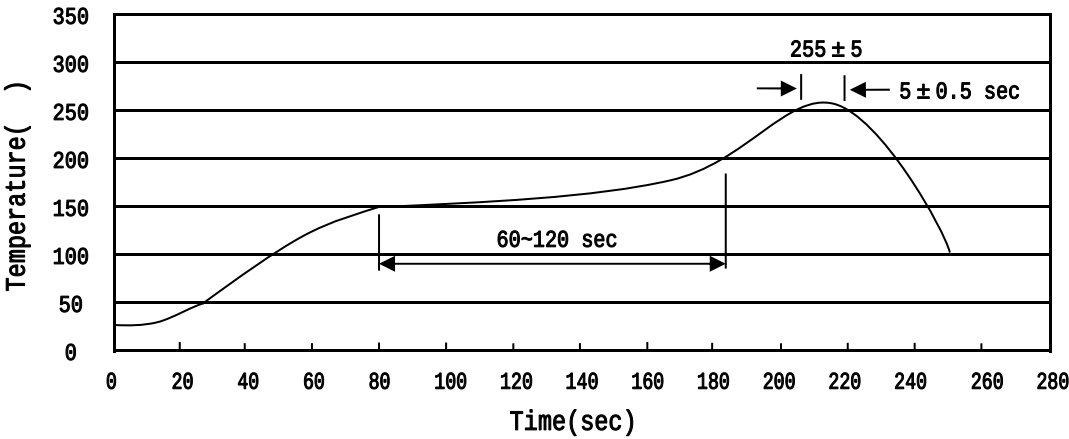

$\frac{3}{8}$ $\frac{3}{8}$
2 $\frac{3}{8}$ 2 2 $\frac{3}{8}$ 2
 $\frac{3}{8}$ $\frac{3}{8}$

/ Resistance to Soldering Heat Test Conditions

2 $\frac{3}{8}$ 2 2 $\frac{3}{8}$ 2

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
SOD-323	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205

/ Notices