


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit

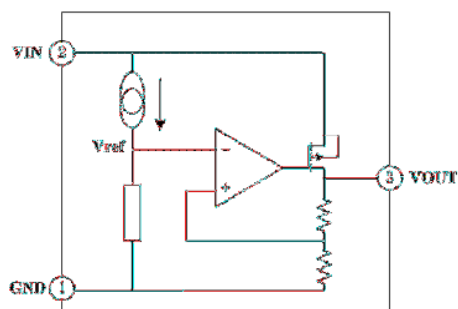

/ Pinning

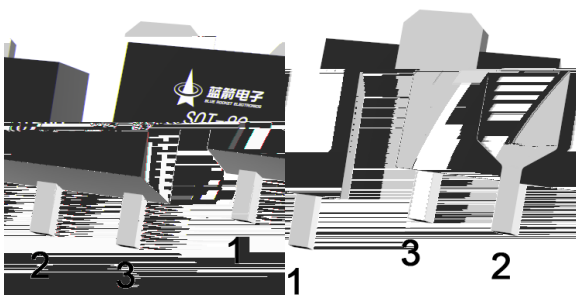

/ Marking




/ Absolute Maximum Ratings(Ta=25)

	θ		




/ Electrical Characteristics(Ta=25)

		$\leq \leq$				
						μ
		$\leq \leq$				
		$\leq \leq$				

/ Typical Application Circuit

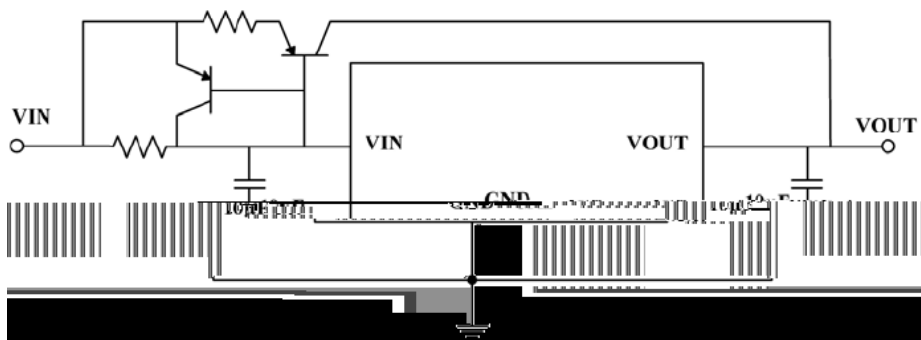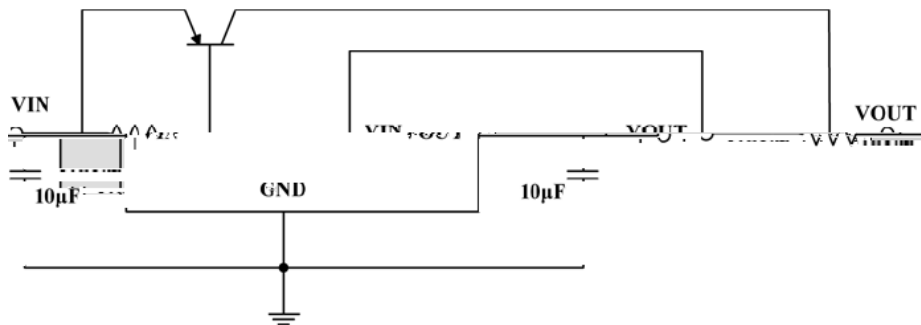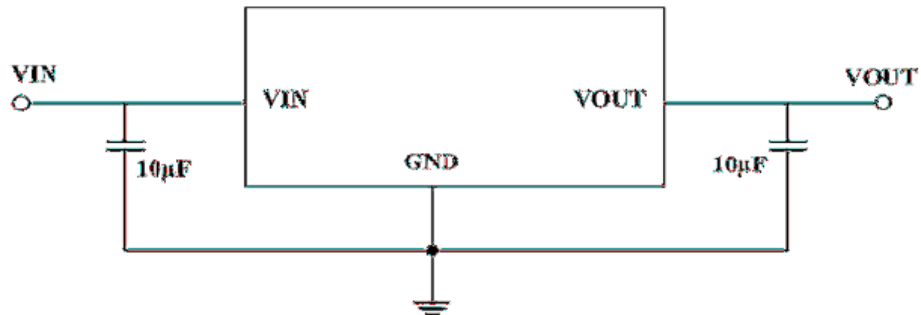


/ Typical Application Circuit

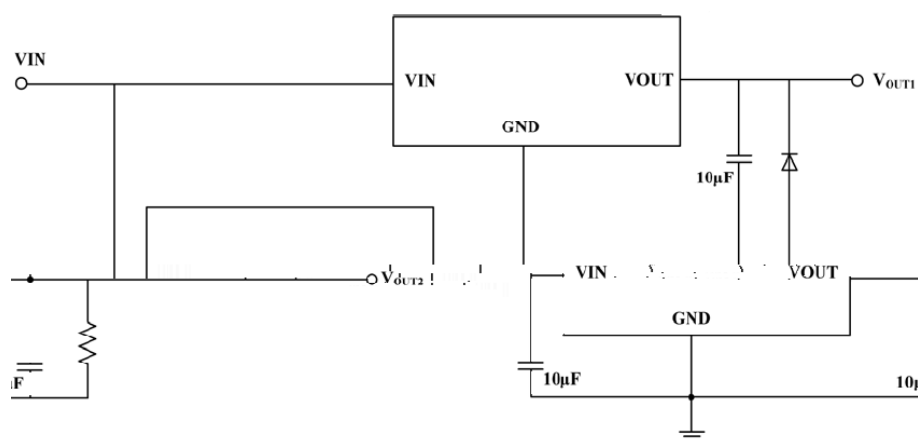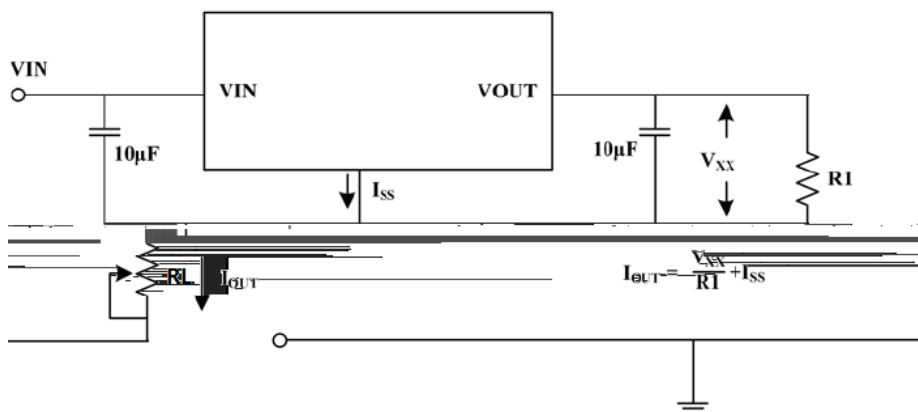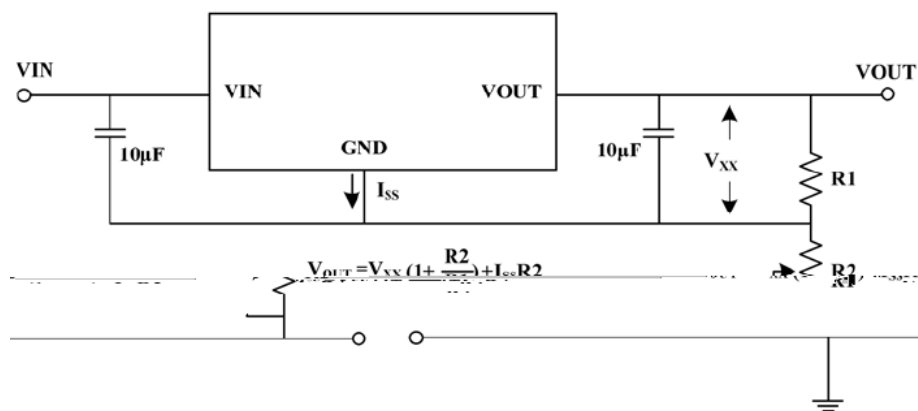


/ Package Dimensions


单位: mm

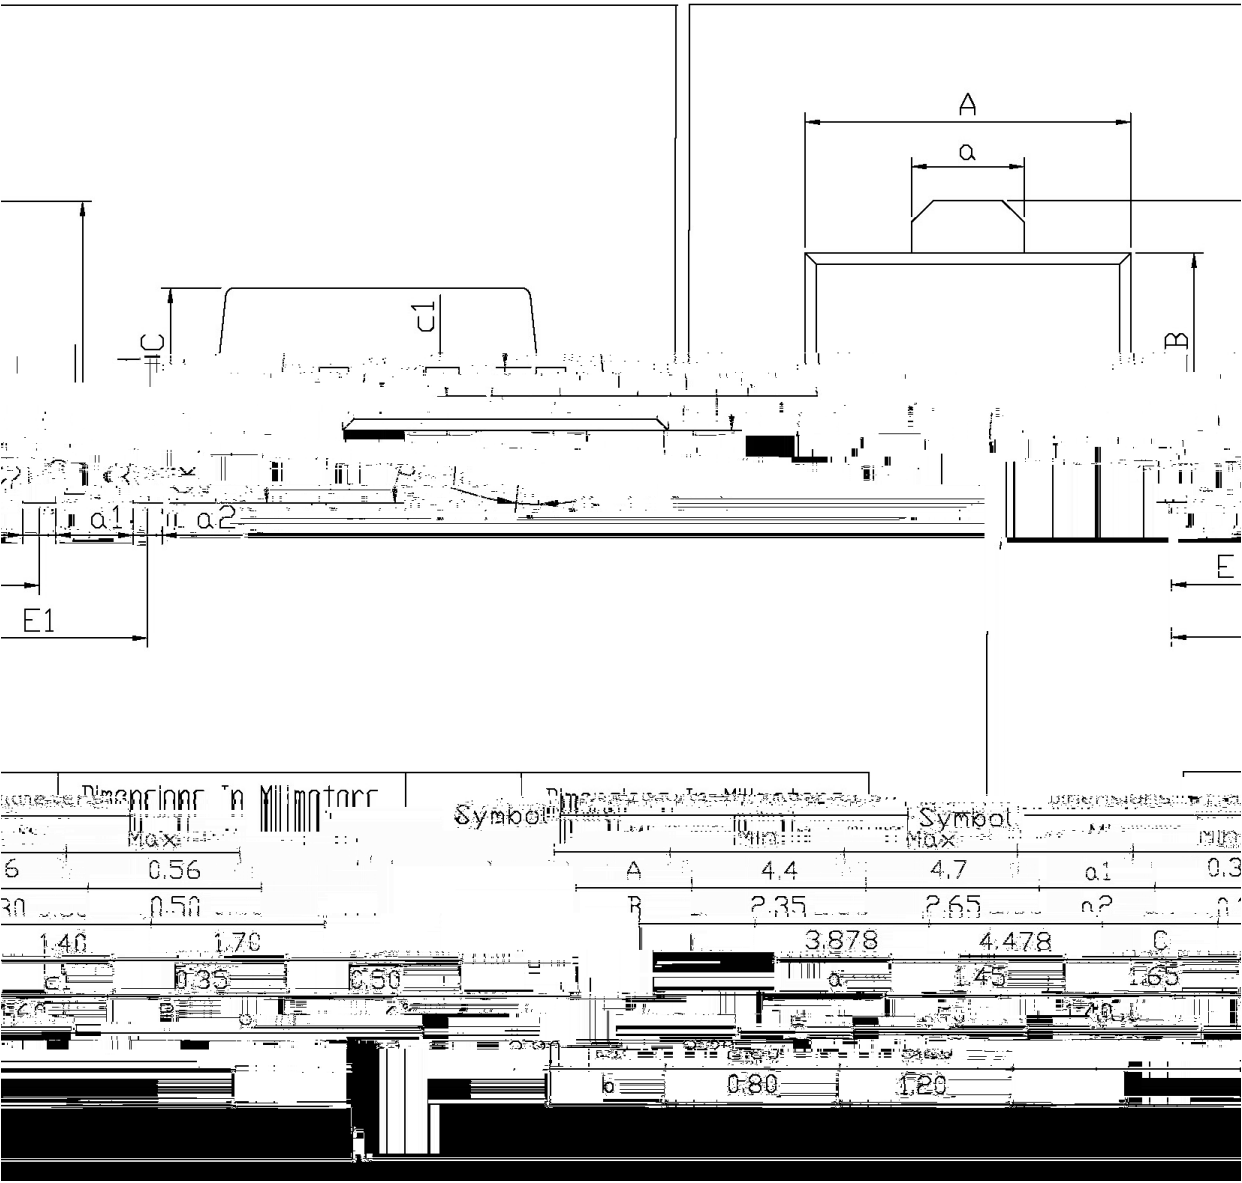

/ Marking Instructions

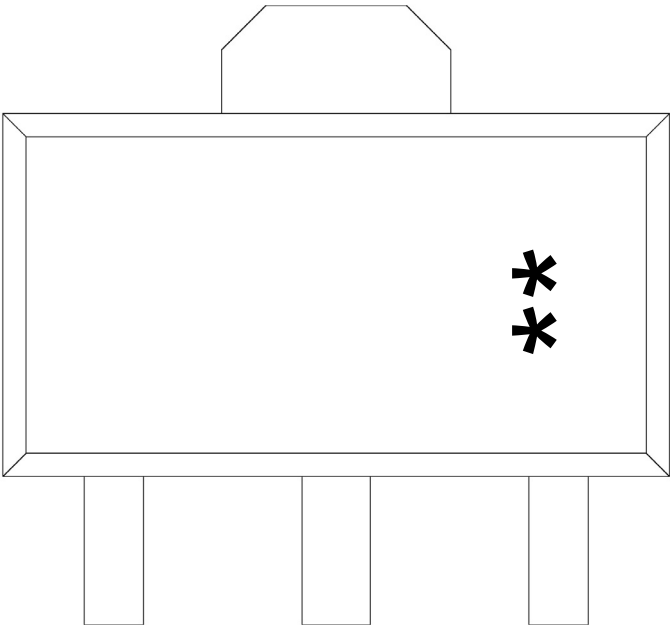

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

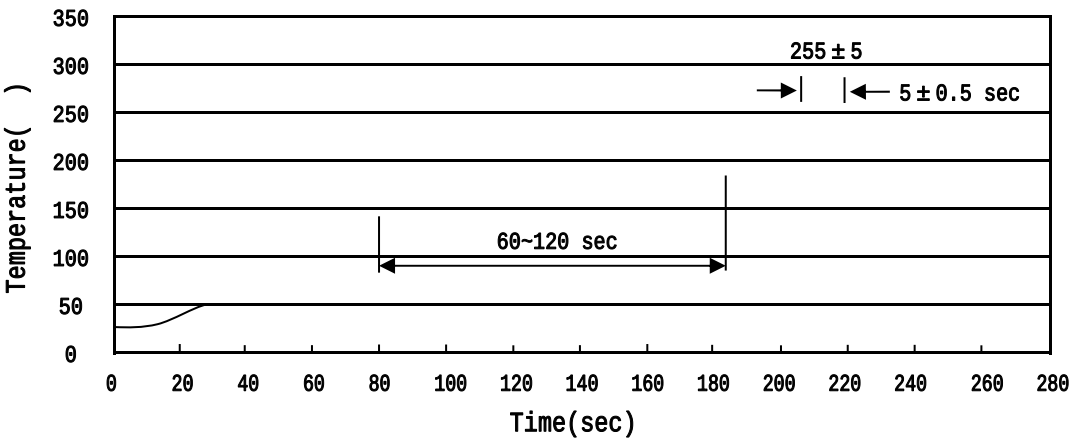

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

/ Notices