

/ Descriptions


×

×


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning

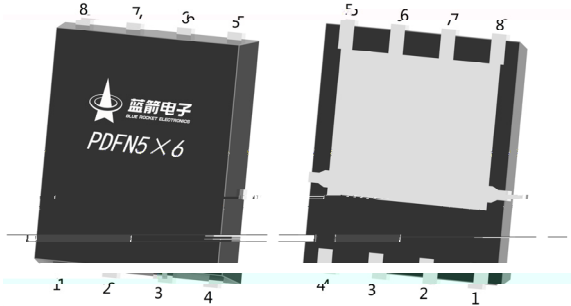

Pin	极性
1	S
2	S
3	S
4	G
5	D
6	D
7	D
8	D

/ Marking

。

/ Absolute Maximum Ratings(T_a=25)

			±	
		℃		
	≤			
		θ		
		θ		

/ Electrical Characteristics(T_a=25)

					±	
						Ω

/ Electrical Characteristics(Ta=25)

		Ω Ω				

/ Electrical Characteristic Curve

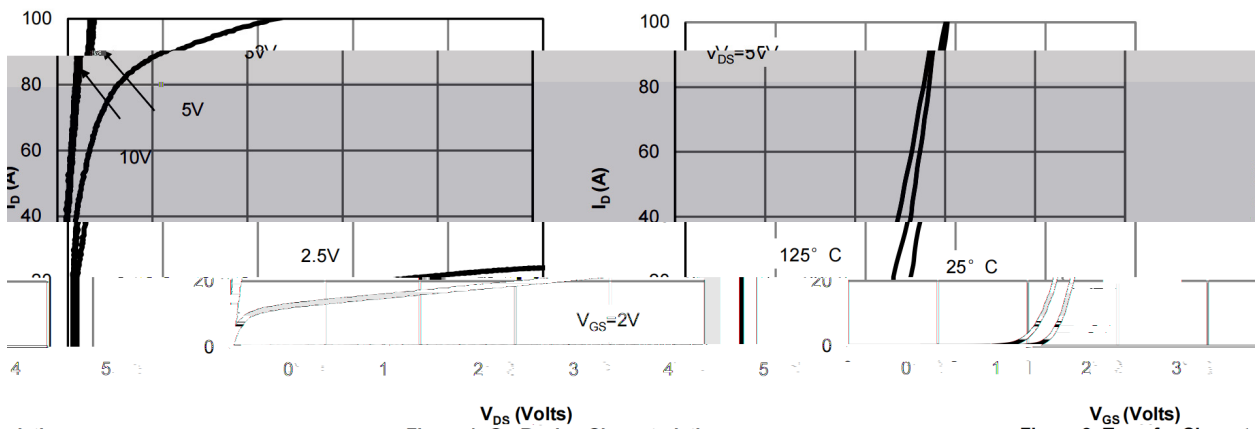


Figure 1: On-Region Characteristics

Figure 2: Transfer Characteristics

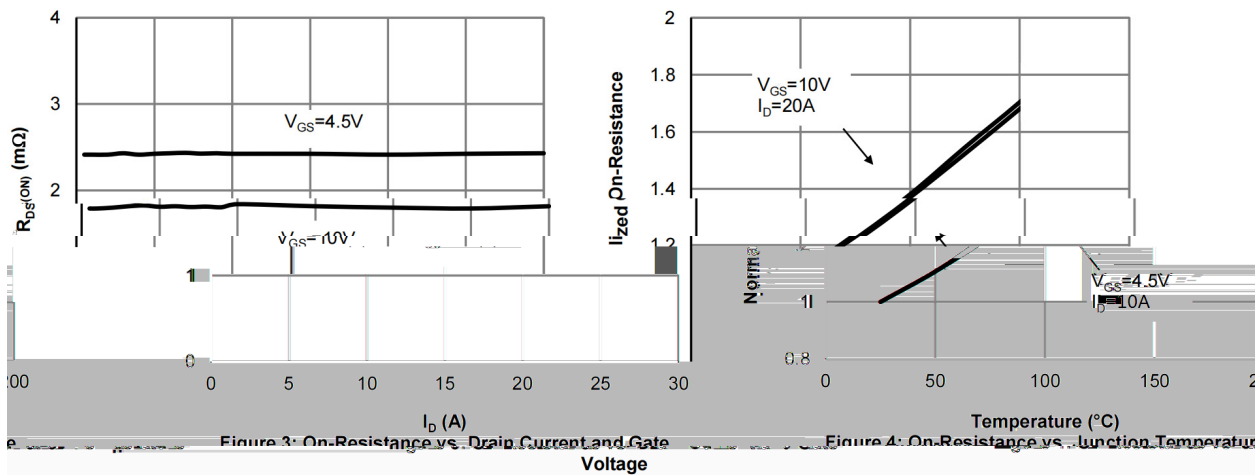


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

Figure 4: On-Resistance vs. Junction Temperature





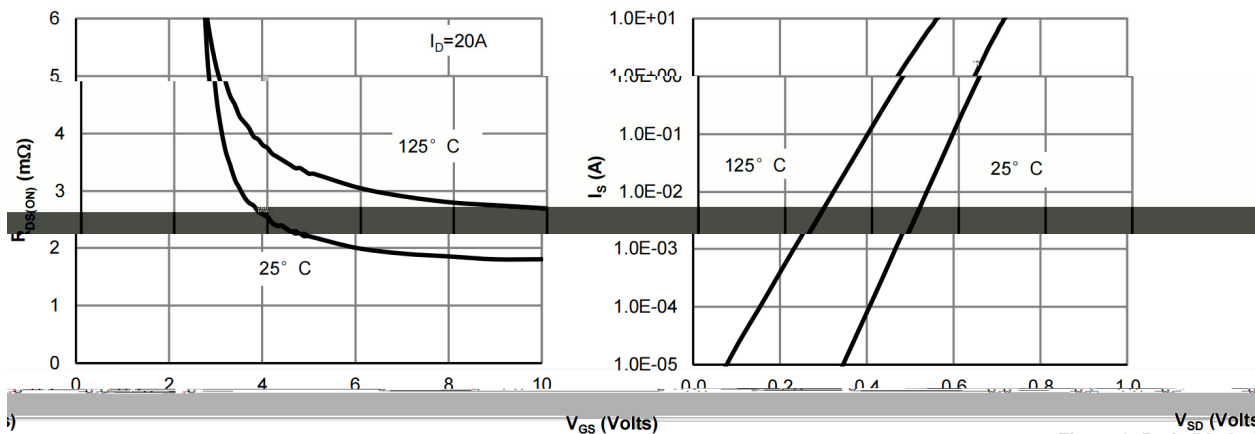



Figure 5: On-Resistance vs. Drain-Source Voltage

Figure 6: Body Diode Characteristics

/ Electrical Characteristic Curve

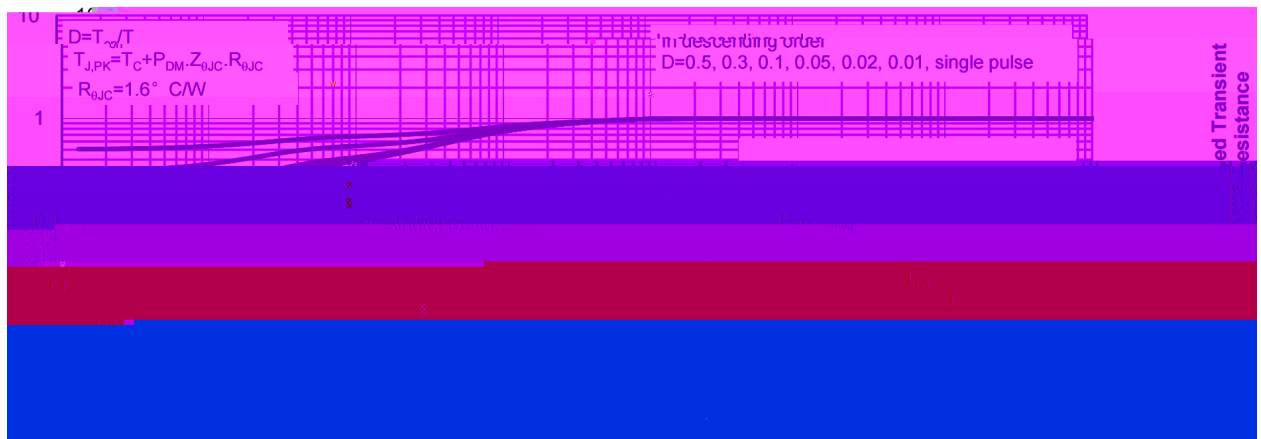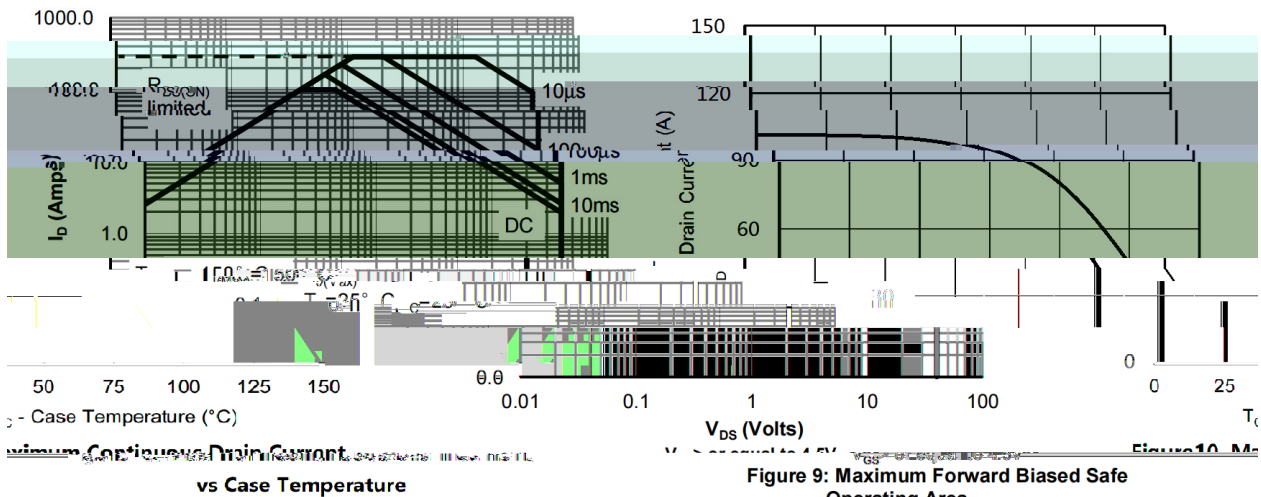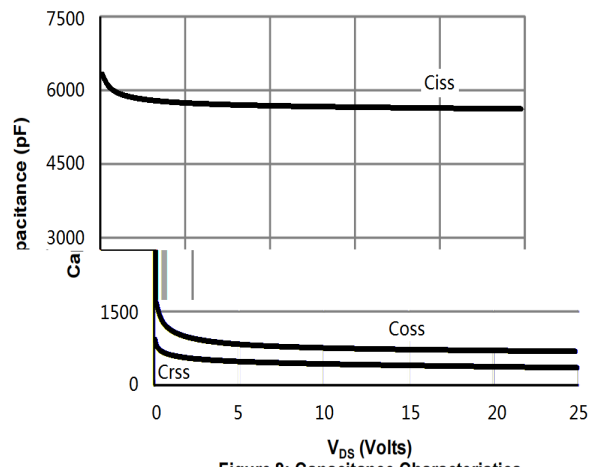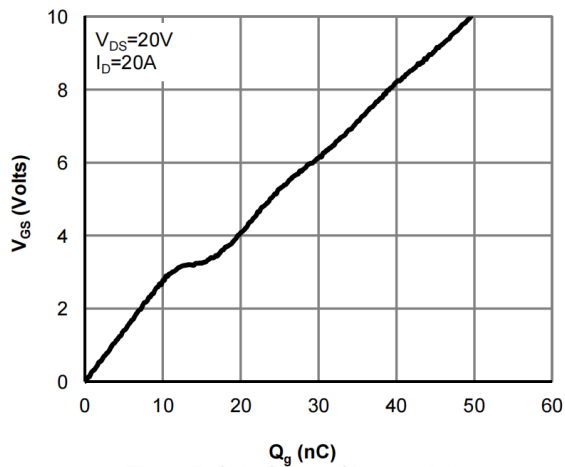


/ Package Dimensions

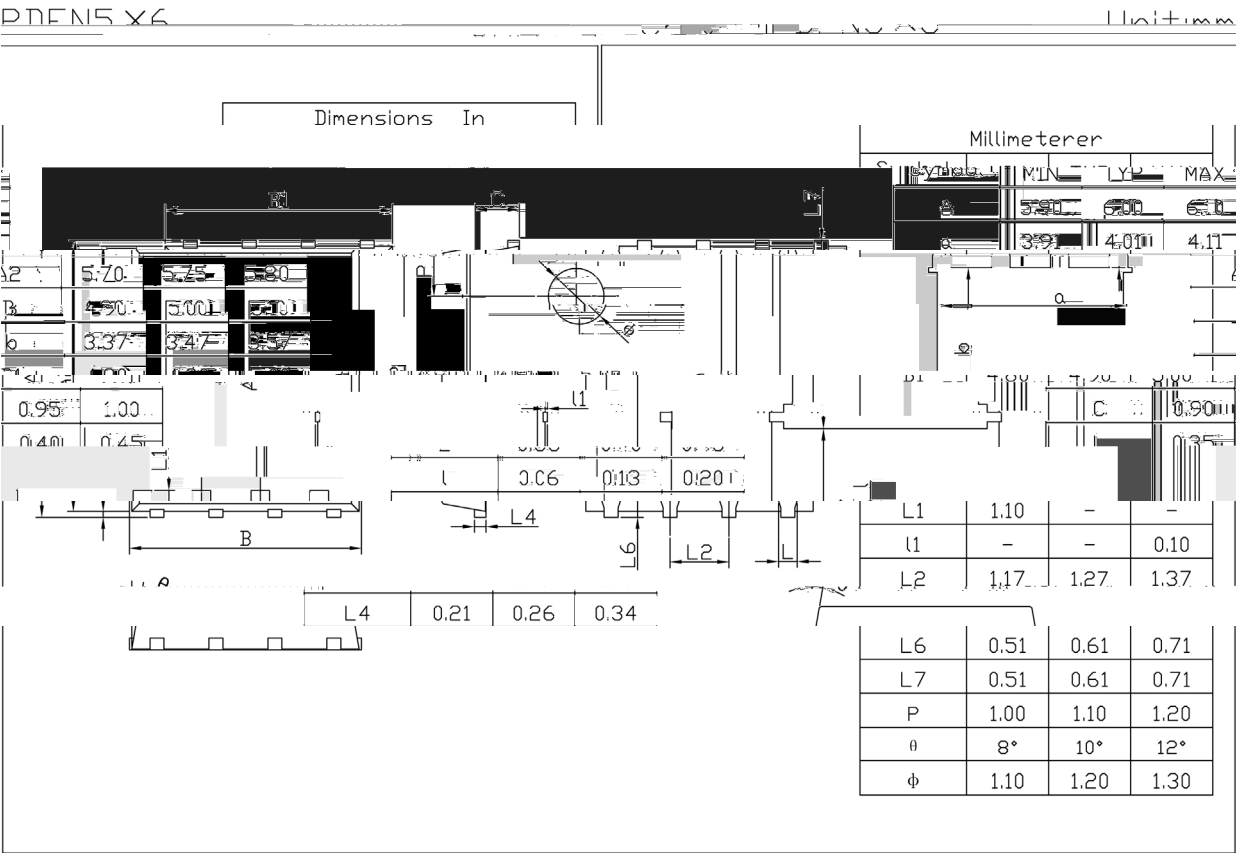

Rev.00 201812

/ Marking Instructions

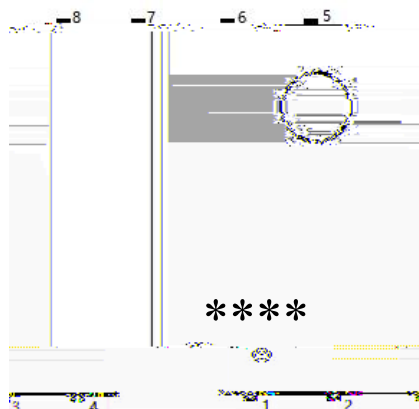

BR

Q
