

$\leq \Omega$



$\leq \Omega$

Ω

Ω

DEF0T434

EPV

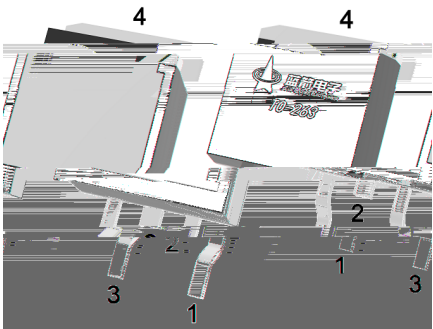



			±	
	≤	θ		
		θ		



		μ				
						μ
					±	
		μ				
						Ω
						Ω



		Ω Ω				

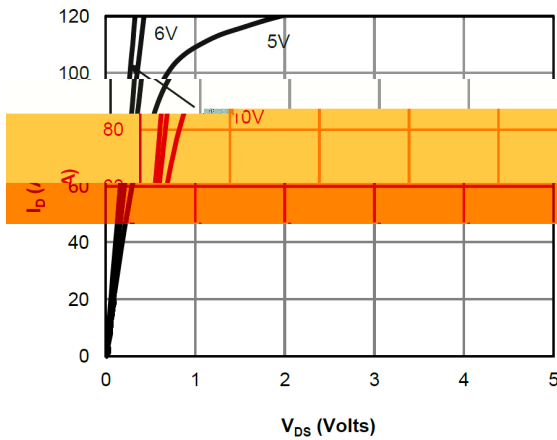


Figure 1: On-Region Characteristics

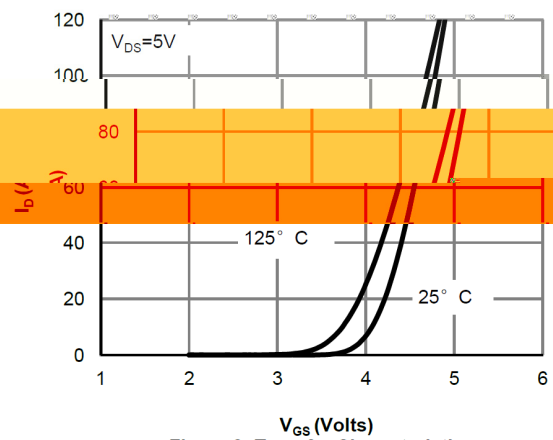


Figure 2: Transfer Characteristics

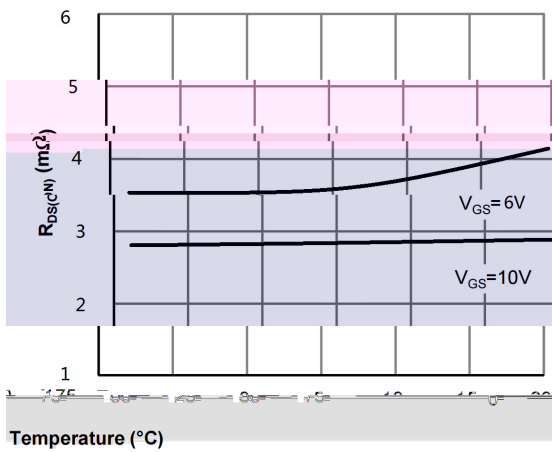


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

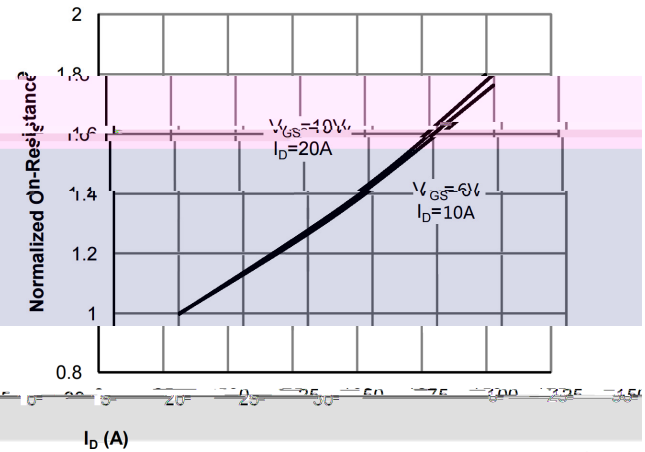


Figure 4: Normalized On-Resistance vs. Drain Current and Gate Voltage

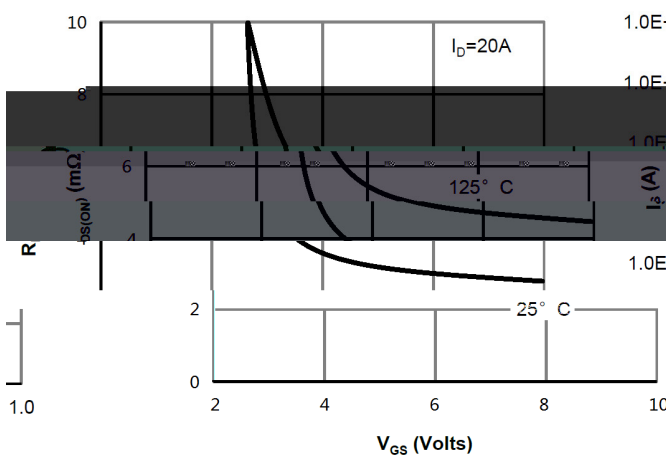


Figure 5: On-Resistance vs. Gate-Source Voltage

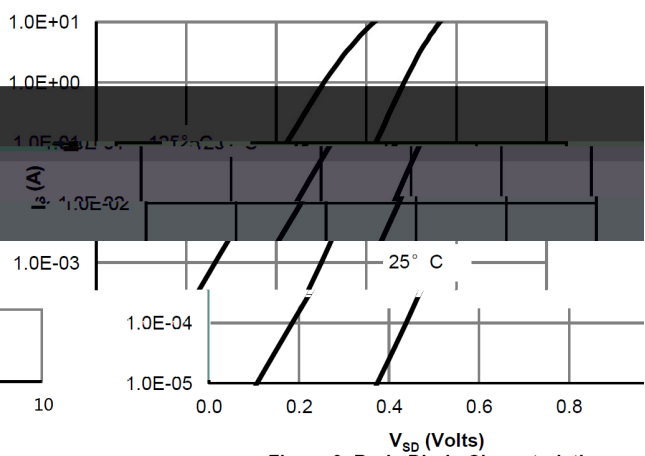


Figure 6: Body Diode Characteristics

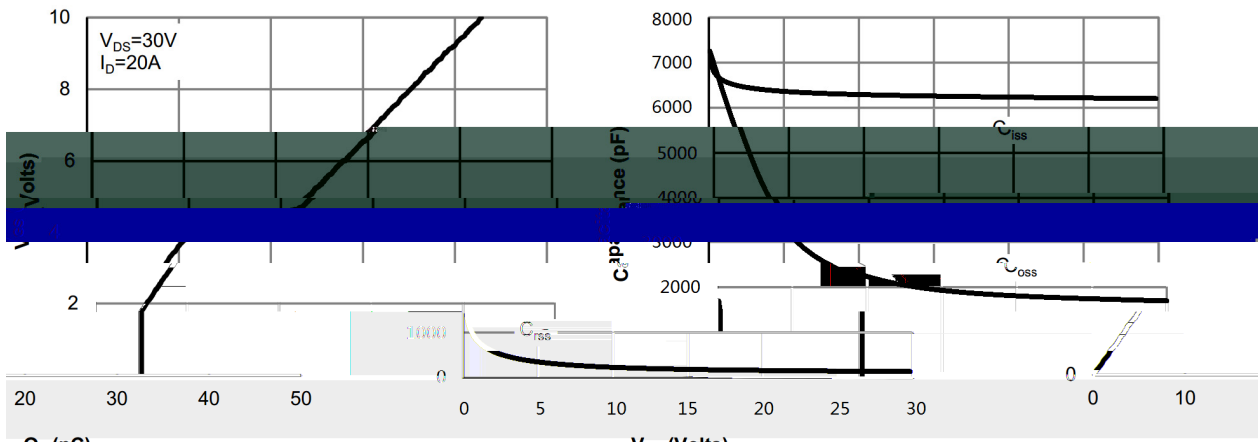


Figure 7: Gate-Charge Characteristics

Figure 8: Capacitance Characteristics

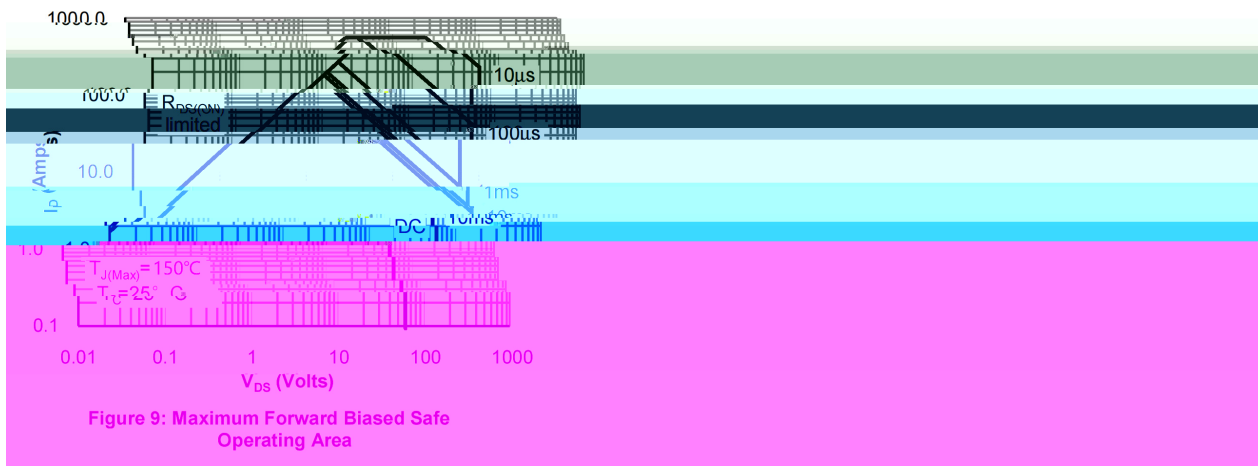


Figure 9: Maximum Forward Biased Safe Operating Area


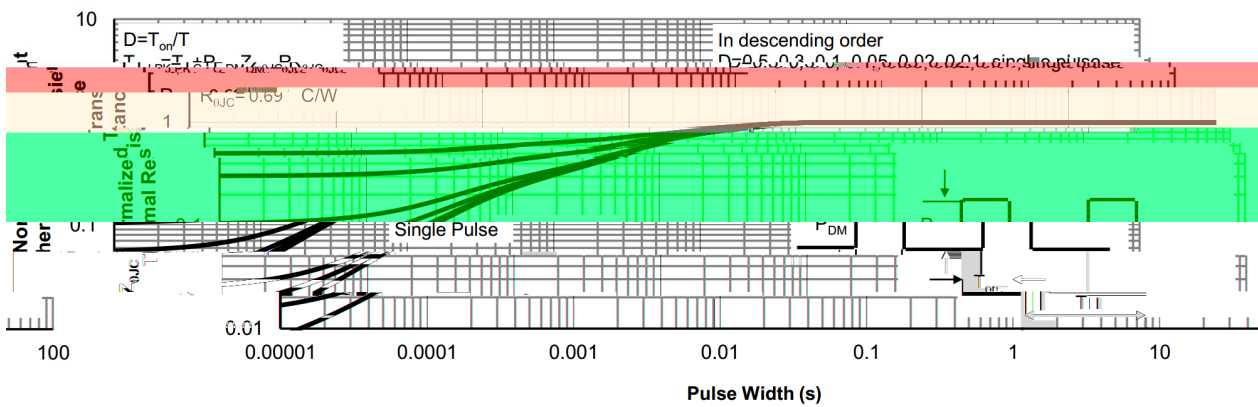



Figure 10: Normalized Maximum Transient Thermal Impedance

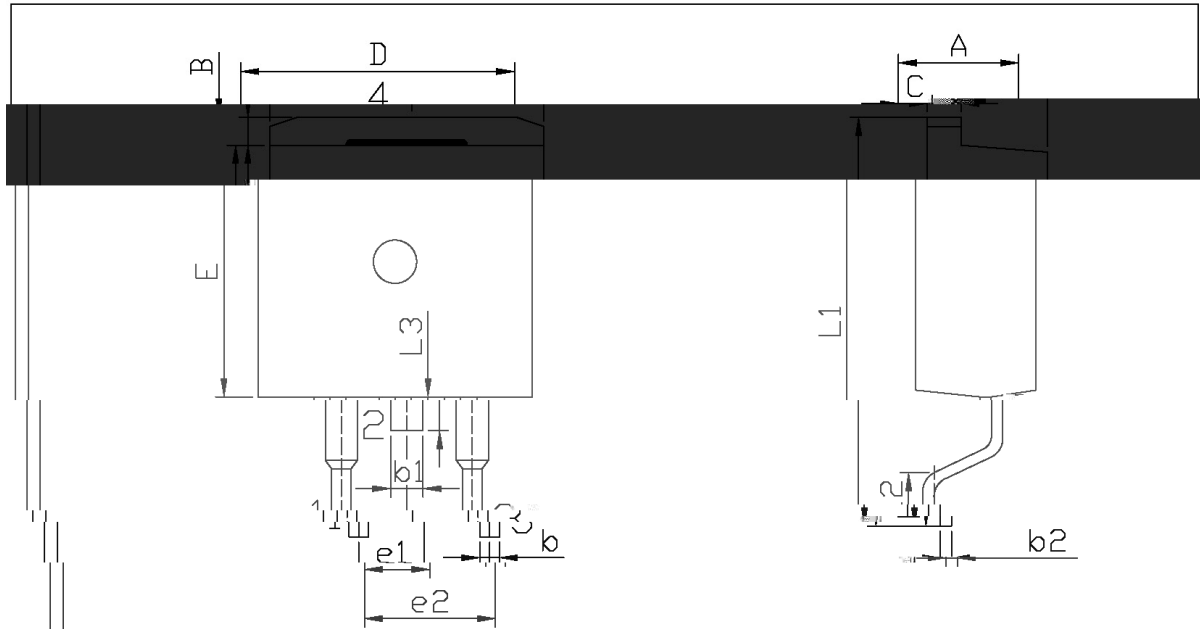

单位: mm


Dimensions In Millimeters			Dimensions In Millimeter		
Symbol	Min	Max	Symbol	Min	Max
A	4.30	4.70	E	9.00	9.40
B	1.00	1.40	L1	9.00	9.40
C	0.50	0.75	L3	0.50	0.75
D	4.00	4.40	b1	0.50	0.75
E	9.00	9.40	b2	0.50	0.75
L1	9.00	9.40	e1	0.50	0.75
L3	0.50	0.75	e2	0.50	0.75
b1	0.50	0.75			
b2	0.50	0.75			
e1	0.50	0.75			
e2	0.50	0.75			

263

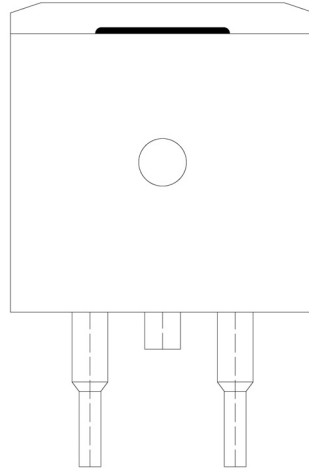

EU

363Q39VH

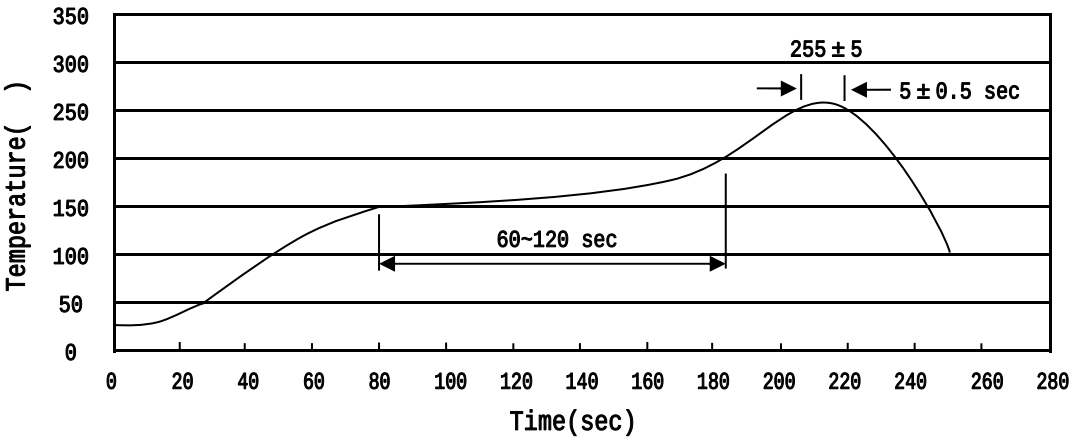

±

±

±

±

±

±

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box