
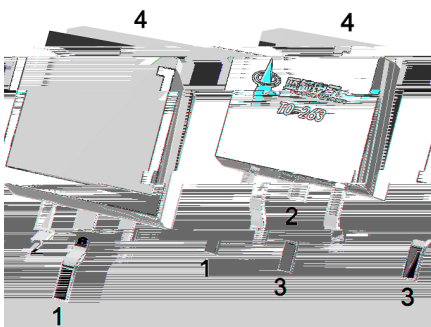


$$\begin{matrix} \leq & \Omega & \Omega \\ \leq & \Omega & \Omega \end{matrix}$$

LED



			±	
		θ		
		θ		

		μ				
						μ
					±	
		μ				
						Ω
						Ω



		Ω Ω				

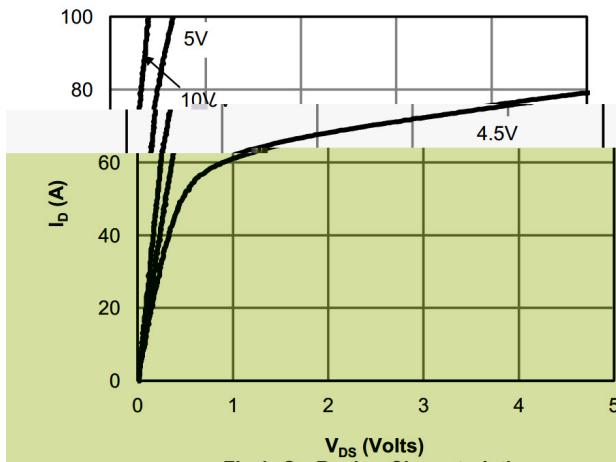


Figure 1: Drain Current Characteristics

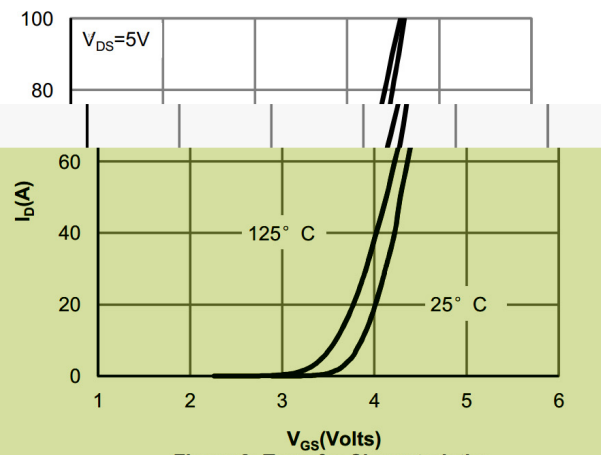


Figure 2: Transfer Characteristics

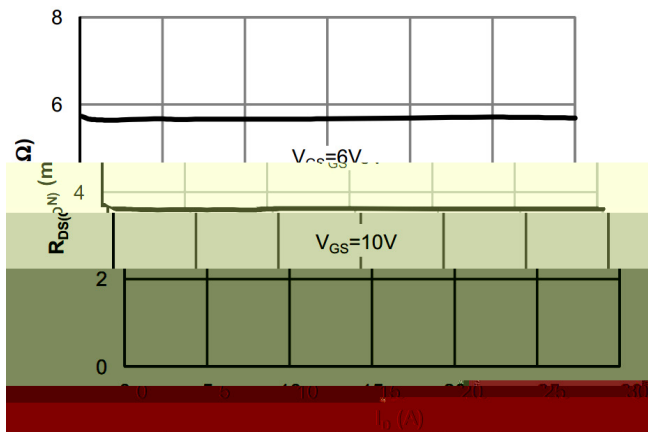


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

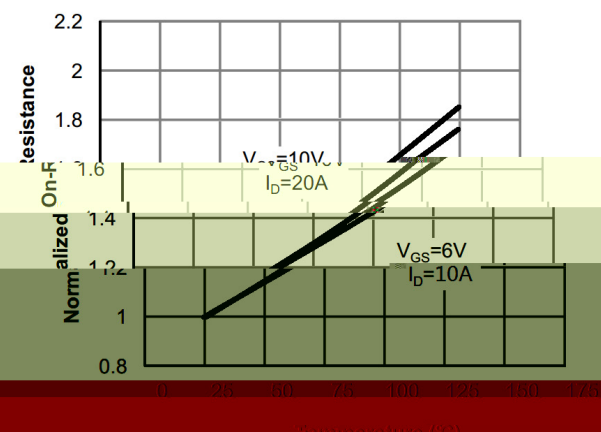


Figure 4: On-Resistance vs. Junction Temperature

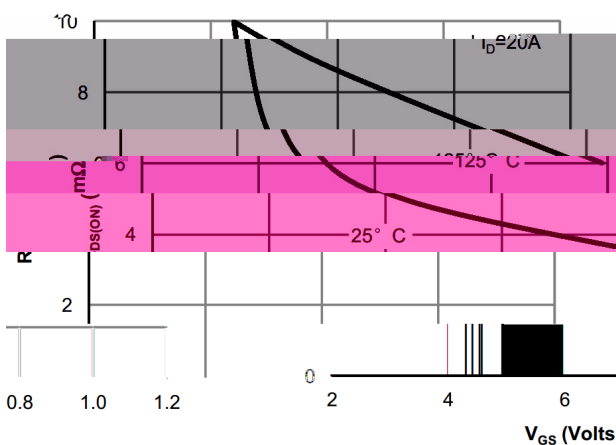


Figure 5: On-Resistance vs. Gate-Source Voltage






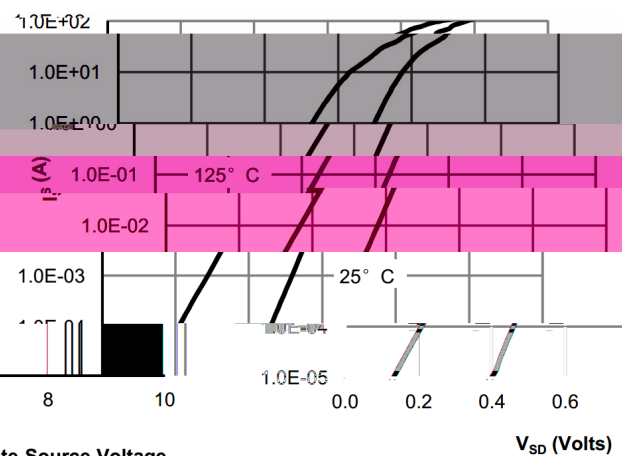


Figure 6: Body-Diode Characteristics

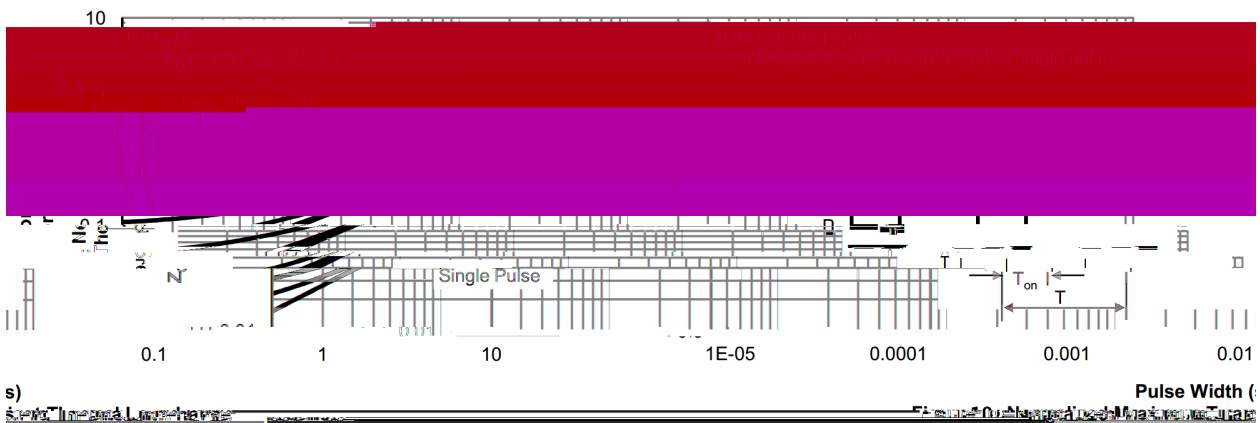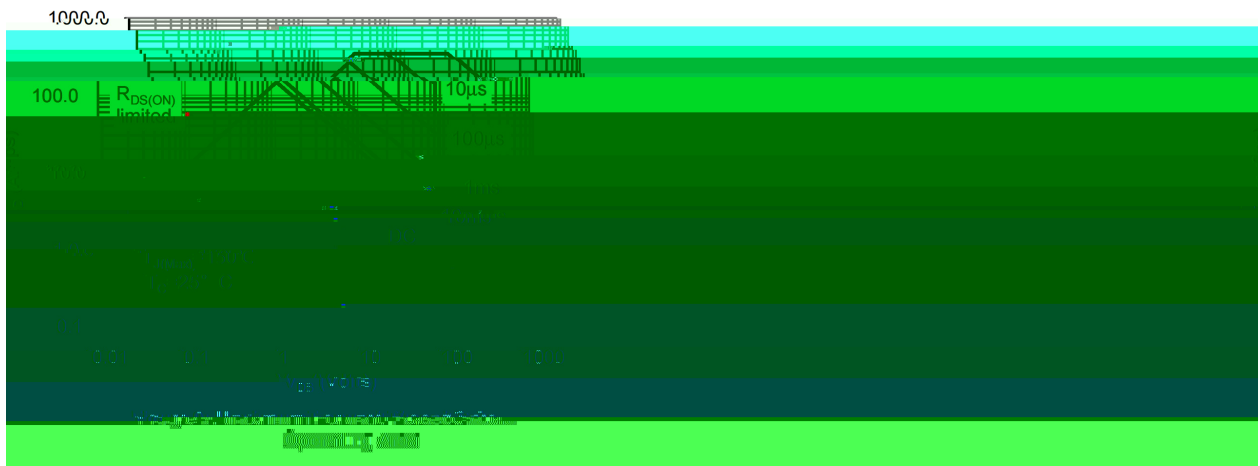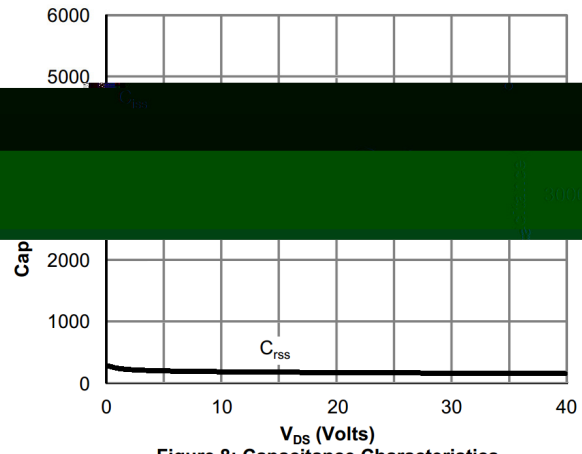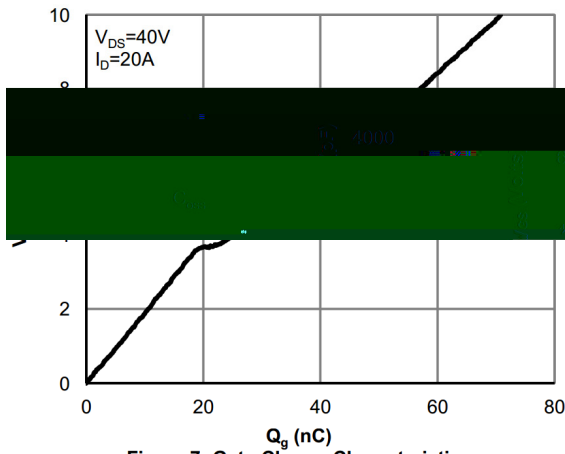


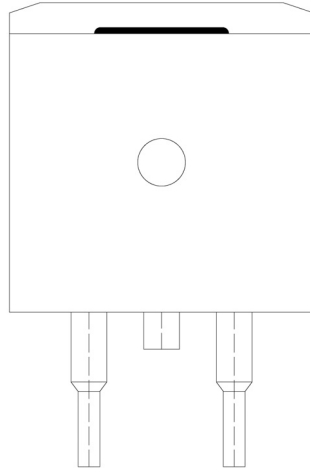

BR

045N08SH

Temperature Profile for IR Reflow Soldering(Pb-Free)

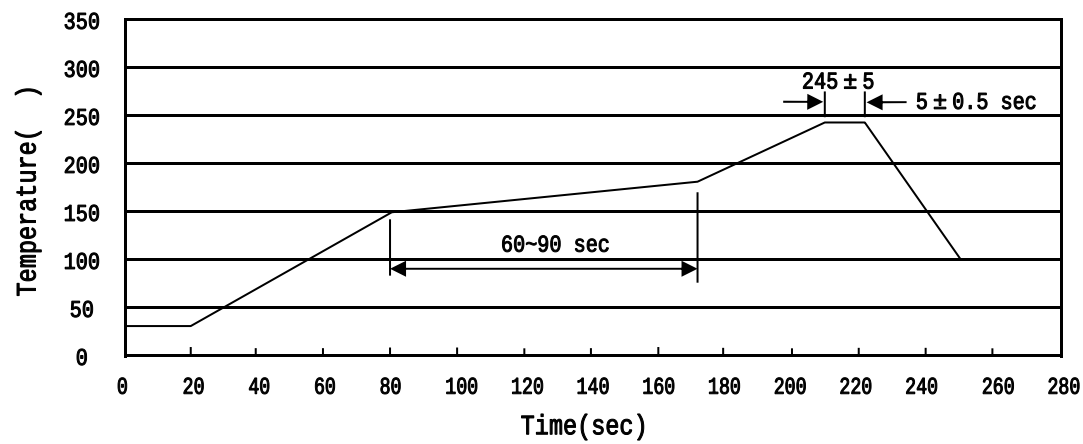

±

±

±

±

±

±

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box