



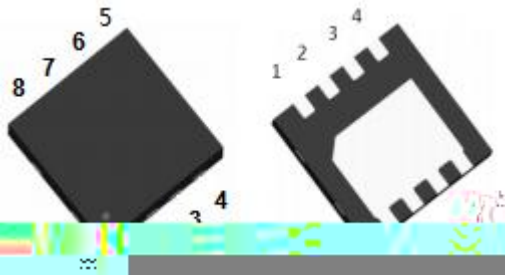

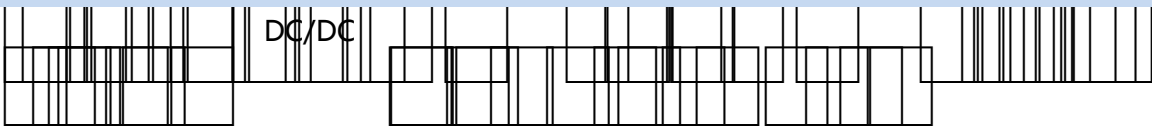


A	2020.05.19	All	BRD20N03 AON7430		
B	2021-6-9	1			
C	2022-3-14	2	ID/PD/ , BRCs120N03YB		

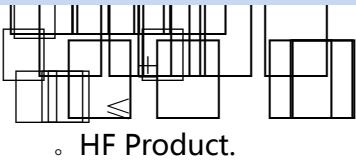




出脚	定义
Pin1	S
Pin2	S
Pin3	S
Pin4	G
Pin5	D
Pin6	D
Pin7	D
Pin8	D



[illegible]



参数	符号	测试条件	最小值	典型值	最大值	单位



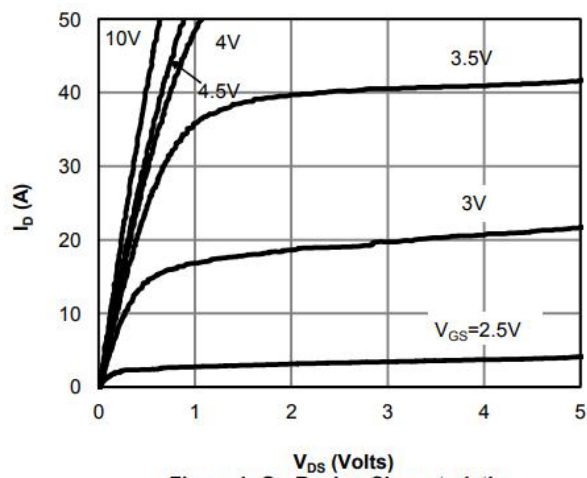



Figure 1: On-Region Characteristics












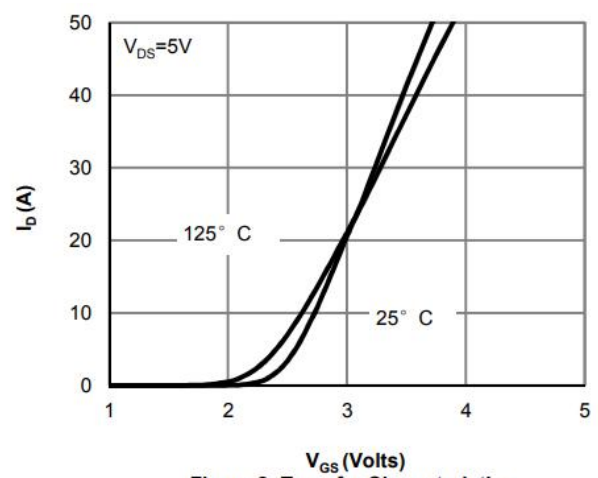



Figure 2: Transfer Characteristics

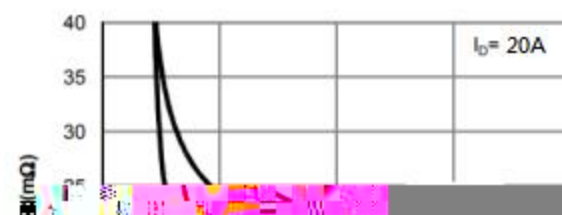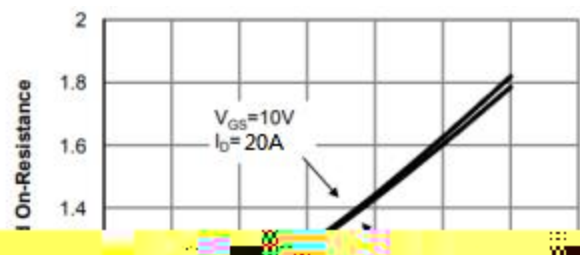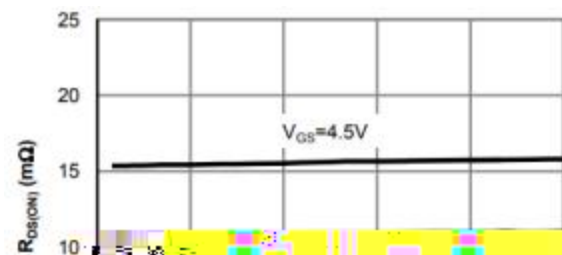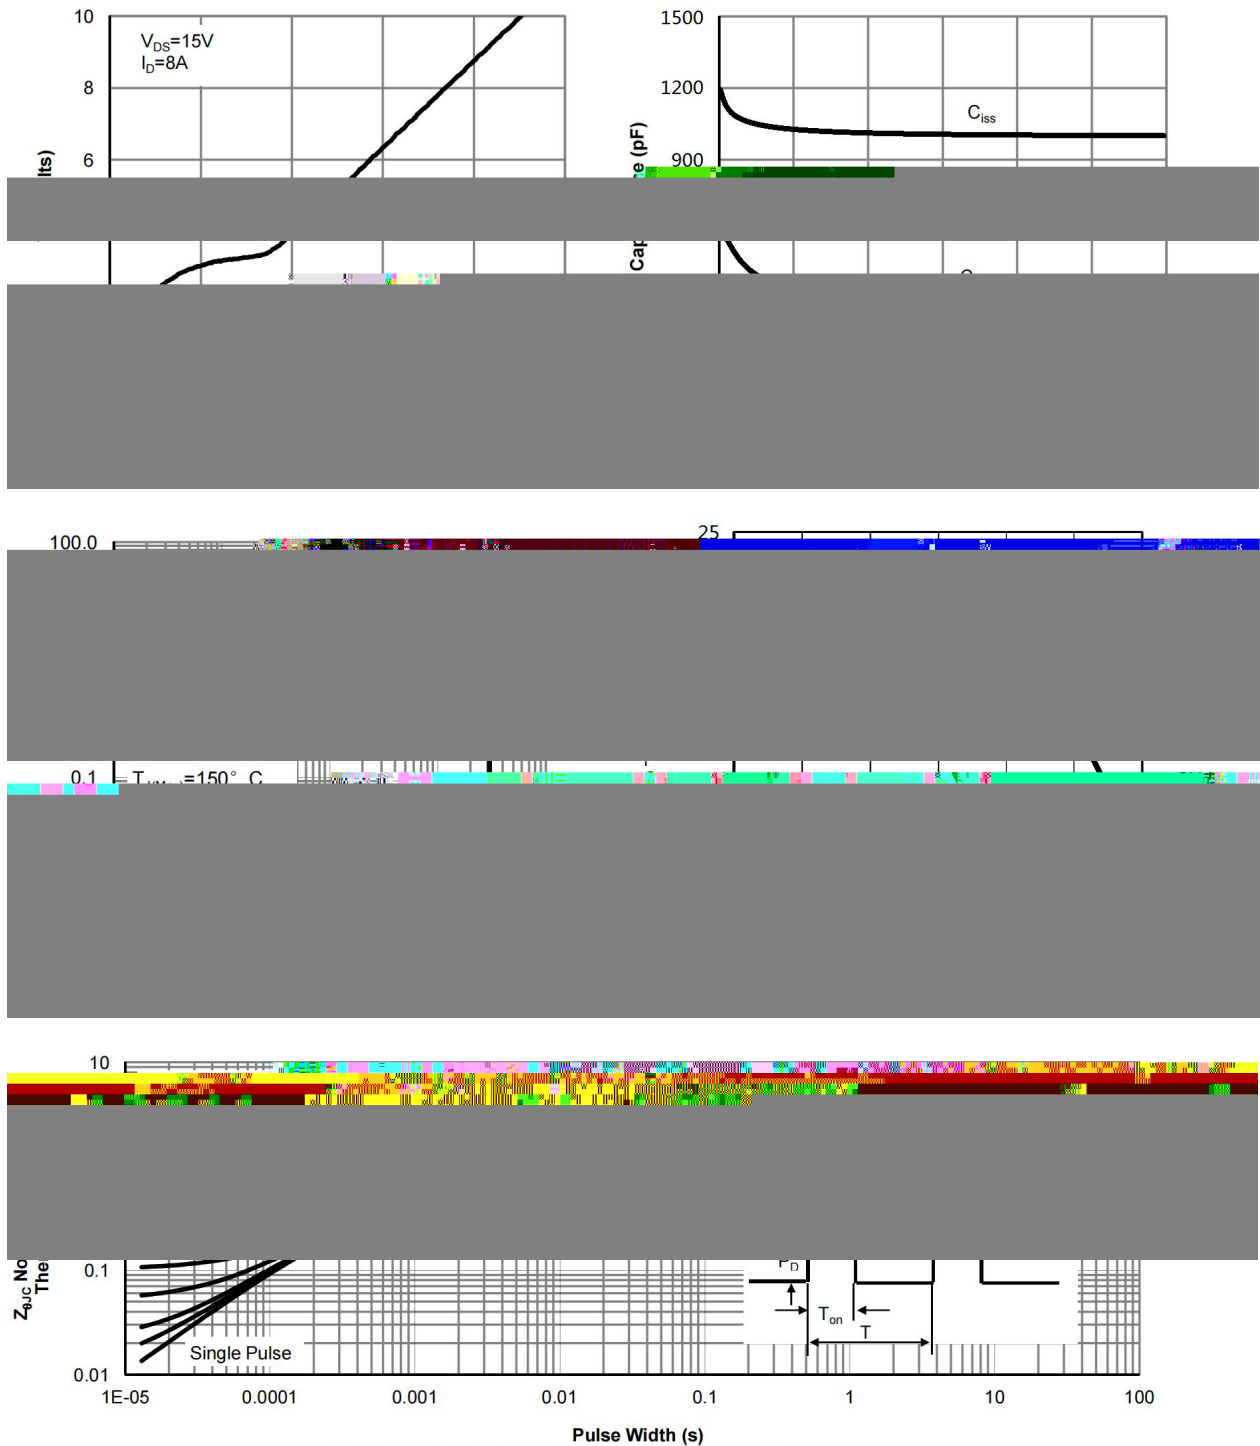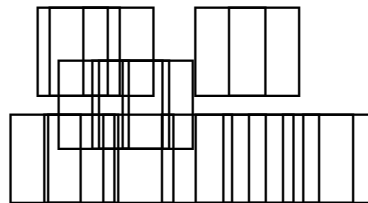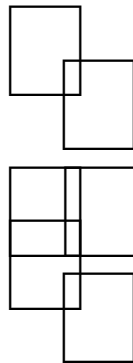



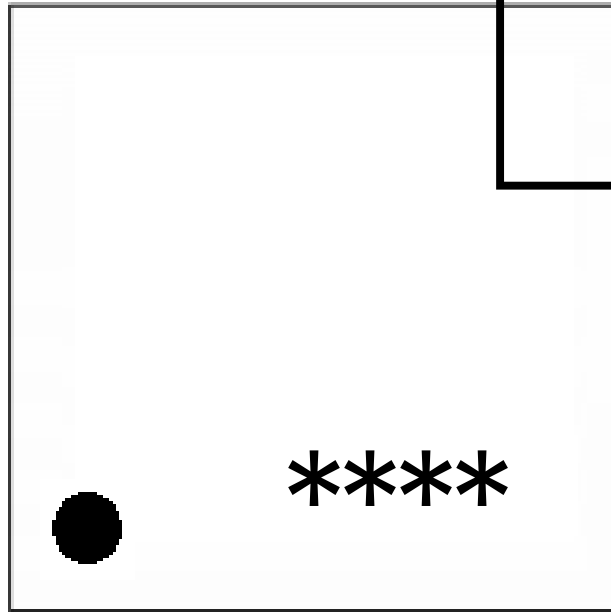





Temperature Profile for IR Reflow Soldering(Pb-Free)

