


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning

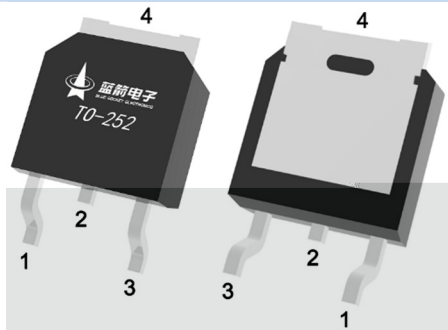

/ Marking


/ Absolute Maximum Ratings(Ta=25)

	θ		/W
	θ		/W


/ Electrical Characteristics(Ta=25)

		μ				
						μ
						μ
		μ				
						Ω
		Ω				

/ Electrical Characteristic Curve

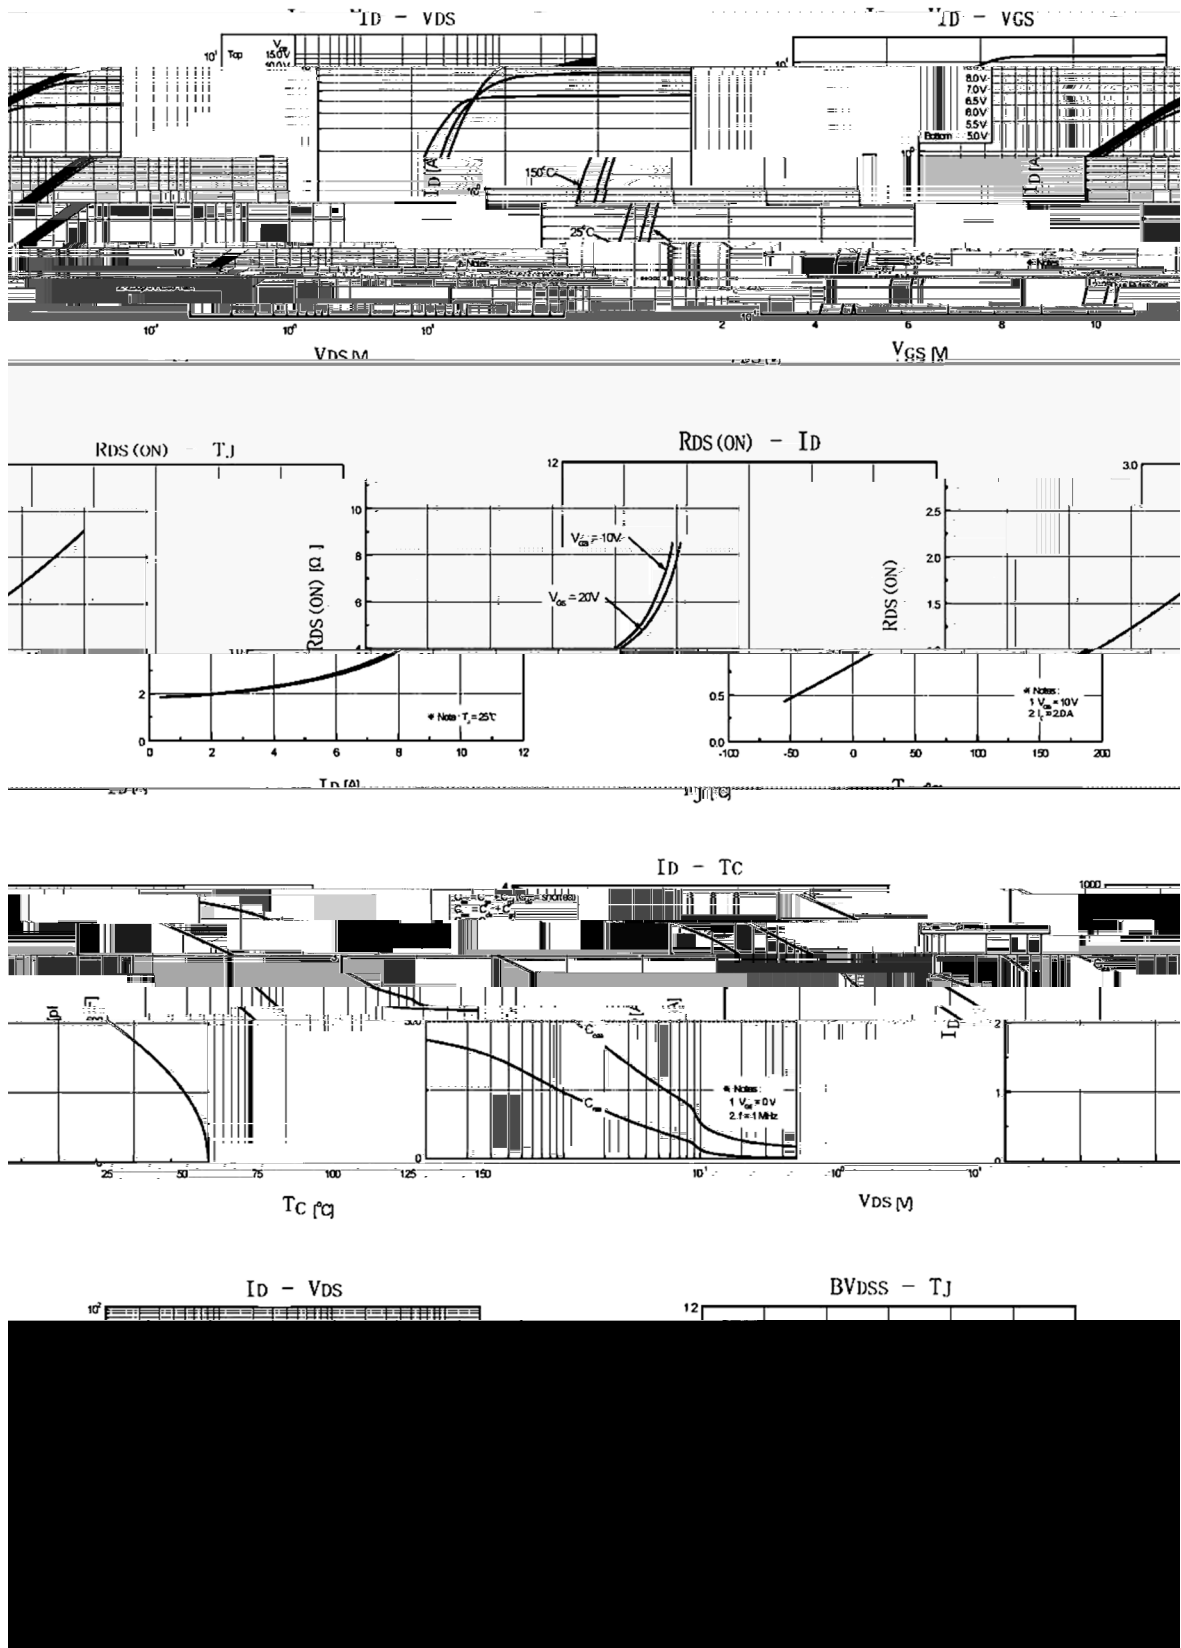


/ Package Dimensions

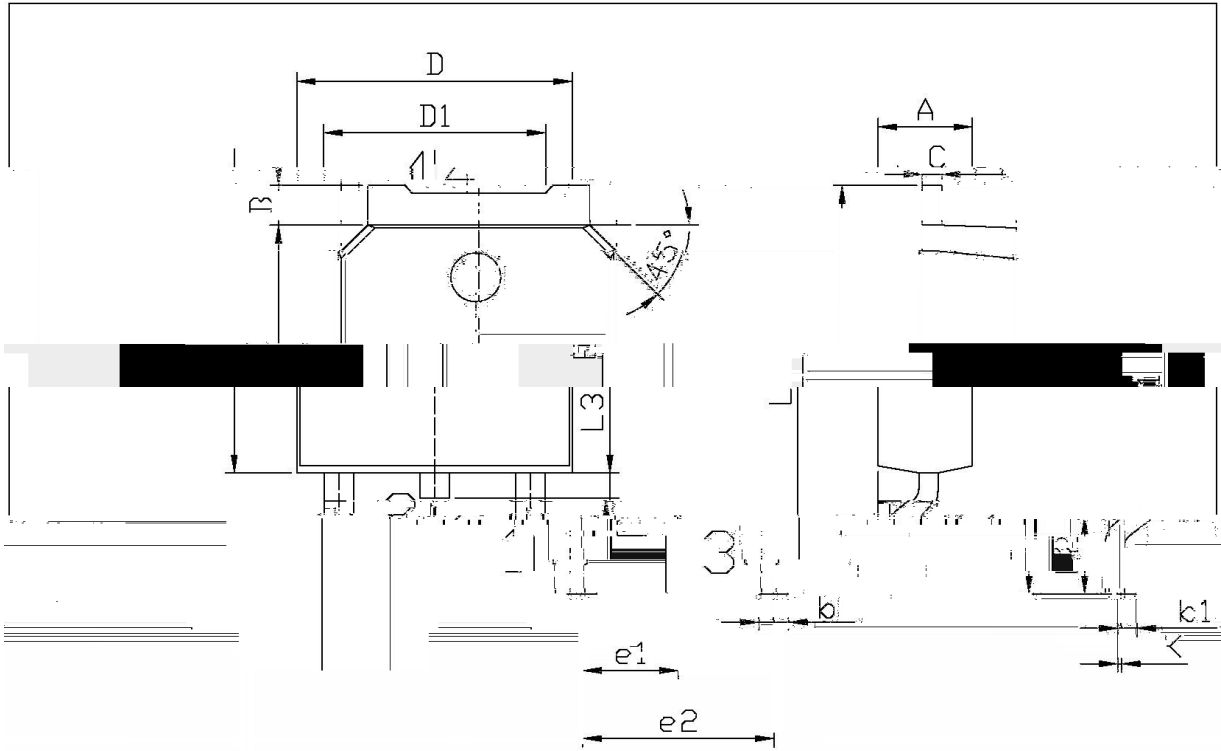

单位: mm


Symbol		Dimensions In Millimeters		Symbol		Dimensions In Millimeters	
		Min	Max			Min	Max
5.95	6.25			A	2.20	2.40	
0.95	1.25			e1	2.24	2.34	
0.70	0.90			e2	4.43	4.73	
0.45	0.55			L1	9.85	10.35	b1
0.60	0.75			L2	1.70	2.00	
0.60	0.90			L3	6.45	6.75	
0.00	0.10			D1	5.10	5.50	

/ Marking Instructions

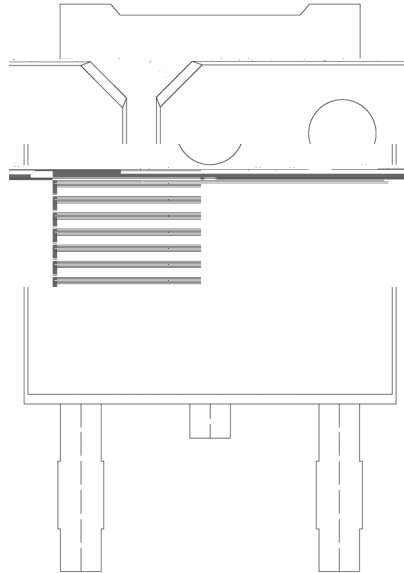

4N65

() /

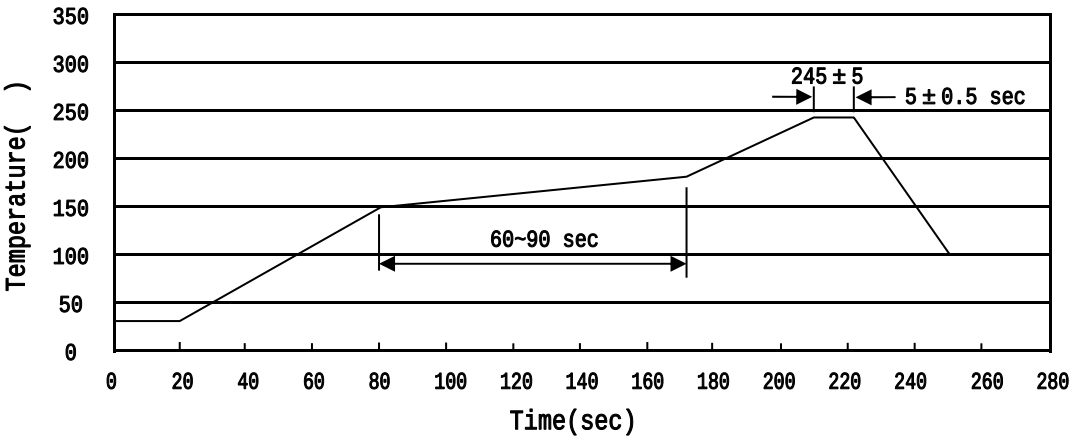

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box

/ Notices