
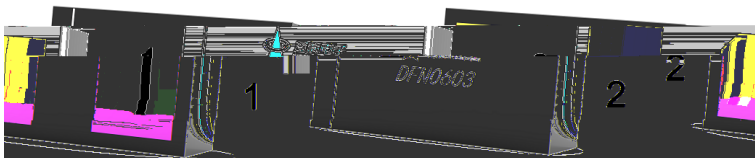



DFN0603 ESD

DFN0603 Plastic Package 1-Line,Bi-directional , ESD Protection Diode.

- ◆ Stand-off voltage: $\pm 5V$ Max.
 - ◆ Transient protection for each line according to
 - IEC61000-4-2(ESD): $\pm 30kV$ (contact)
 - IEC61000-4-4 (EFT): 80A (5/50ns)
 - IEC61000-4-5(surge): 20A (8/20 s)
 - ◆ Ultra-low capacitance: $C_J = 35pF$ typ.
 - ◆ Low leakage current:
 - ◆ Low clamping voltage: $V_{CL} = 7.8V$ typ. @ $I_{PP} = 16A$ (TLP)
 - ◆ Solid-state silicon technology
 - ◆ HF Product
-
- ◆ Battery Line Protection
 - ◆ Audio Line Protection
 - ◆ Microphone Line Protection
 - ◆ GPIO Protection



Parameter	Symbol	Rating	Unit
Peak Pulse Power($t_p = 8/20 \text{ s}$)	P_{PK}	230	W
Peak Pulse Current($t_p = 8/20 \text{ s}$)	I_{PP}	20	A
ESD according to IEC61000-4-2 air discharge	V_{ESD}	± 30	KV
ESD according to IEC61000-4-2 contact discharge		± 30	
Junction temperature	T_J	125	
Operating temperature	T_{OP}	-40~85	
Lead temperature	T_L	260	
Storage Temperature	T_{STG}	-55~+150	

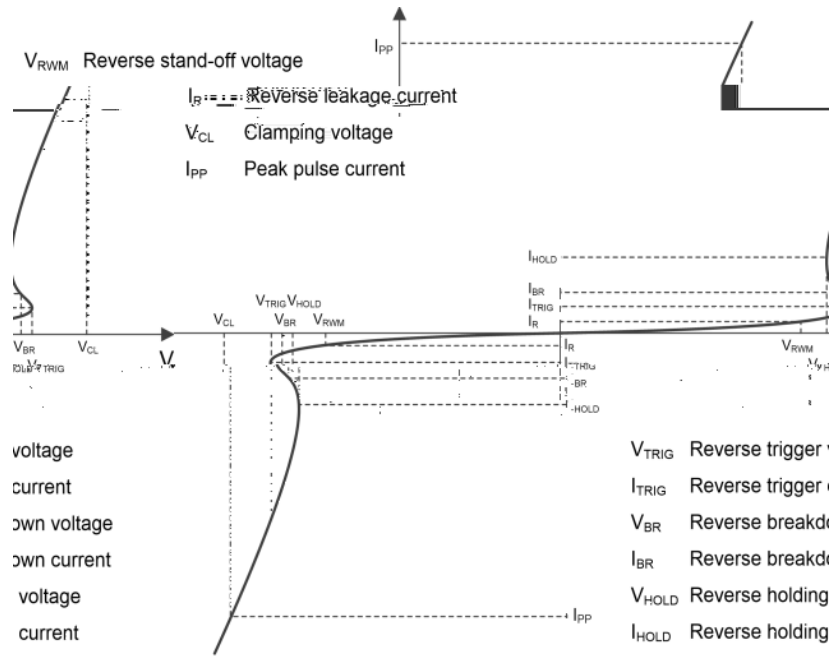


Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Reverse maximum working voltage	V_{RWM}				± 5.0	V
Reverse leakage current	I_R	$V_{RWM} = 5.0V$			100	nA
Reverse breakdown voltage	V_{BR}	$I_{BR}=1mA$	5.1			V
Reverse holding voltage	V_{HOLD}	$I_{HOLD}=50mA$	5.1			V
Clamping voltage ¹⁾	V_{CL}	$I_{PP}=16A \quad t_p=100ns$		7.8		V
Dynamic resistance ¹⁾	R_{DYN}			0.1		
Clamping voltage ²⁾	V_{CL}	$V_{ESD}= 8kV$		8.0		V
Clamping voltage ³⁾	V_{CL}	$I_{PP} = 1A \quad t_p = 8/20 \text{ s}$		6.2	8	V
		$I_{PP} = 20A \quad t_p = 8/20 \text{ s}$		9.5	11.5	V
Junction Capacitance	C_J	$V_R = 0V \quad f = 1MHz$		35	45	pF
	C_J	$V_R = 5V \quad f = 1MHz$		25	35	pF

Notes:

1) TLP parameter: $Z_0 = 50\Omega$, $t_p = 100ns$, $t_r = 2ns$, averaging window from 60ns to 80ns. R_{DYN} is calculated from 4A to 16A.


2) Contact discharge mode, according to IEC61000-4-2.

3) Non-repetitive current pulse, according to IEC61000-4-5.

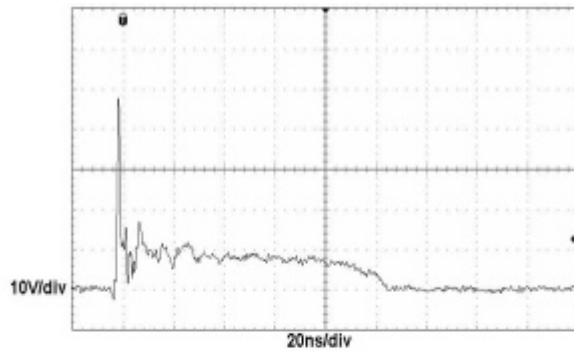


ESD clamping

(+8kV contact discharge per IEC61000-4-2)

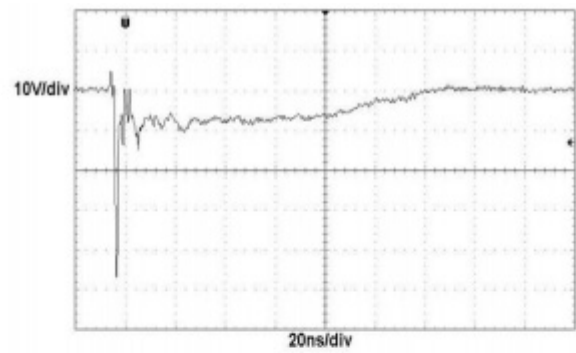


ESD clamping

(-8kV contact discharge per IEC61000-4-2)

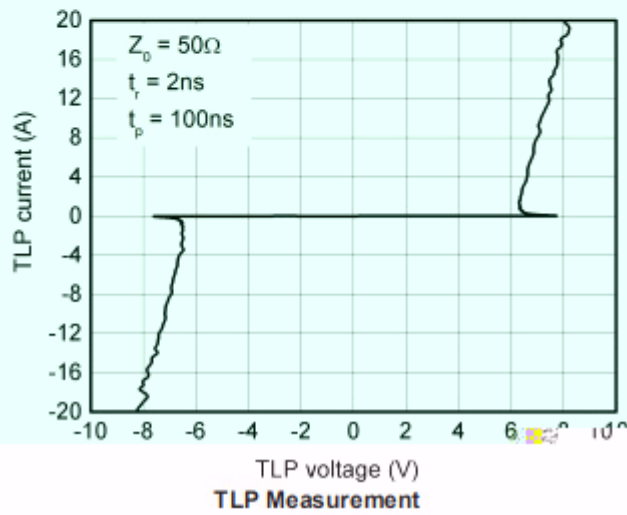


DFN0603

Unit:mm

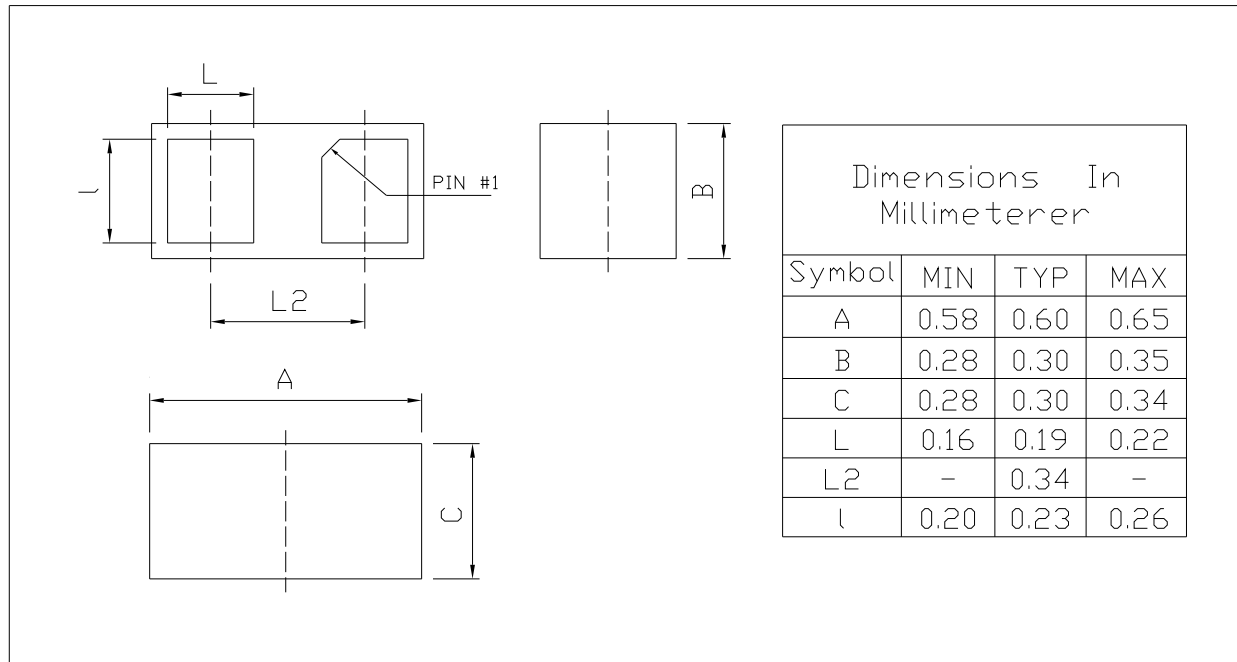


Rev.02 202102

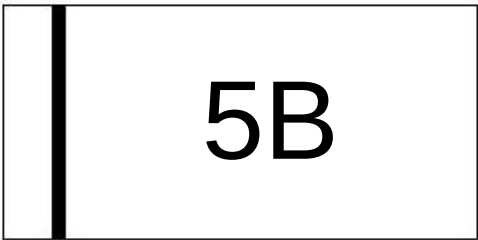

5B

Note

5B Product Type Code

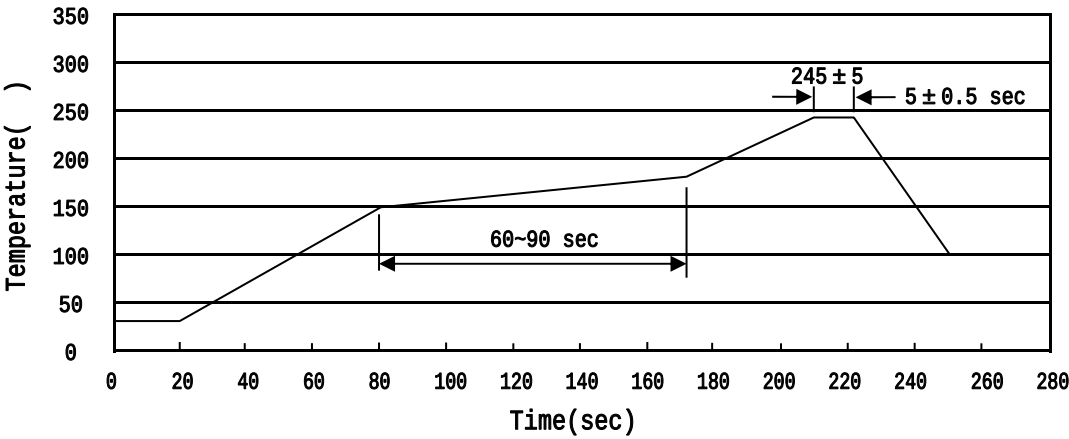

Note:

- 1

150 180

60 90sec;

1.Preheating:150~180 , Time:60~90sec.
- 2

245±5

5±0.5sec;

2.Peak Temp.:245±5 , Duration:5±0.5sec.
- 3

2 10 /sec.

3. Cooling Speed: 2~10 /sec.

260±5

10±1 sec.

Temp.:260±5

Time:10±1 sec

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
DFN0603	15,000	10	150,000	4	600,000	7 ×8	210×205×205	445×435×230