


/ Descriptions

700V

/ Features

/ Applications

/ Equivalent Circuit






/ Pinning







/ Marking

/ Electrical Characteristics(Ta=25)

/ Electrical Characteristic Curve

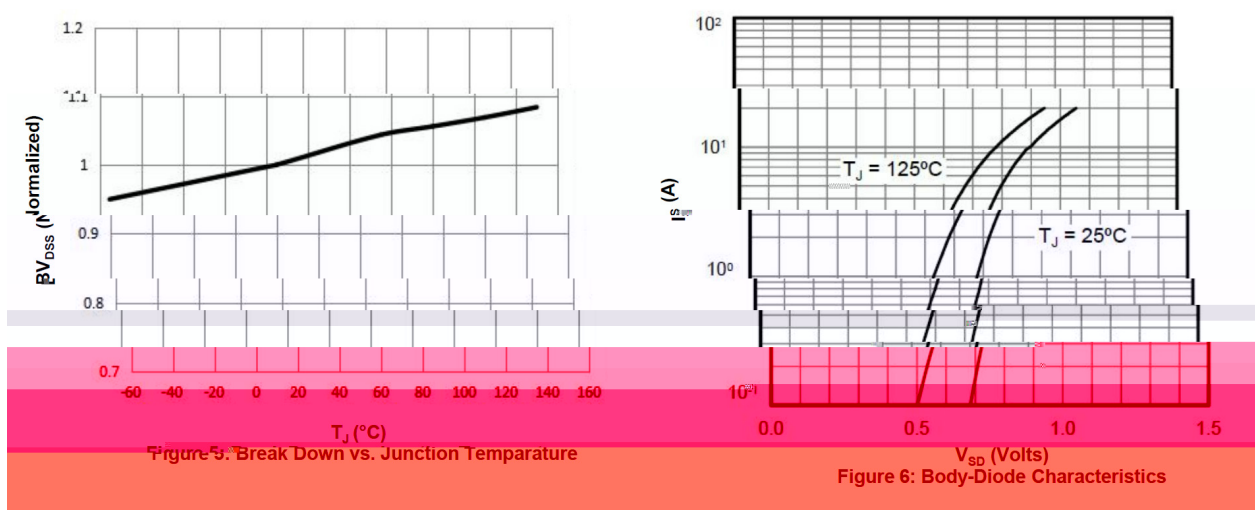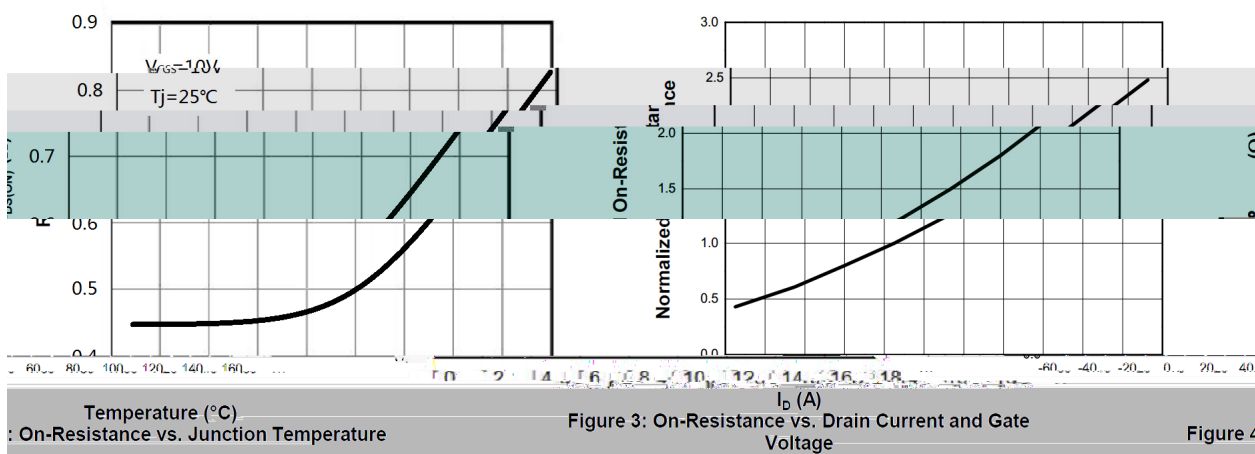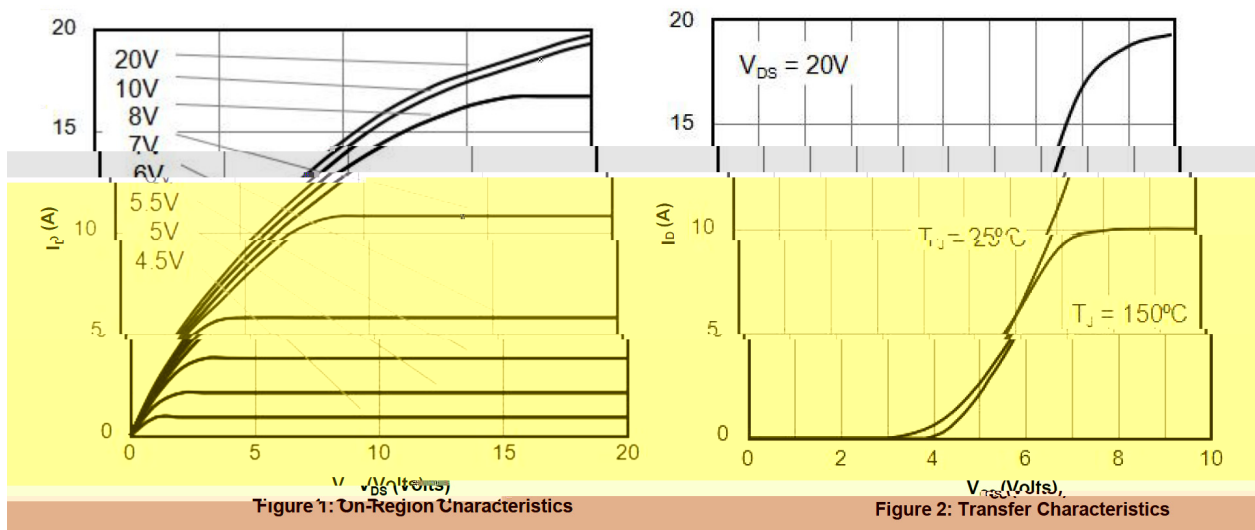


/ Electrical Characteristic Curve

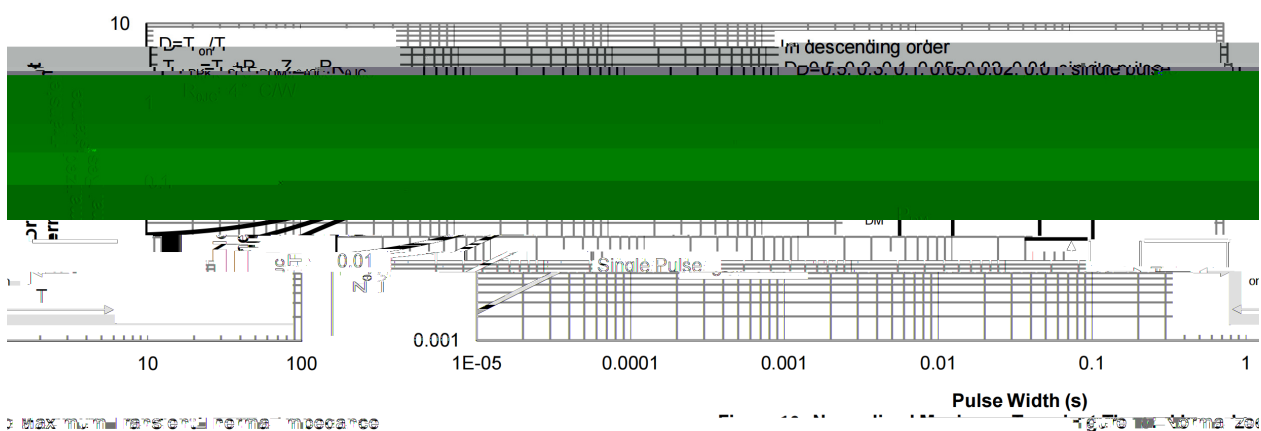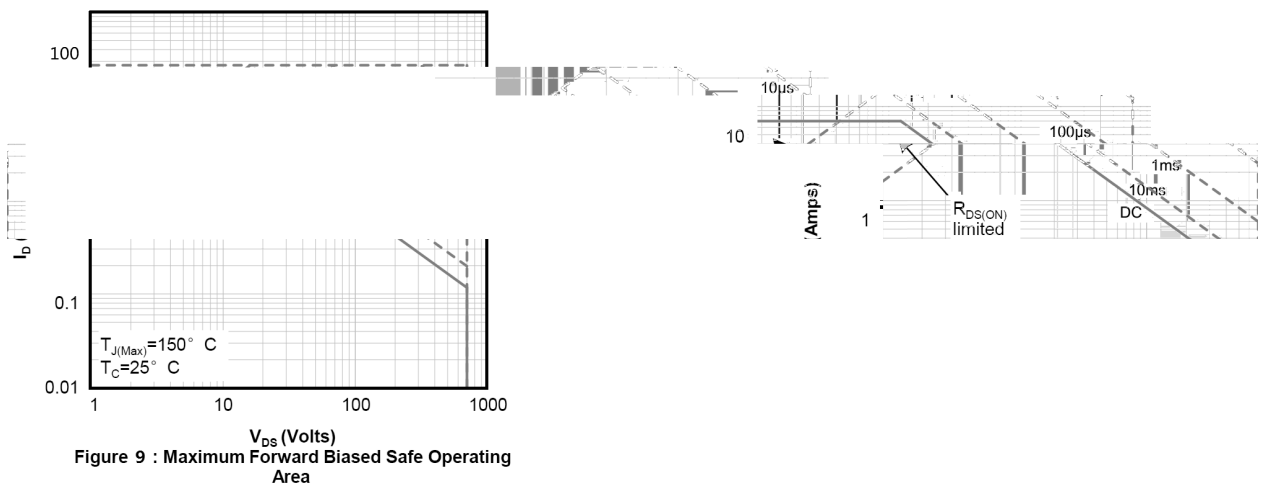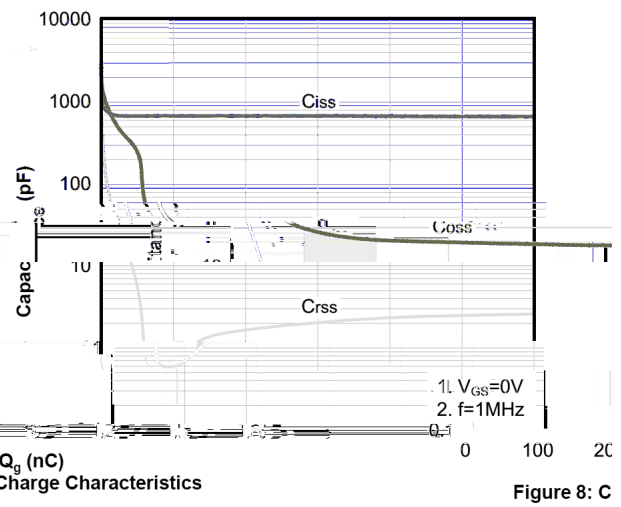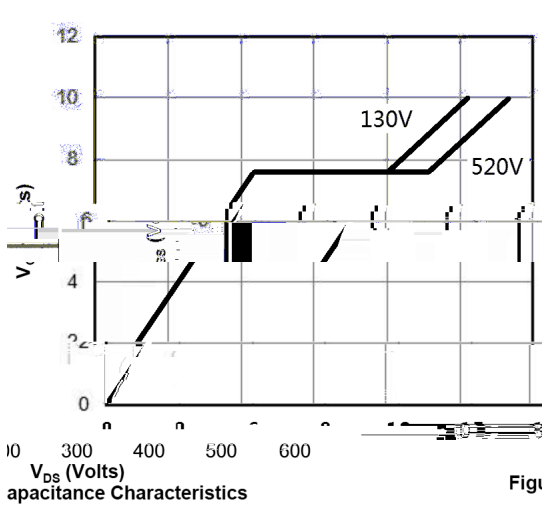

/ Package Dimensions

TTL-220FL

单位: mm

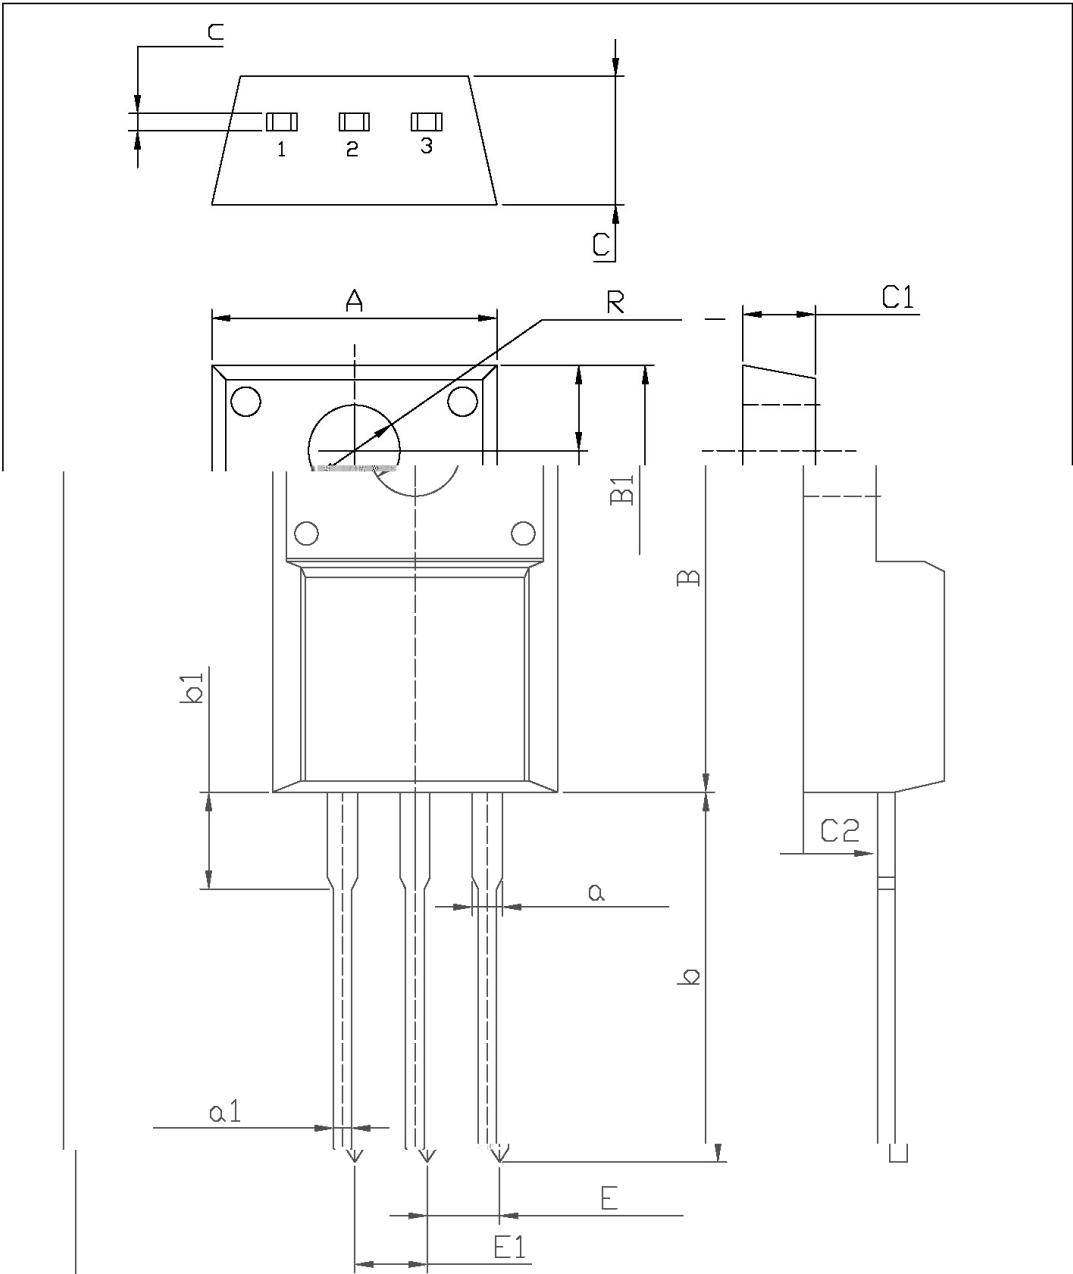


Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
C	4.5	4.9	b1	2.00	2.00
C	0.4	0.6	a	1.08	1.48
A	9.26	10.26	a1	0.70	0.70

/ Marking Instructions



() / Temperature Profile for Dip Soldering(Pb-Free)

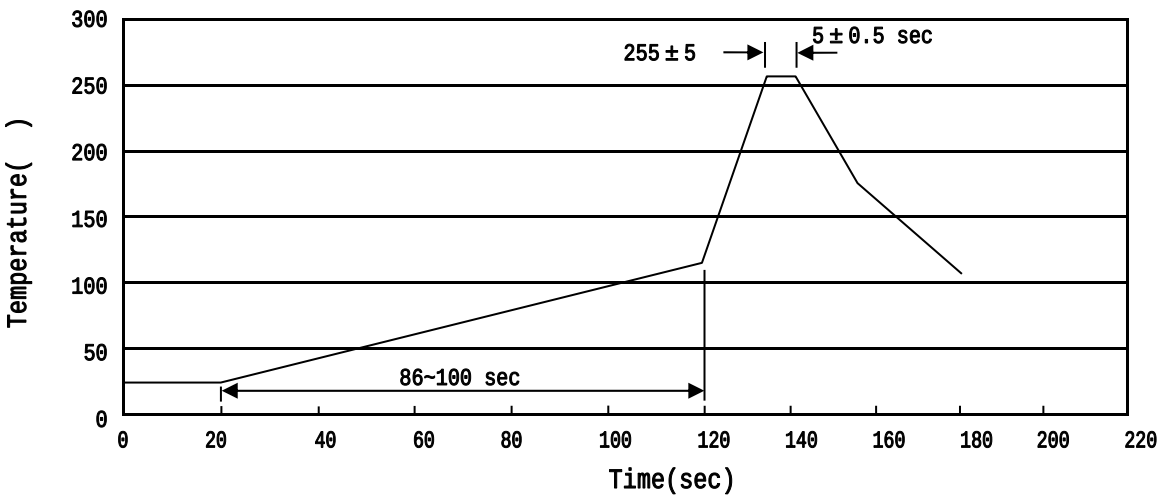

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

/ Notices