


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)





			℃
			℃
		~	℃

/ Electrical Characteristics(Ta=25)

		℃				
	()	℃				
		℃				


:

Electrical Characteristic Curve

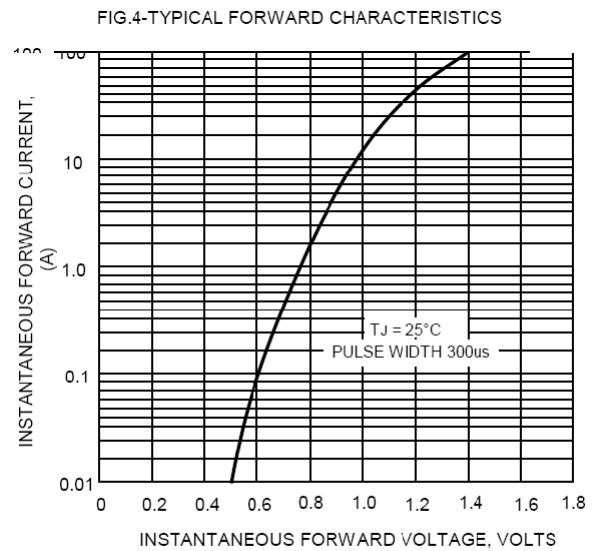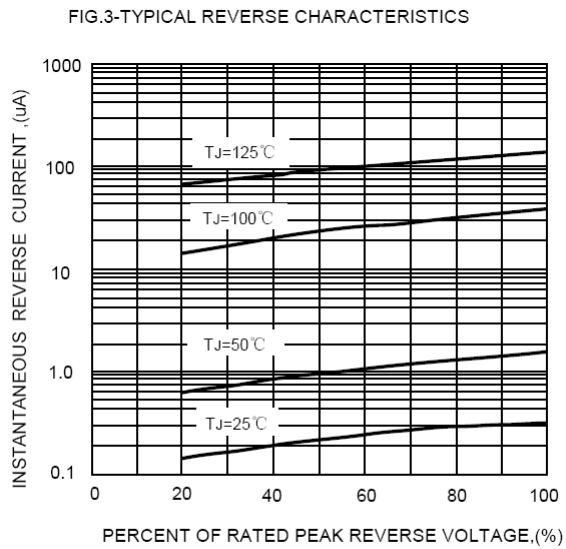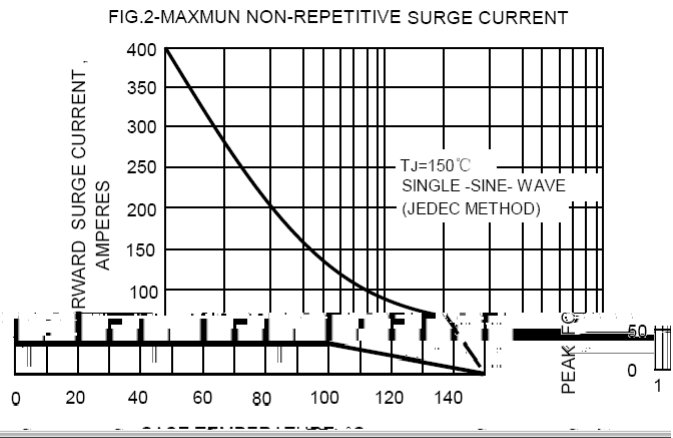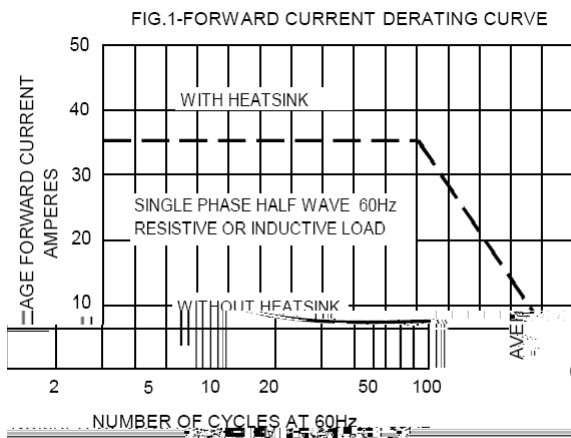


/ Package Dimensions

GBJ

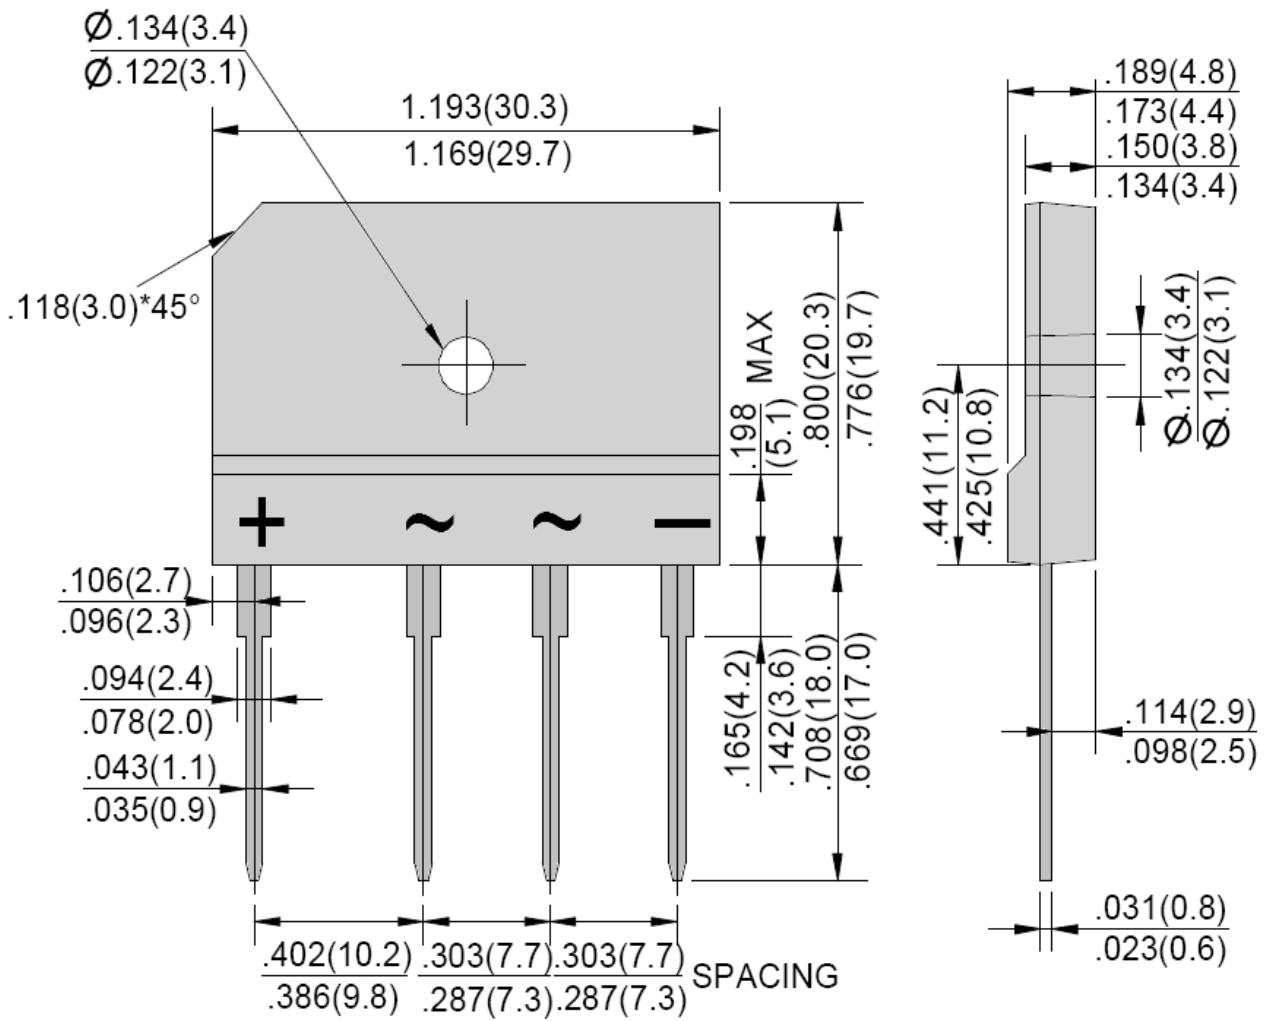

/ Marking Instructions

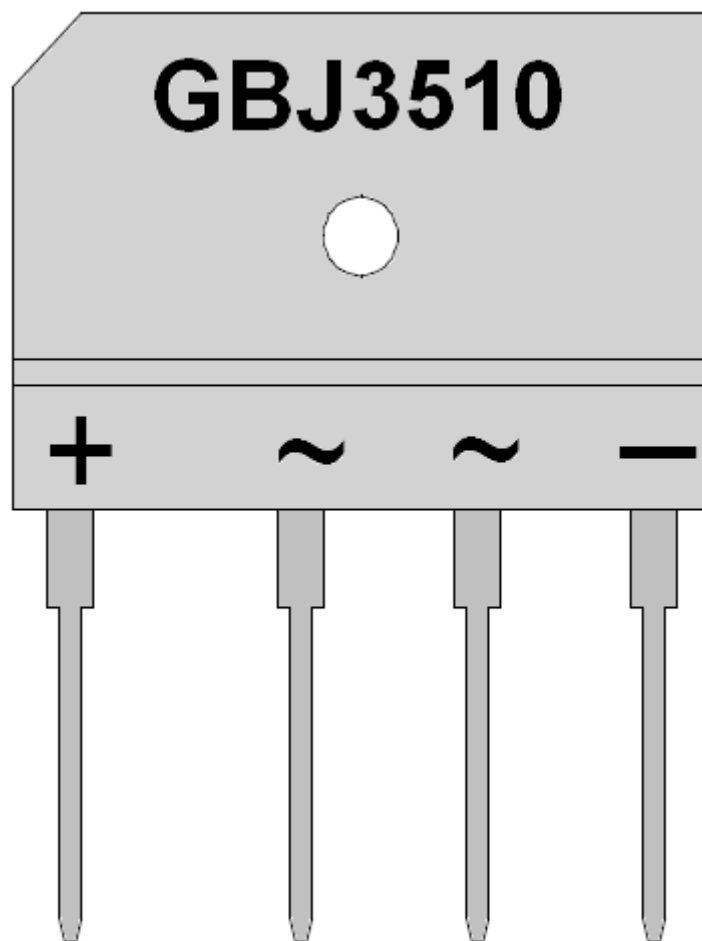

() / Temperature Profile for Dip Soldering(Pb-Free)



/ Resistance to Soldering Heat Test Conditions

℃

/ Packaging SPEC.

	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box
GBJ	-	-	250	8	2000	-	315×135×48	330×285×215

			Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /		Inner Box	Outer Box
GBJ	15	40	600	2	1200		500×190×105	525×210×245

/ Notices