

/ Descriptions


TO-92

/ Features

/ Applications

TTL

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)

	μ		μ
		μ	
		μ	
		μ	
		μ	

/ Electrical Characteristics(Ta=25)


/ Absolute Maximum Ratings(Ta=25)

						μ
		μ				μ
						μ
						μ


/ Package Dimensions

TO-92

Unit: mm

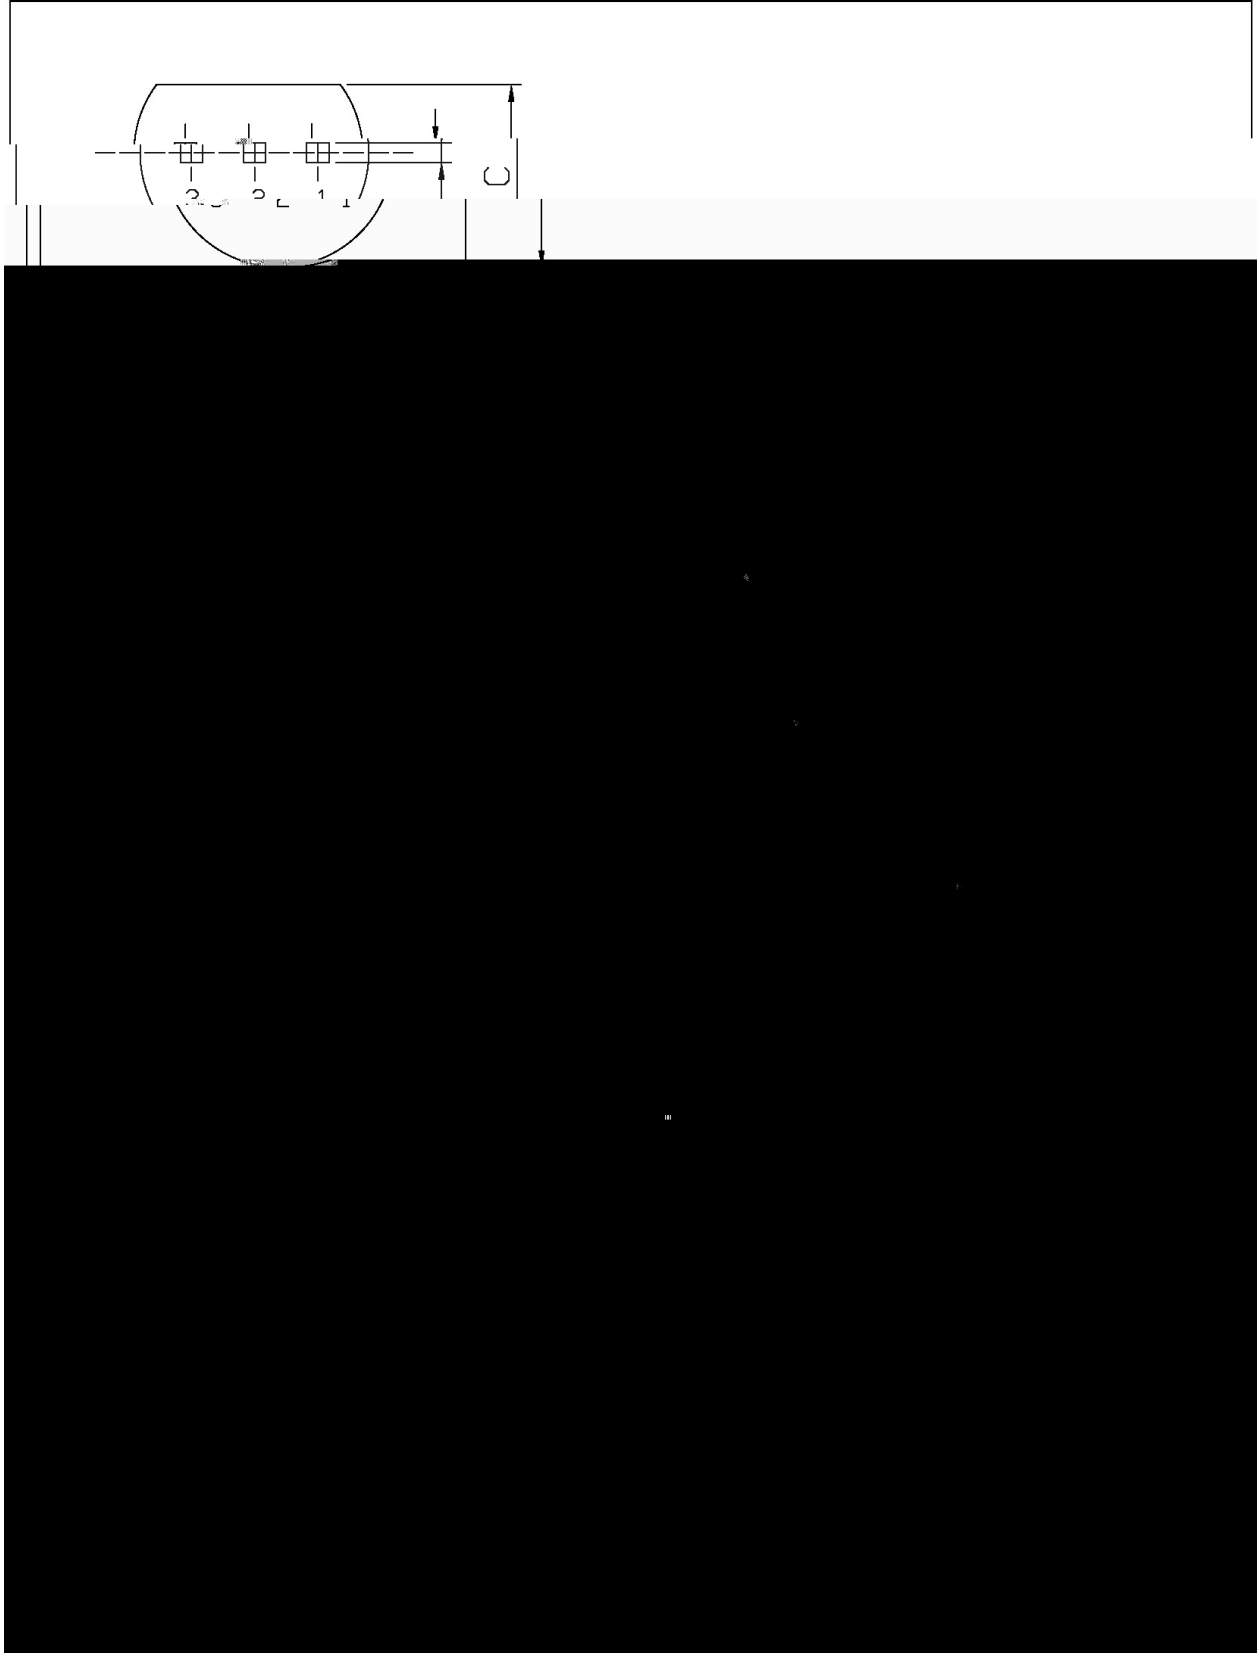


/ Marking Instructions

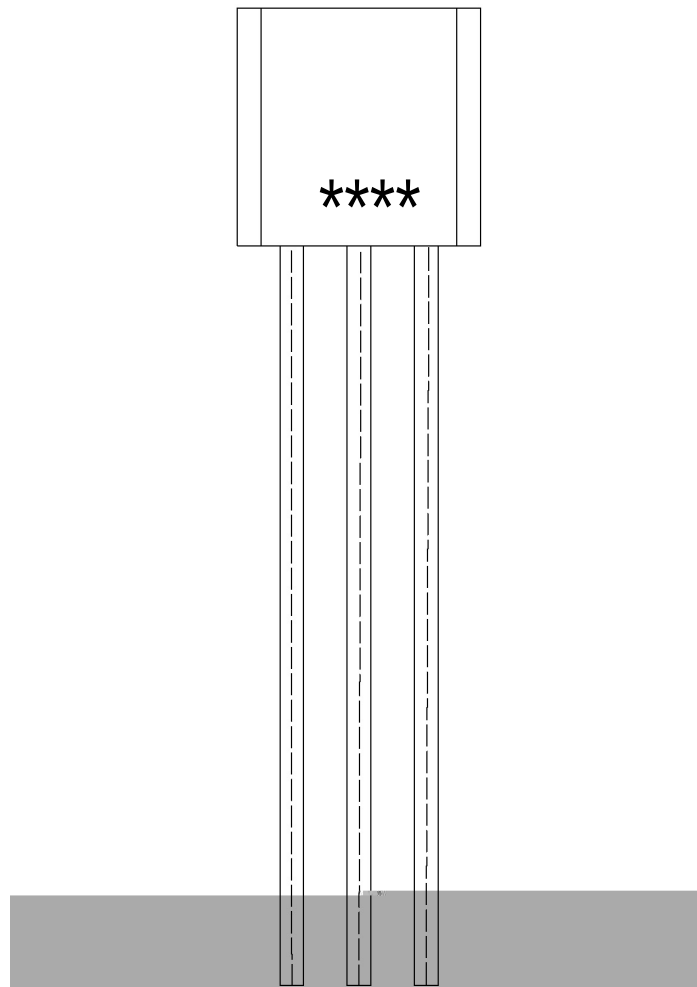

BR
97A8

() / Temperature Profile for Dip Soldering(Pb-Free)

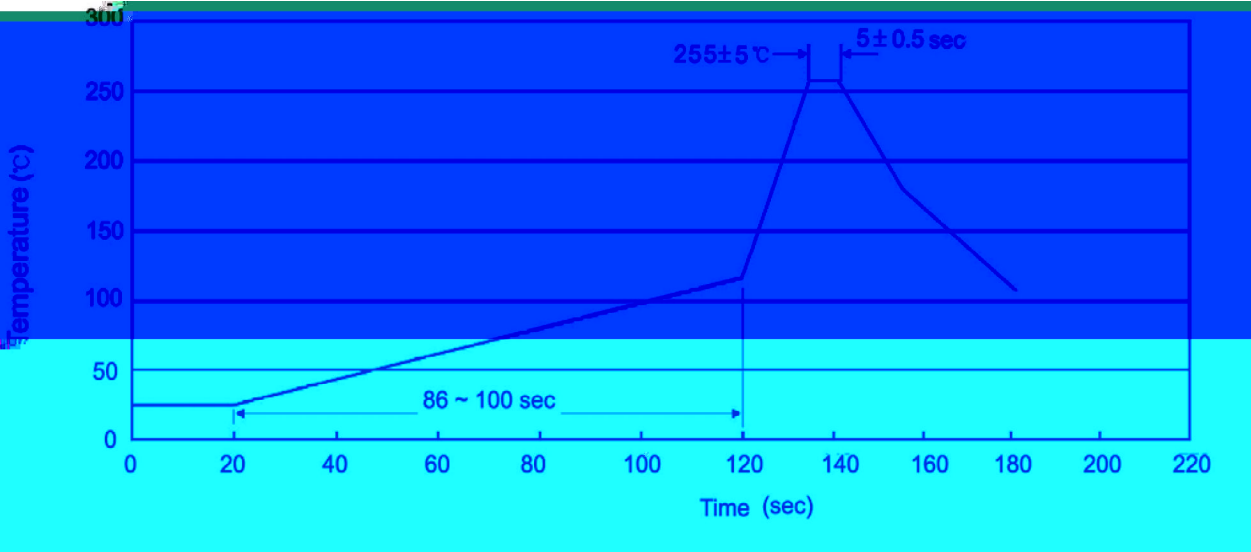

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Bag 只/袋	Bags/Inner Box 袋/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Bag 袋	Inner Box 盒	Outer Box 箱