


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit




/ Pinning




/ h_{FE} Classifications & Marking

/ Electrical Characteristic Curve

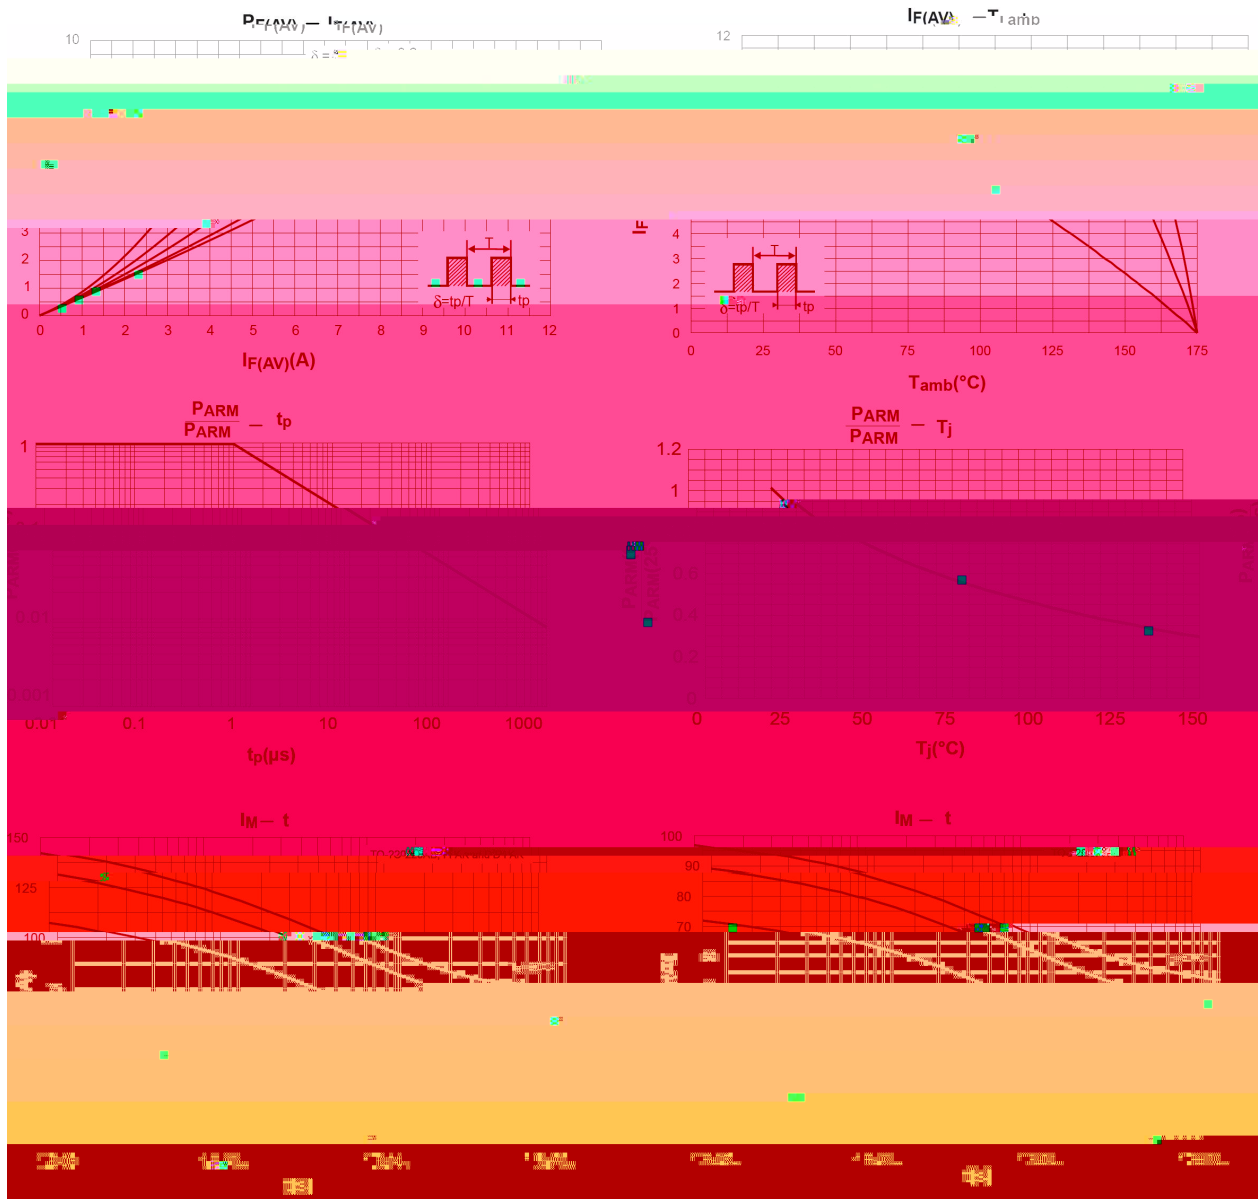


/ Electrical Characteristic Curve

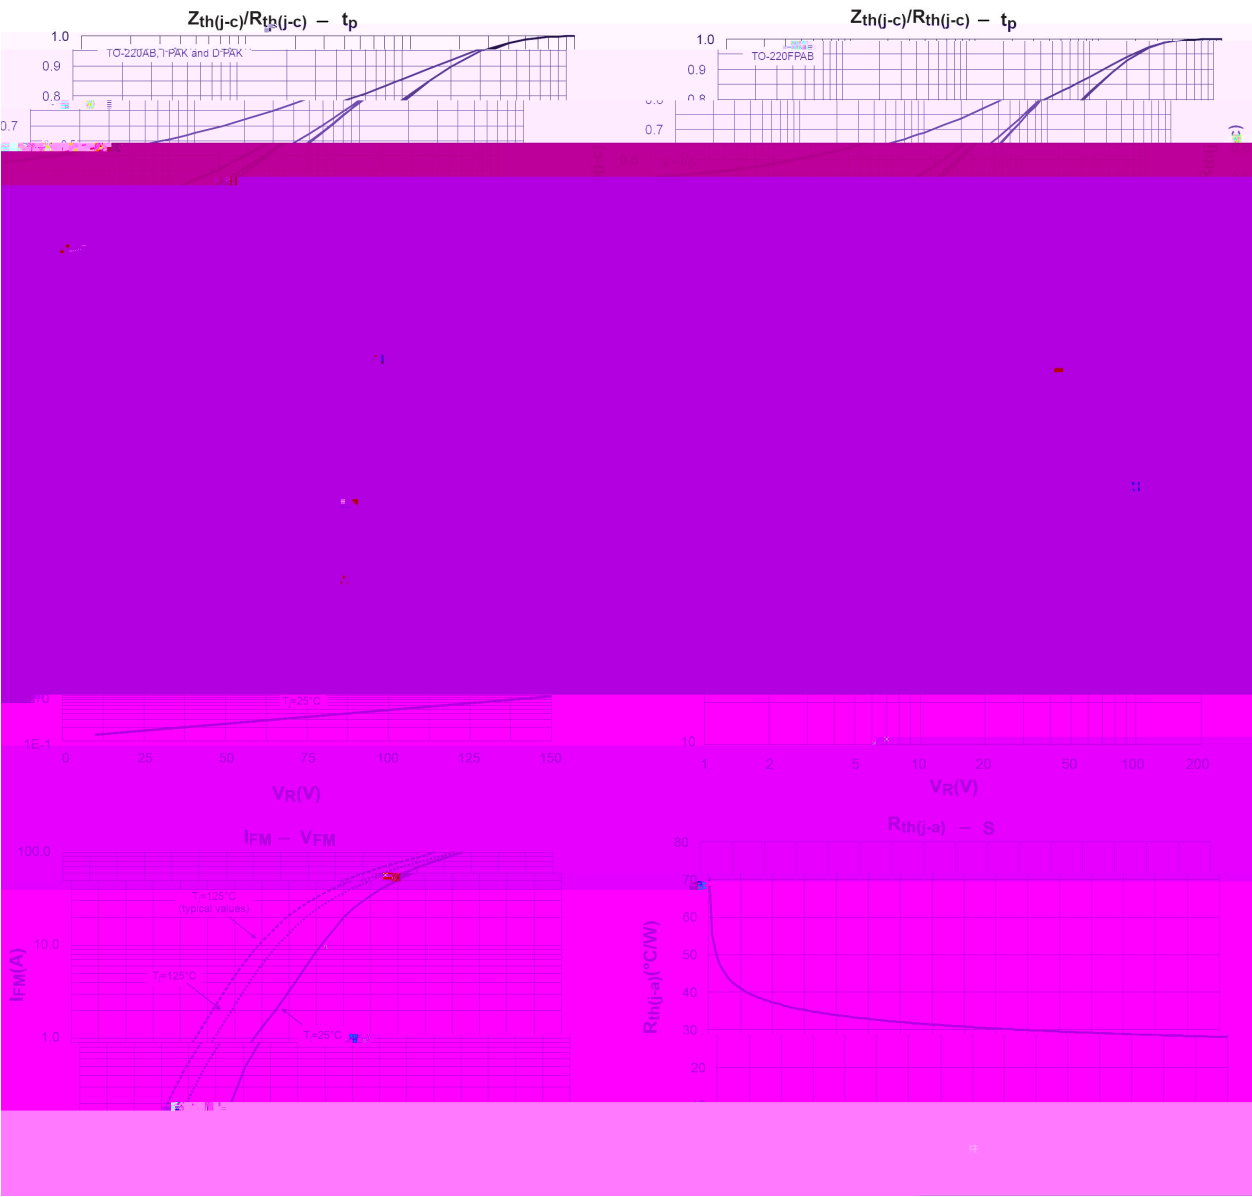

/ Package Dimensions


单位: mm

T0-220

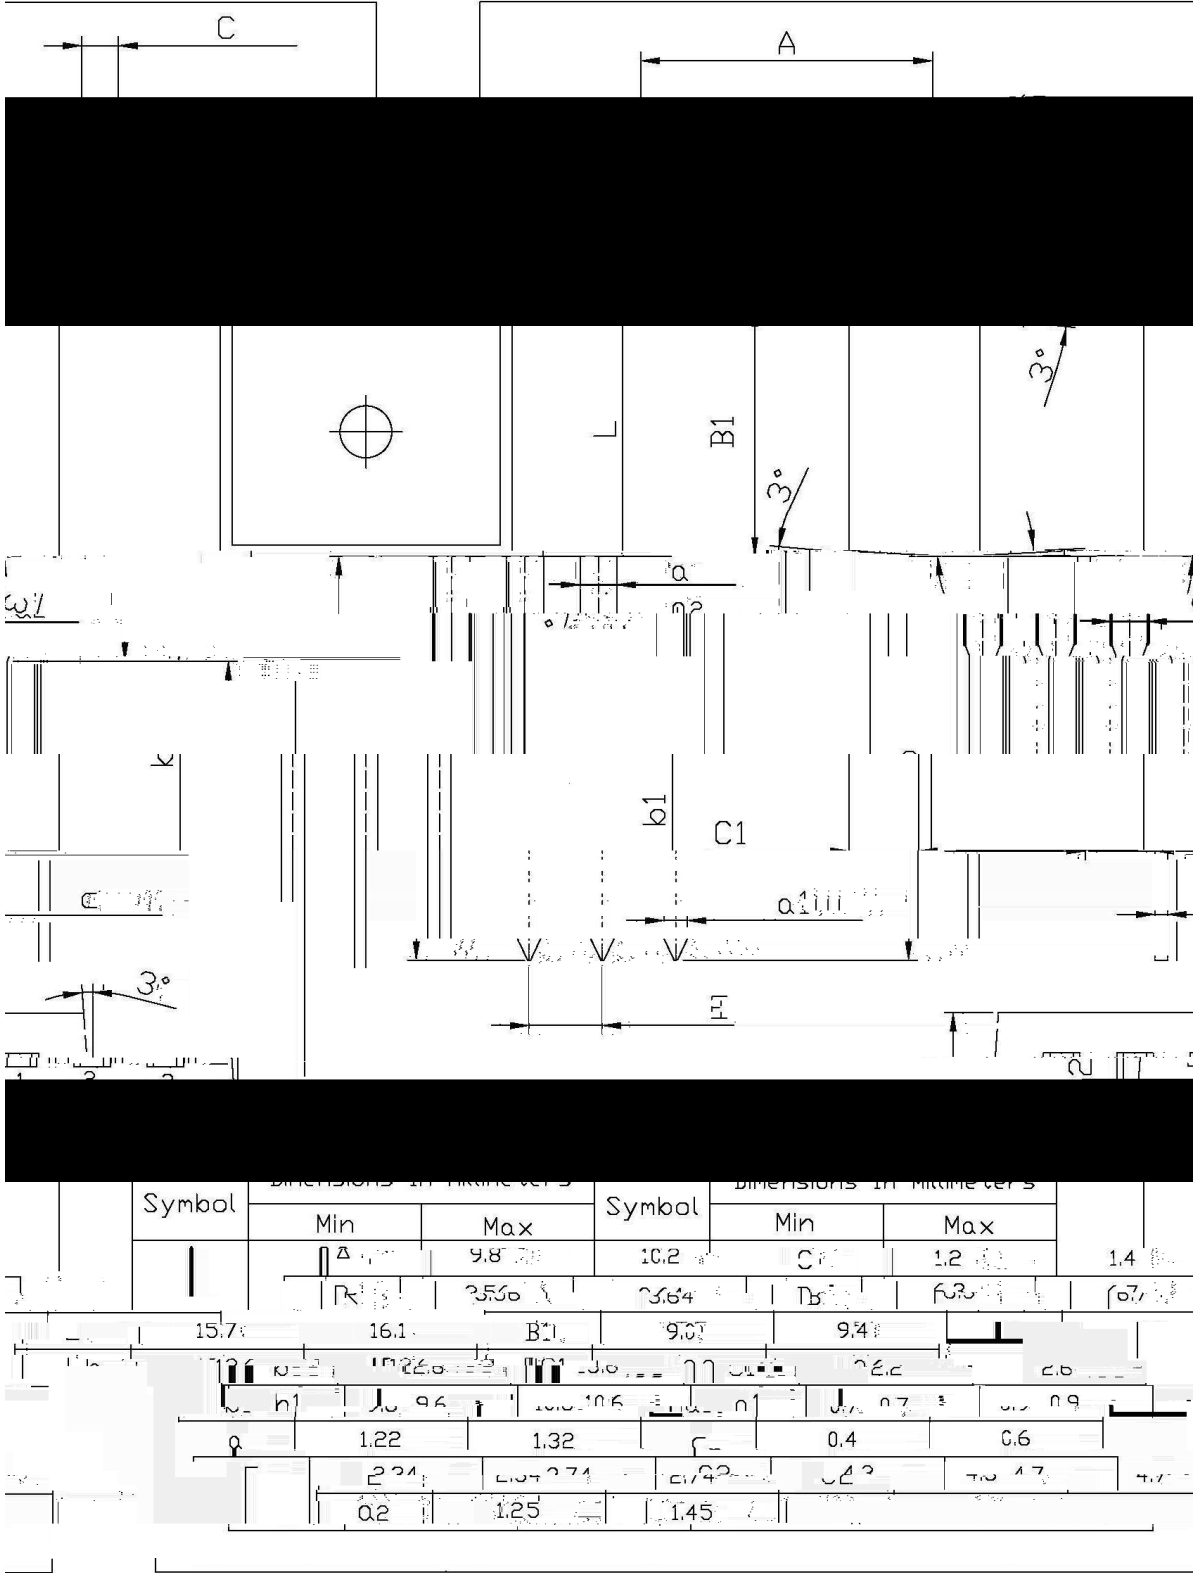


Symbol	Dimensions in mils		Symbol	Dimensions in millimeters	
	Min	Max		Min	Max
A	9.8	10.2	C1	1.2	1.4
B1	9.4	9.8	D	0.7	0.8
C	15.7	16.1	E	0.6	0.7
C1	1.2	1.4	F	0.4	0.6
h	0.9	1.0	G	0.4	0.6
k	1.22	1.32	H	0.4	0.6
L	1.25	1.45	I	0.4	0.6

/ Marking Instructions

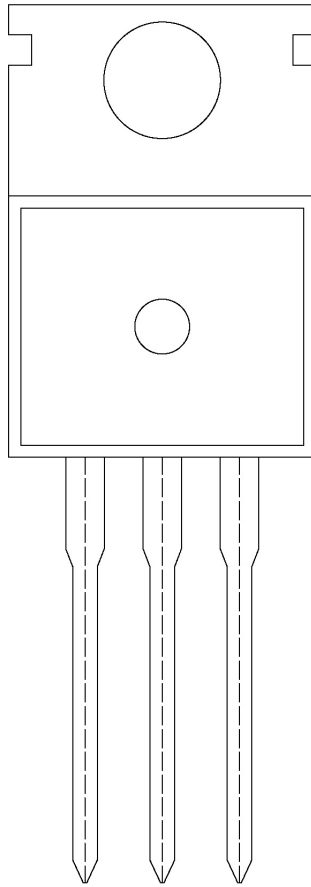

() / Temperature Profile for Dip Soldering(Pb-Free)

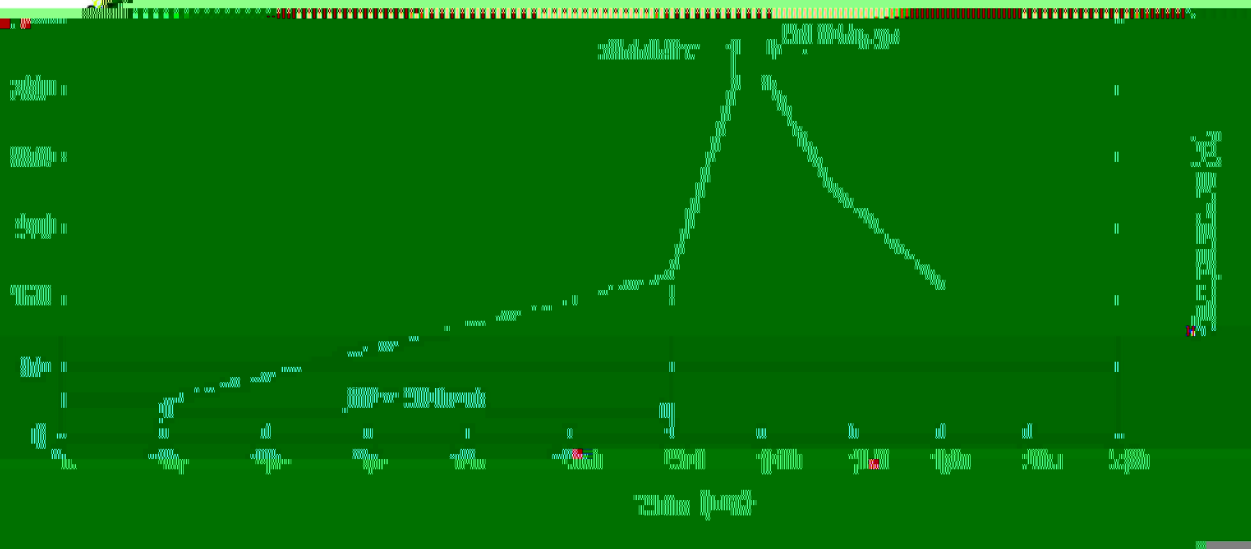

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

封装形式	包装数量										包装尺寸										：	100/TT
	Units/Bag 只/袋	Bags/Inner Box 袋/盒	Units/Inner Box 只/盒	In	Pack	01	003	T	05g	Sn13	10ute	41329	9(10no)	13 T	289.46	6 7.44	r361 nBT	6.48 4 T	6.48	247.74		