


/ Descriptions

TO-251


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning




/ h_{FE} Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)


/ Electrical Characteristics(Ta=25)

						μ

/ Electrical Characteristic Curve

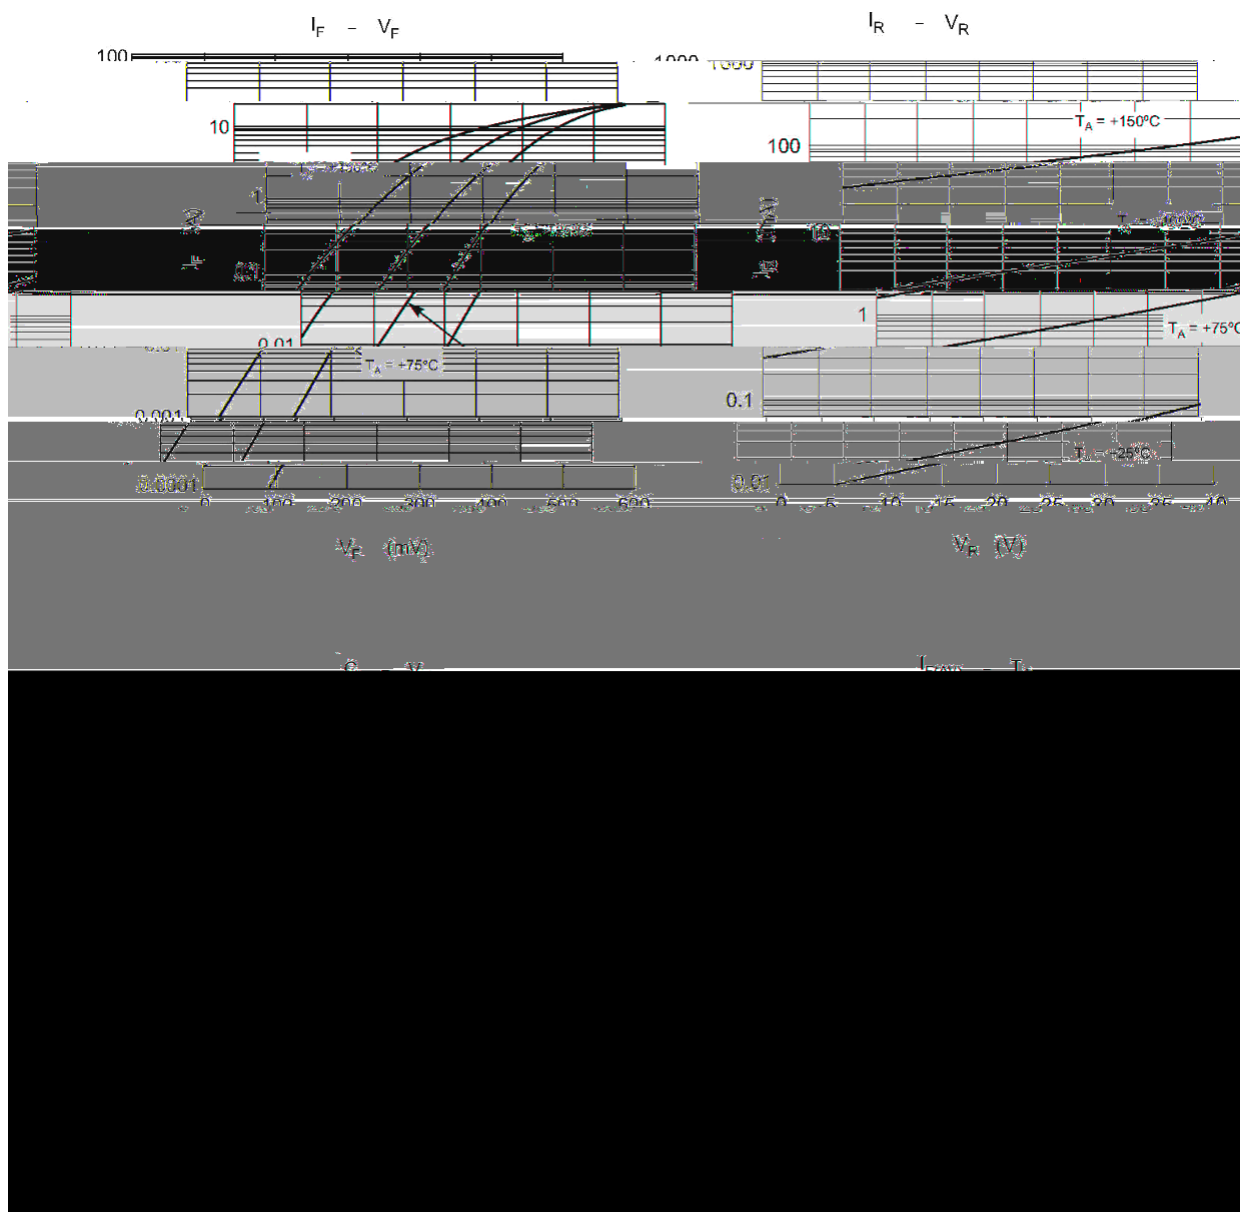


/ Package Dimensions

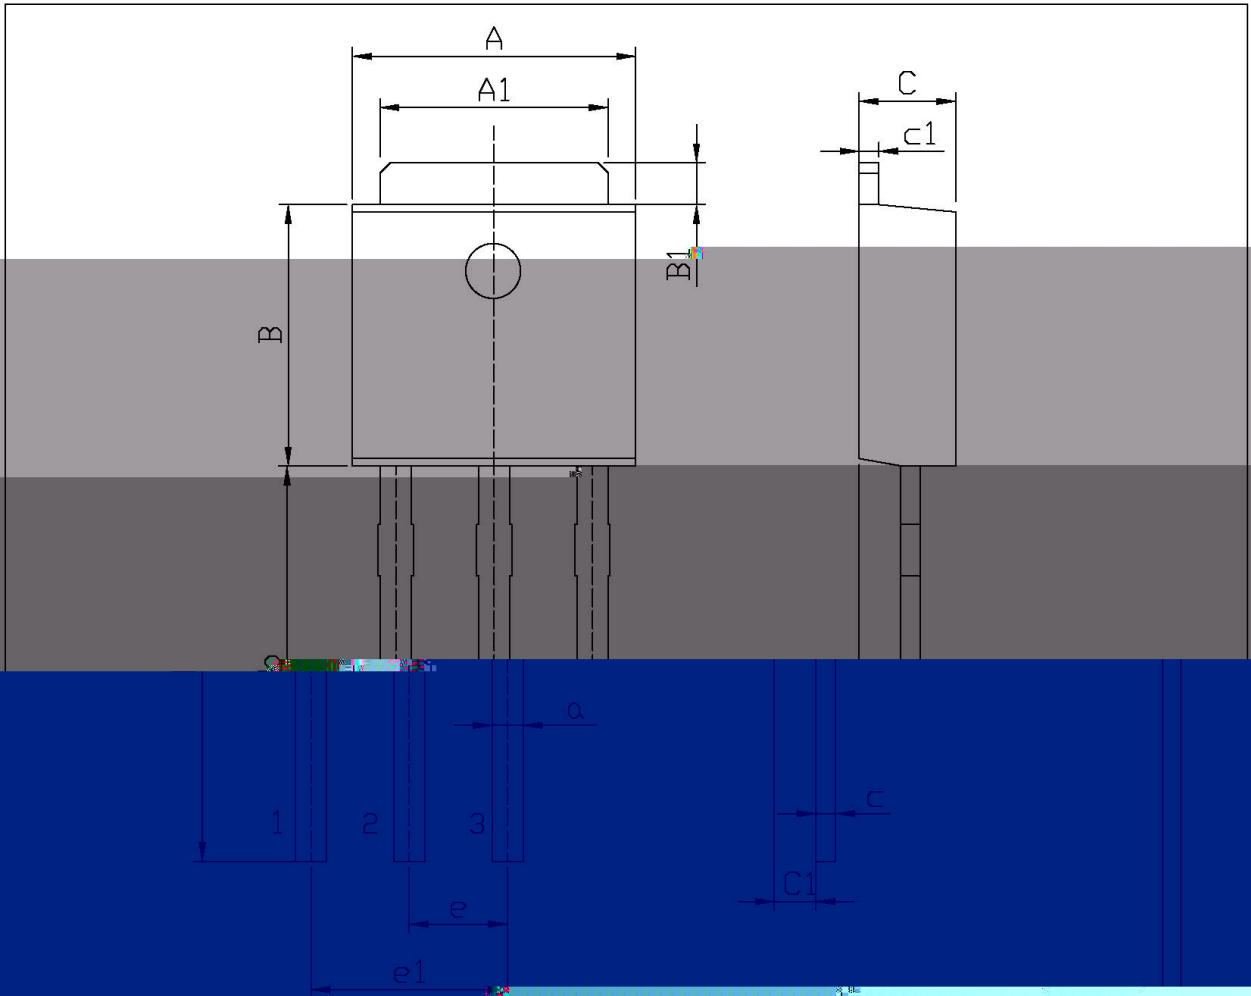


单位: mm

Dimensions In Millimeters		Symbol	Dimensions In Millimeters		Symbol
Min	Max		Min	Max	
6.45	6.75	a	0.50	0.70	A
5.10	5.50	b	9.00	9.40	A1

5.95	6.45	C	0.5	0.7	C1
------	------	---	-----	-----	----

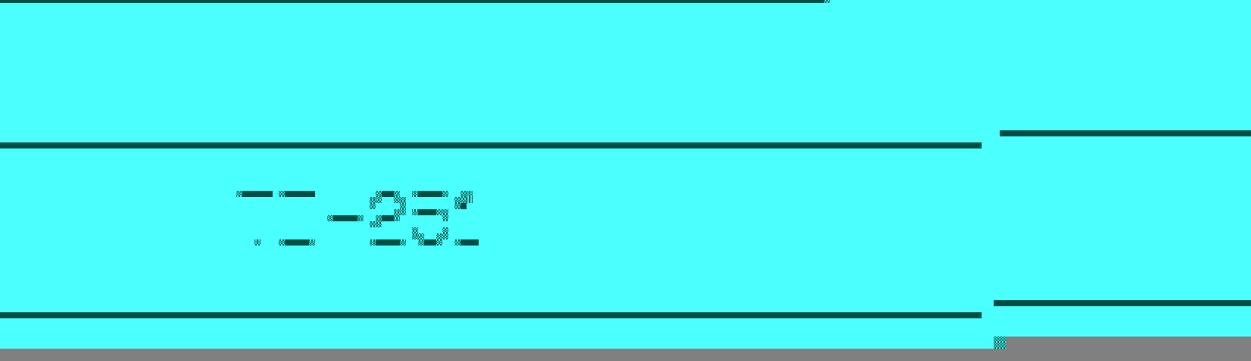

/ Marking Instructions

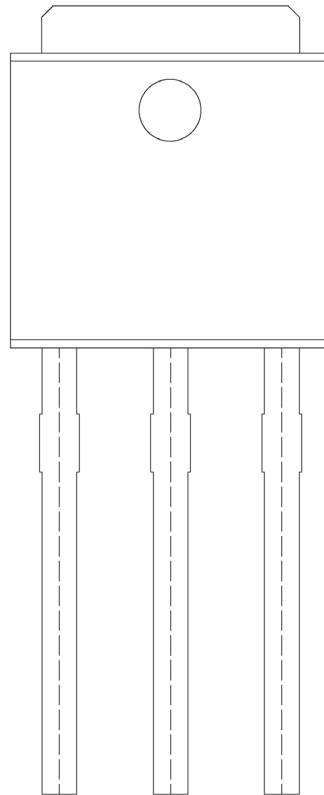

MBRI1040

MBRI1040

$\pm$ $\pm$

封装形式	包装数量					包装尺寸		
	Units/Bag 只/袋	Bags/Inner Box 袋/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Bag 袋	Inner Box 盒	Outer Box 箱
TO-251	1,000	10	10,000	5	50,000	135×190	237×172×102	560×245×195

封装形式	包装数量					包装尺寸		
	Units/Tube 只/套管	Tubes/Inner Box 套管/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Tube 套管	Inner Box 盒	Outer Box 箱
TO-251/252	75	48	3,600	5	18,000	526×20.5×5.25	555×164×50	575×290×180

6 6