


[illegible]

MMBT4401

SOT-23 NPN

1 ESD 4kV, 400V

Ic 500mA






/ hFE Classifications & Marking

	~


			°C
		~	°C

/ Electrical Characteristic Curve

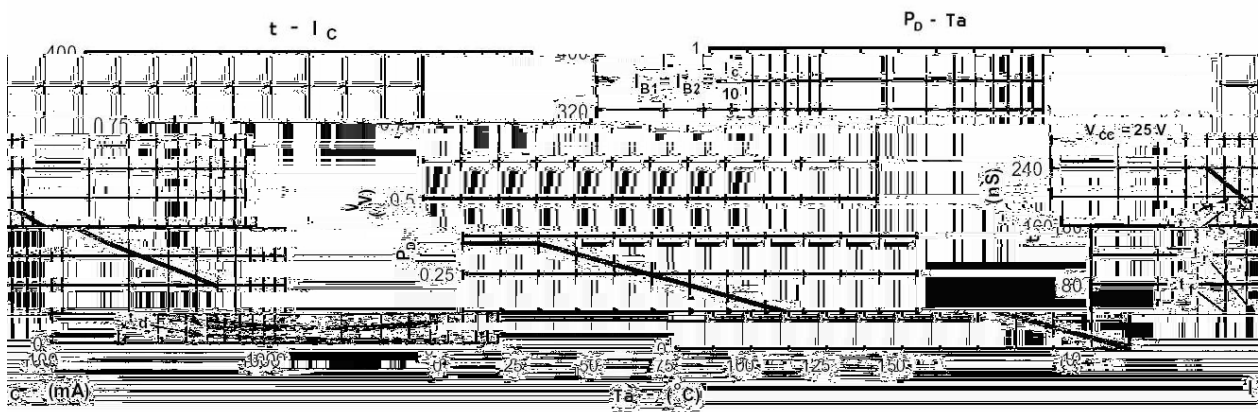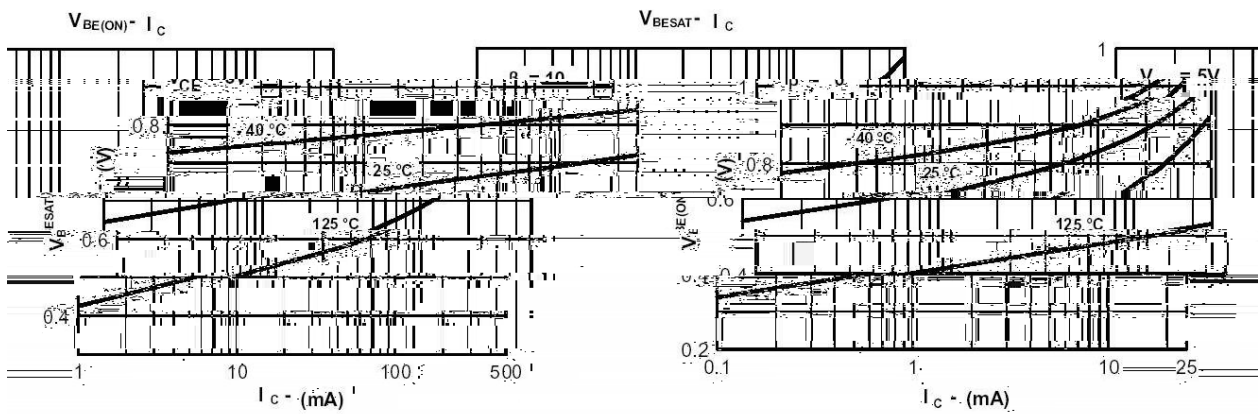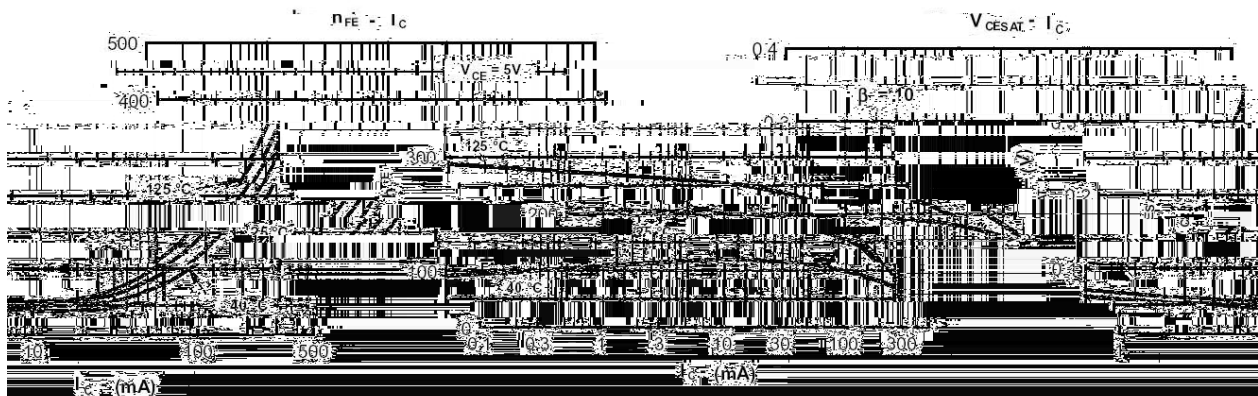


$$\nabla_{\mathbf{I}} \Pi = \nabla_{\mathbf{I}} \Pi$$

前位
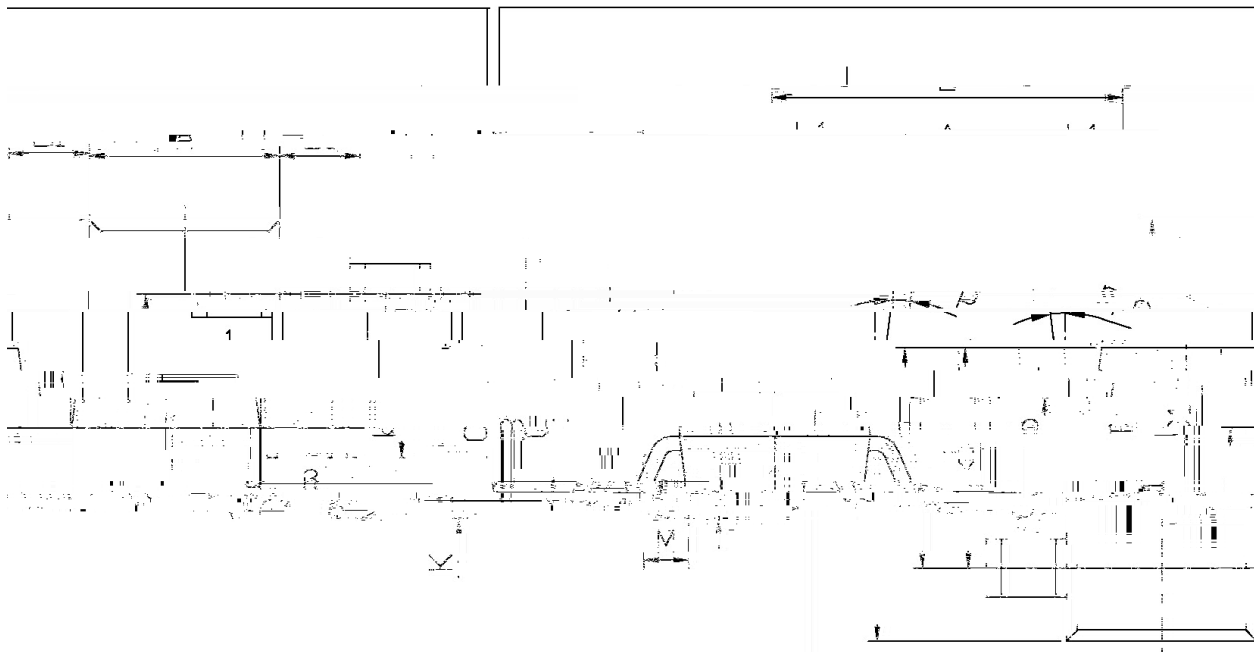
$$\text{---} \text{CH}_2 \text{---} \text{CH}(\text{CH}_3) \text{---} \text{CH}_2 \text{---} \text{CH}(\text{CH}_3) \text{---} \text{CH}_2 \text{---} \text{CH}(\text{CH}_3) \text{---}$$


/ Marking Instructions

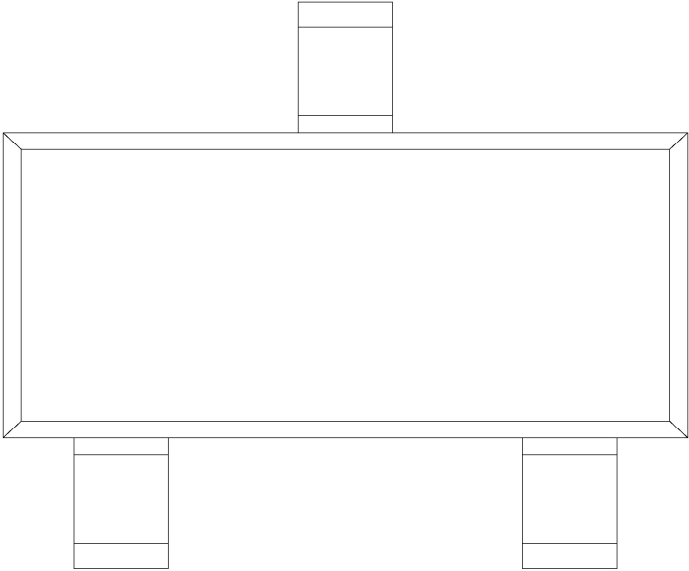

H

H

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

±

°C

±

°C

±

°C

±

°C

/ Resistance to Soldering Heat Test Conditions

±

°C

±

°C

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-23	3,000	10	30,000	6	180,000	7" ×8	180×120×180	390×385×205