


/ Descriptions

Ultrafast Recovery Diode in a TO-263 Plastic Package.



Silicon epitaxial process to produce ultrafast recovery diode with low reverse leakage current and high reliability.

For high frequency, high voltage, high current rectifier diode, freewheeling diode.



PIN1 Anode

PIN 2,4 Cathode

PIN 3 Anode

/ h_{FE} Classifications & Marking

See Marking Instructions.

/ Absolute Maximum Ratings(Ta=25)

Parameter	Symbol	Rating	Unit
Peak Repetitive Reverse Voltage	V_{RRM}	600	V
RMS Voltage	V_{RMS}	420	V
DC Blocking Voltage	V_{DC}	600	V
Average Forward Current	I_F	2×8	A
Non Repetitive Peak Surge Current	I_{FSM}	125	A
Thermal Resistance Junction to Case	$R_{\theta JC}$	2.5	/W
Junction and Storage Temperature Range	T_j, T_{stg}	-55~150	

/ Electrical Characteristics(Ta=25)






Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Forward Voltage	V_F	$I_F=8A(T_C=25^{\circ}C)$			1.8	V
		$I_F=8A(T_C=150^{\circ}C)$		1.05	1.3	V
		$I_F=16A(T_C=125^{\circ}C)$			2.0	V
		$I_F=16A(T_C=150^{\circ}C)$		1.28	1.6	V
Instantaneous Reverse Current ^(Note1)	I_R	$V_R=600V(T_a=25^{\circ}C)$			5	μA
		$V_R=600V(T_a=150^{\circ}C)$		16	100	μA
Reverse Recovery Time	t_{rr}	$I_F=0.5A \quad I_R=1.0A$ $I_{RR}=0.25A$			50	ns

/Notes:


effect. /Short duration pulse test used to minimize self-heating

2. 。 / Unless otherwise noted, values for the parameters of a single chip


/ Electrical Characteristic Curve

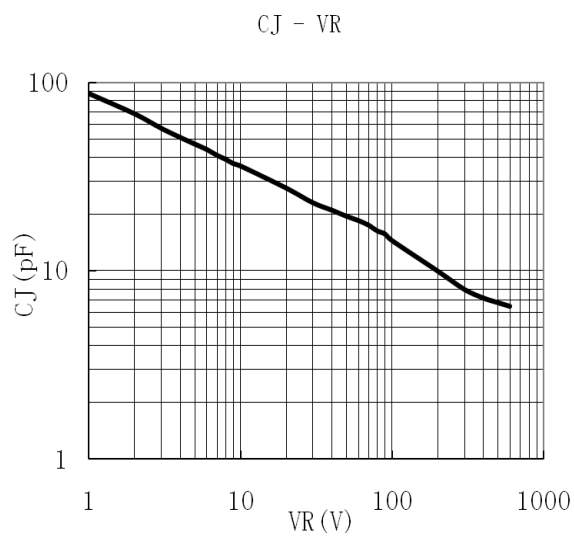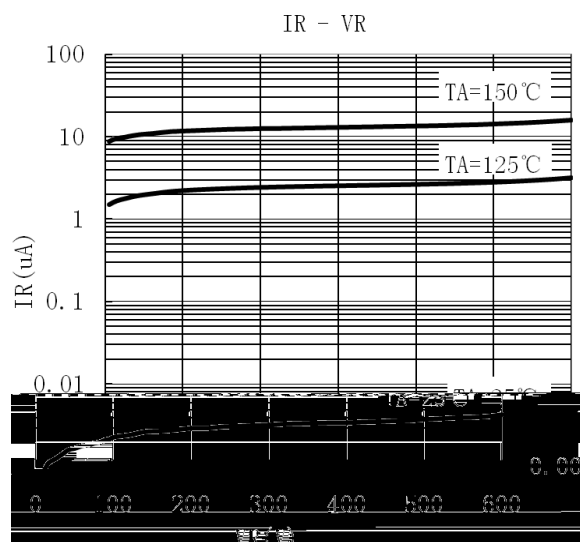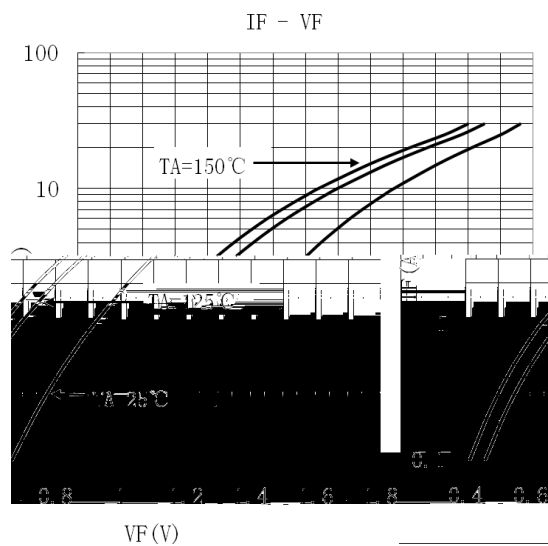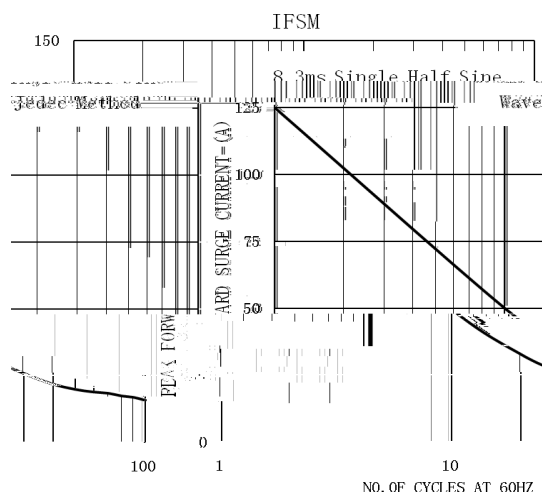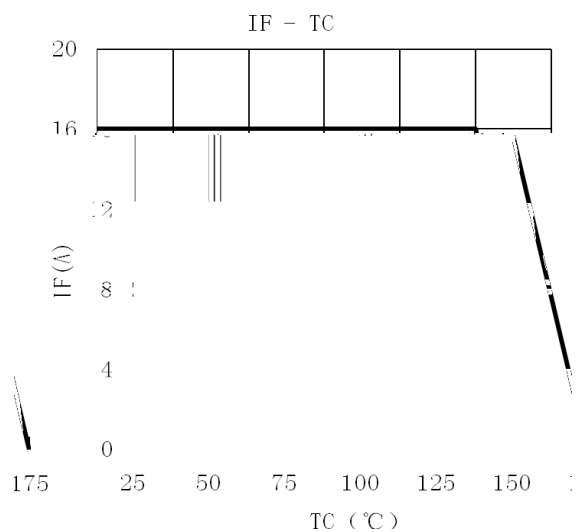

/ Package Dimensions

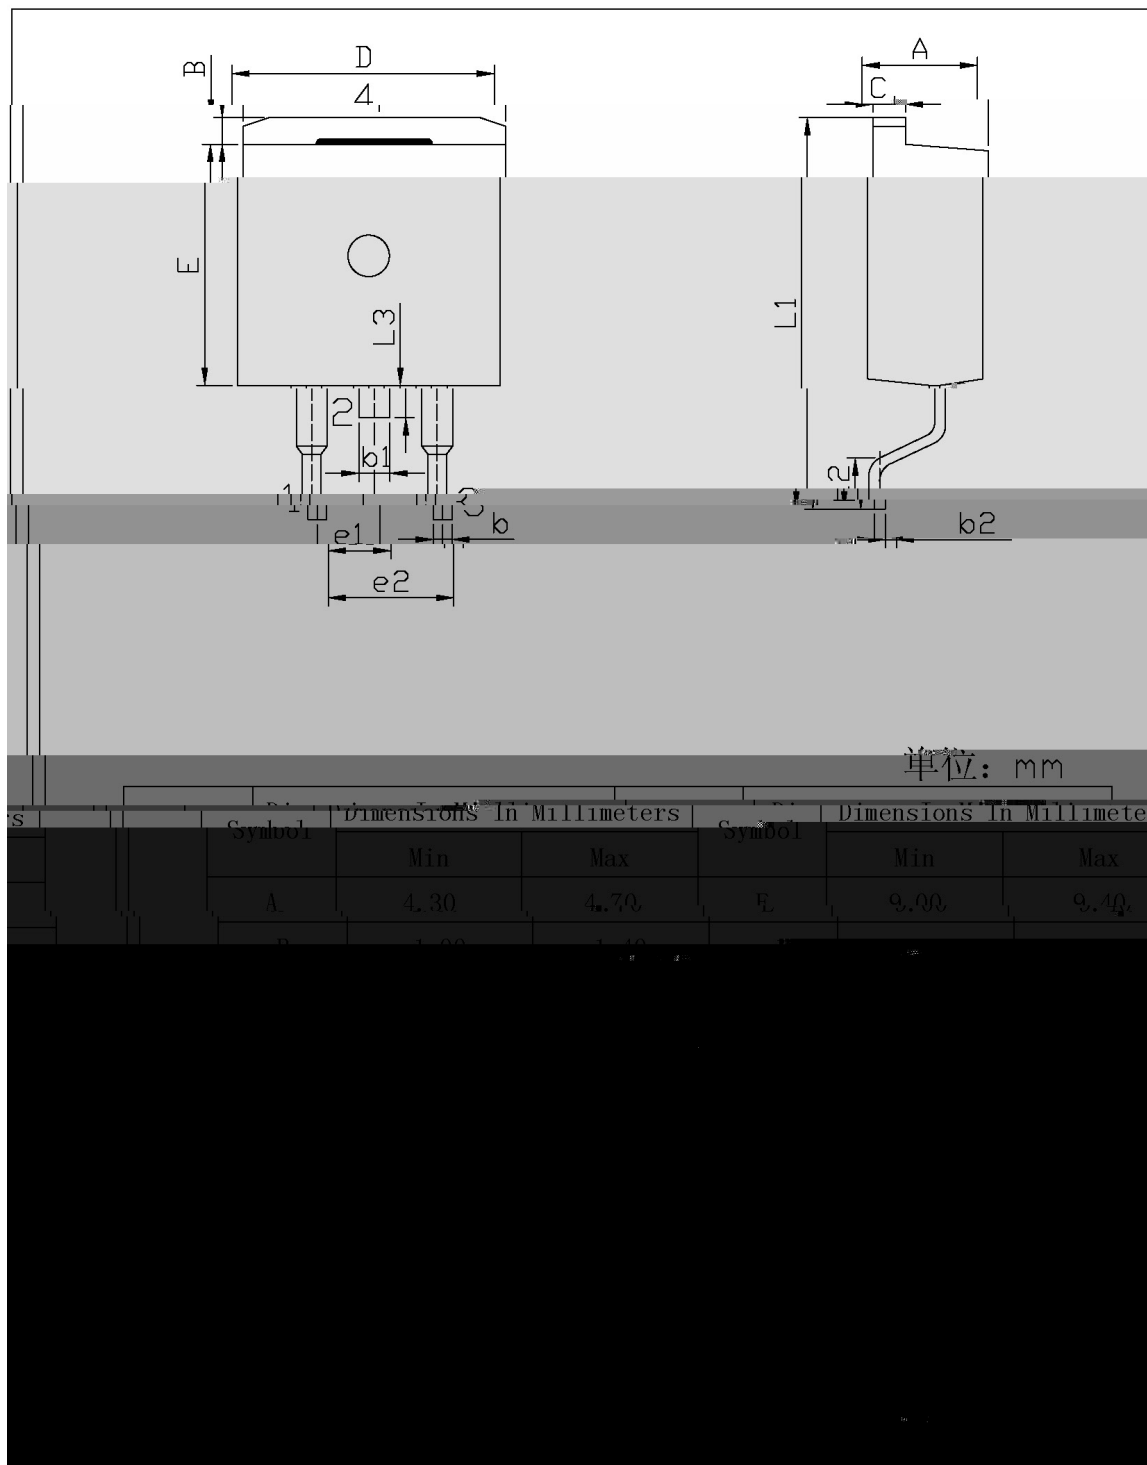

/ Marking Instructions

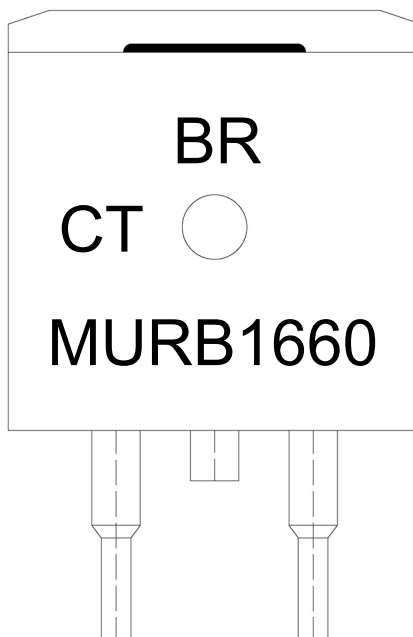

BR

Note:

BR:

Company Code.

Product Type.


:

Internal Structure

****:

Lot No. Code, code change with Lot No.

() /

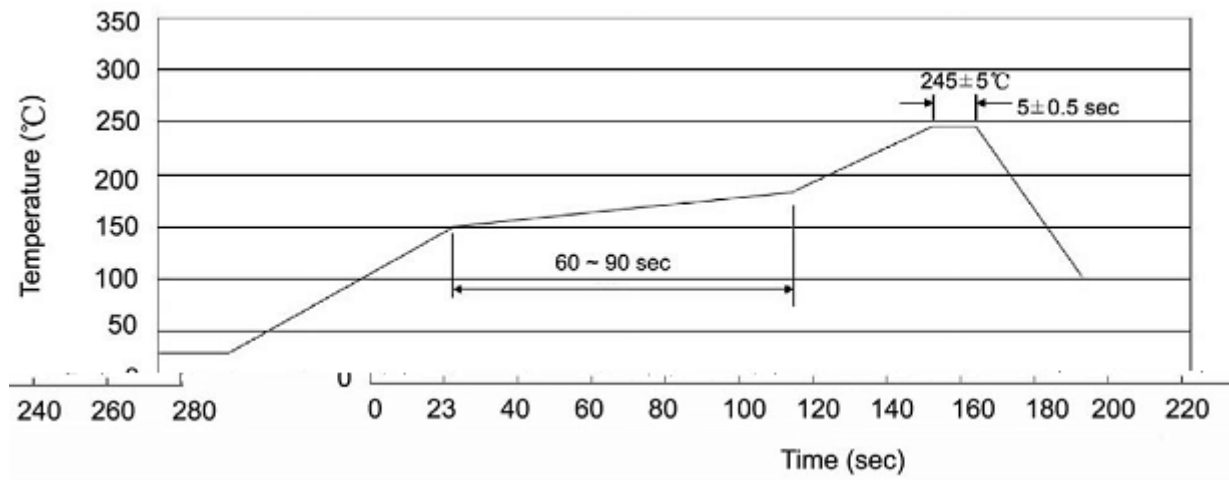

Note:

- 1

25 150

60 90sec;
- 2

245 5

5 0.5sec;
- 3

2 10

/sec.
- 1.Preheating:25~150

, Time:60~90sec.
- 2.Peak Temp.:245 5

, Duration:5 0.5sec.
3. Cooling Speed: 2~10

/sec.

/ Resistance to Soldering Heat Test Conditions

260 5 10 1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱
						"		

/ TUBE

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	只 套管	套 套套	套 套套	套 套套	套 套套			