

/ Revised record

/ Descriptions

SOT-23 塑封封装精密可调基准电源。

Precision adjustable shunt regulator in a SOT-23 Plastic Package.

/ Features

精确参照电压 1.240V，允许电压误差为 0.5%、1%，阴极电流能力为 100uA ~ 100mA，快速导通，可调节输出电压为 $V_O = V_{ref} \sim 20V$ ，阴极工作电流低(典型值:55μA)，动态输出阻抗低(典型值:0.05Ω)，无卤产品。


Precise reference voltage to 1.240V, guaranteed 0.5%, 1%, reference voltage Tolerance, sink current capability, 100uA ~ 100mA, quick turn-on, adjustable output voltage, $V_O = V_{ref} \sim 20V$, low operational cathode current, 55μA typical, 0.05Ω typical output impedance, HF Product.

/ Applications


用于线性调整器，可调节电源和开关电源。

Linear regulators, adjustable power supply, switching power supply.

/ Equivalent Circuit



/ Pinning

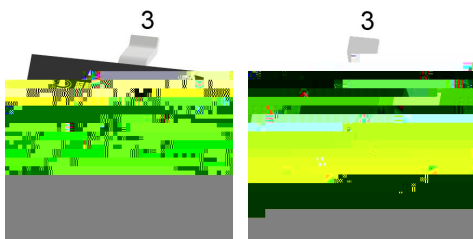

PIN1 : R

PIN 2 : K

PIN 3 : A

/ Marking

Marking	H432
---------	------

/ Absolute Maximum Ratings(Ta=25)

参数 Parameter	符号 Symbol	数值 Rating	单位 Unit
Cathode voltage	V_{KA}	20	V
Continuous cathode current range	I_K	-100~+100	mA
Reference current range	I_{REF}	10	mA
Power Dissipation	P_D	370	mW
Ambient temperature range	T_{amb}	-40~125	°C
Junction Temperature	T_j	150	°C
Storage Temperature Range	T_{stg}	-65~150	°C

/ Electrical Characteristics(Ta=25)

参数 Parameter	符号 Symbol	测试条件 Test Conditions	最小值 Min	典型值 Typ	最大值 Max	单位 Unit
Reference voltage	V_{REF}	$V_{KA}=V_{REF}$ $I_K=10mA(A=0.5\%)$	1.234	1.240	1.246	V
		$V_{KA}=V_{REF}$ $I_K=10mA(B=1\%)$	1.228	1.240	1.252	V
Reference voltage drift over temp. range	$\Delta V_{REF}/T$	$V_{KA}=V_{REF}$ $I_K=10mA$ $T_A=-40\sim 85^{\circ}C$		3	10	mV
Voltage ratio (open loop gain)	$\Delta V_{REF}/\Delta V_{KA}$	$I_K=10mA$ $\Delta V_{KA}=V_{REF}$ to 16V		-0.5	-1.5	mV/V
Reference current	I_{REF}	$I_K=10mA$ $R_1=10K\Omega$ $R_2=open$ $T_A=-40\sim 85^{\circ}C$		0.1	0.4	μA
		$I_K=10mA$ $R_1=10K$ $R_2=open$		0.15	0.4	μA
Min. cathode current	$I_{K(min)}$	$V_{KA}=V_{REF}$		55	80	μA
Off-state cathode current	$I_{K(off)}$	$V_{KA}=18V$ $V_{REF}=0V$		0.04	0.1	μA
		$V_{KA}=6V$ $V_{REF}=0V$		0.01	0.05	μA
Dynamic impedance	$ Z_{KA} $	$V_{KA}=V_{REF}$ $I_K=1mA$ to 100mA, $f\leq 1.0KHz$		0.05	0.15	Ω

/ Electrical Characteristic Curve



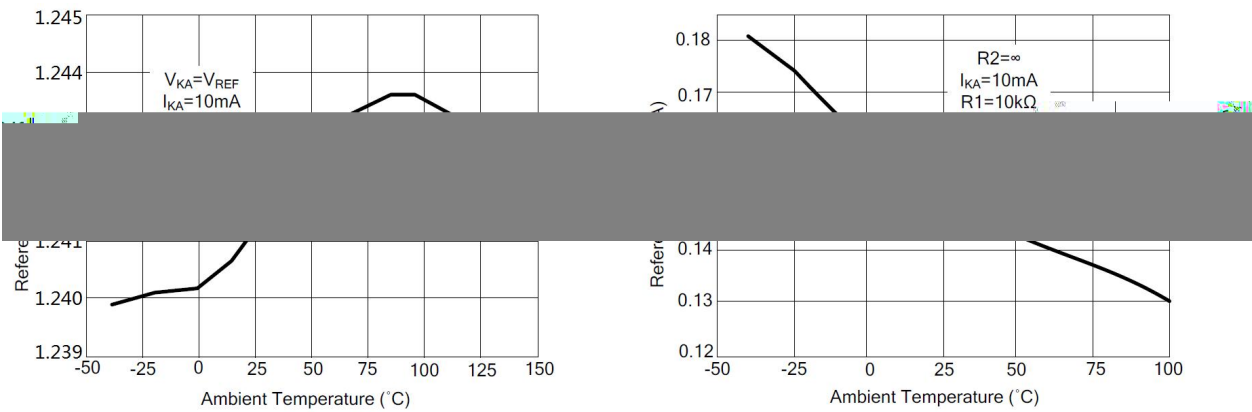


Figure 1. Reference Voltage V_S VS. Ambient Temperature



Figure 2. Reference Current I_S VS. Ambient Temperature

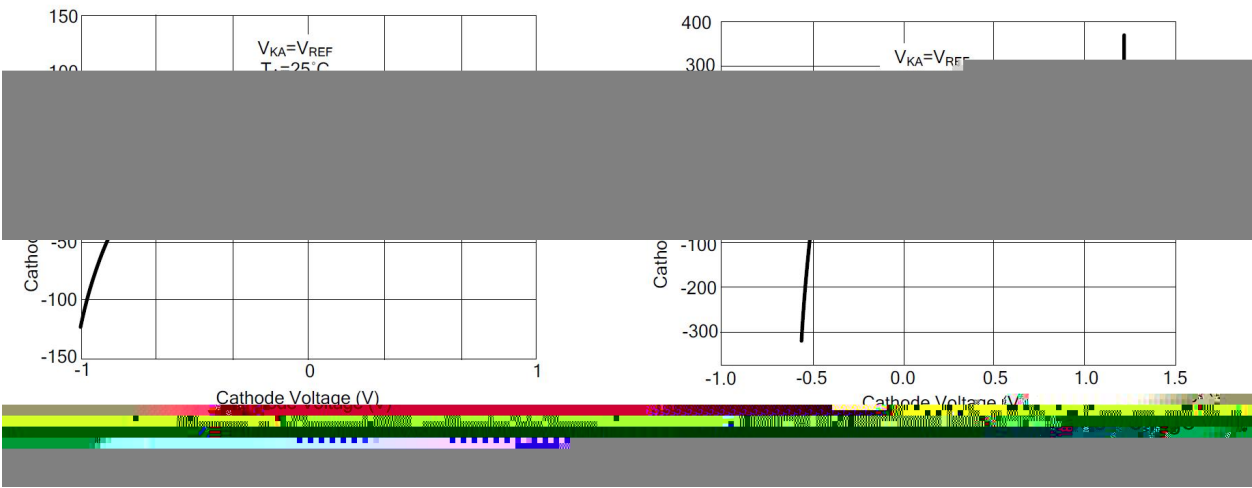




& Test circuits&Typical Application

BLOCK DIAGRAM:

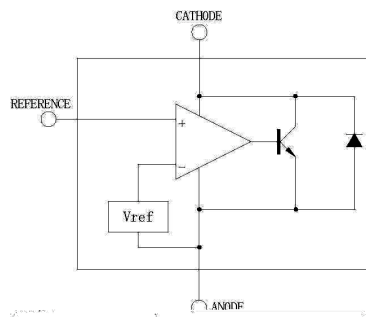

TEST CIRCUITS:

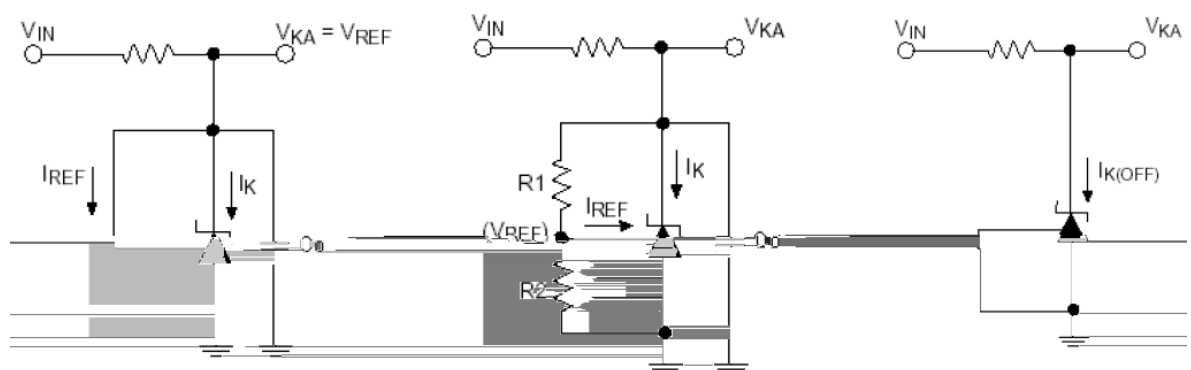


Test Circuit For $V_{KA}=V_{REF}$,
 $C_o=0.1\mu F$

Test Circuit for $V_{KA} \geq V_{REF}$
 $C_o=0.1\mu F$

Test Circuit For $I_{K(OFF)}$


TYPICAL APPLICATIONS:

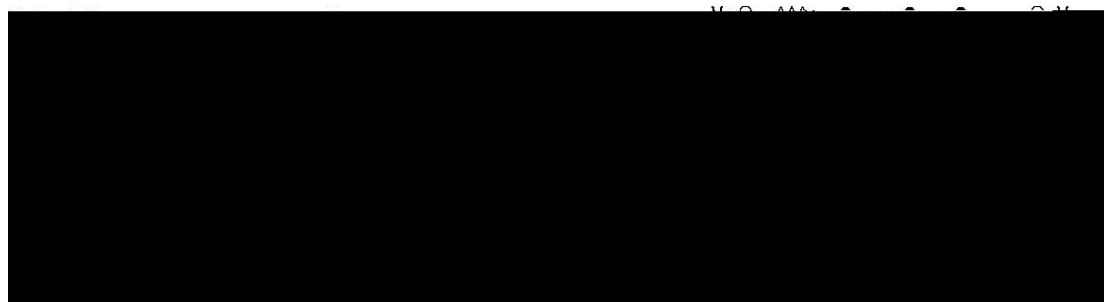

Shutdown Regulator

Higher-current Shunt


/ Package Dimensions

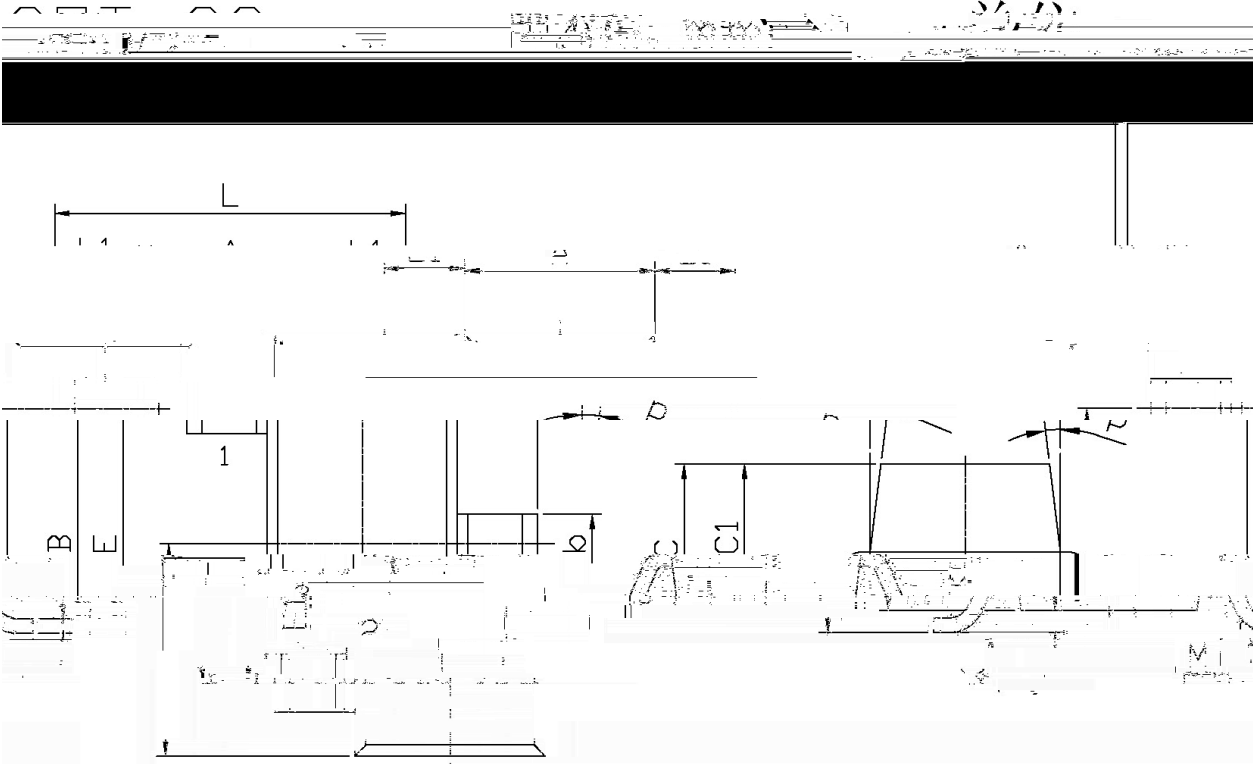

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
L	2.2	2.7	C	1.30Max	
L1	0.45	0.65	C1	0.90	1.20
A	115	150	C	0.05	0.20

B	2.70	3.10	K	0.10
E	1.70	2.10	M	0.20
			C35	0.35

/ Marking Instructions

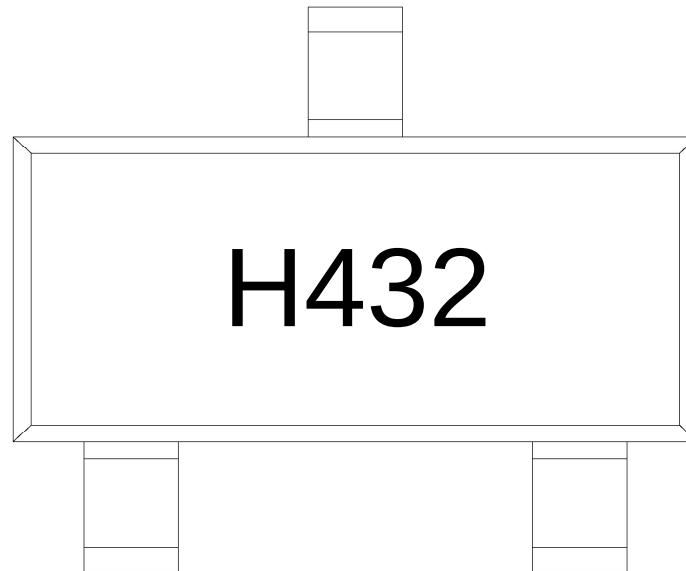

说明：


H： 为公司代码

432： 为型号代码


Note:

H: Company Code

432: Product Type



() / Temperature Profile for IR Reflow Soldering(Pb-Free)

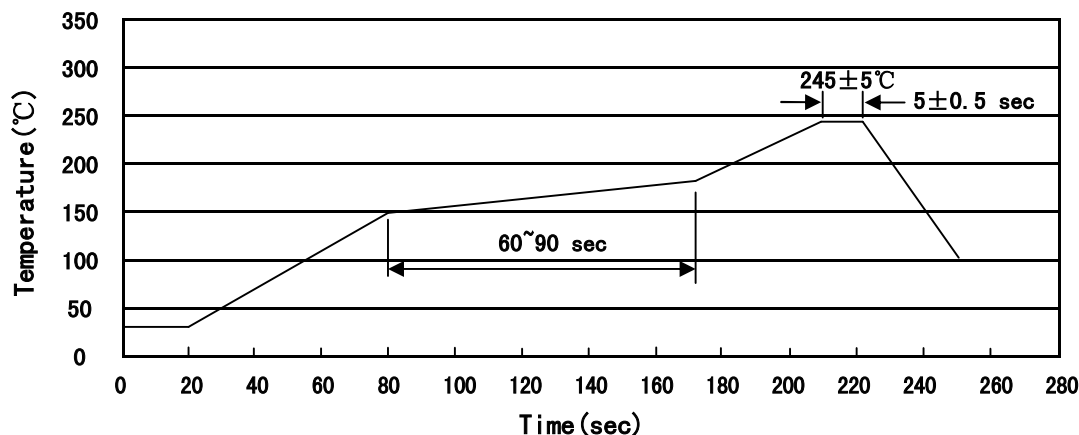

Note:

- | | | | | | |
|---|-------|-----|----|-----------|--|
| 1 | 150 | 180 | 60 | 90sec; | 1.Preheating:150~180°C, Time:60~90sec. |
| 2 | 245±5 | | | 5±0.5sec; | 2.Peak Temp.:245±5°C, Duration:5±0.5sec. |
| 3 | | | 2 | 10°C/sec. | 3. Cooling Speed: 2~10°C/sec. |

/ Resistance to Soldering Heat Test Conditions

260±5°C 10±1 sec. Temp.:260±5°C Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box	Outer Box
SOT-23	3,000	10	30,000	6	180,000	7" ×8	180×120×180	390×385×205

/ Notices