

/ Descriptions

50V~1000V 2.0A SMAF

/ Features

RoHS 2011/65/EU

/ Applications

/ Equivalent Circuit




/ Pinning



PIN	DESCRIPTION
1	Cathode
2	Anode

The recommended mounting pad size

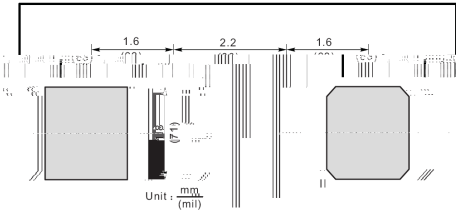


/ Marking

/ Absolute Maximum Ratings(Ta=25)


	θ								

/ Electrical Characteristics(Ta=25)

/ Electrical Characteristic Curve

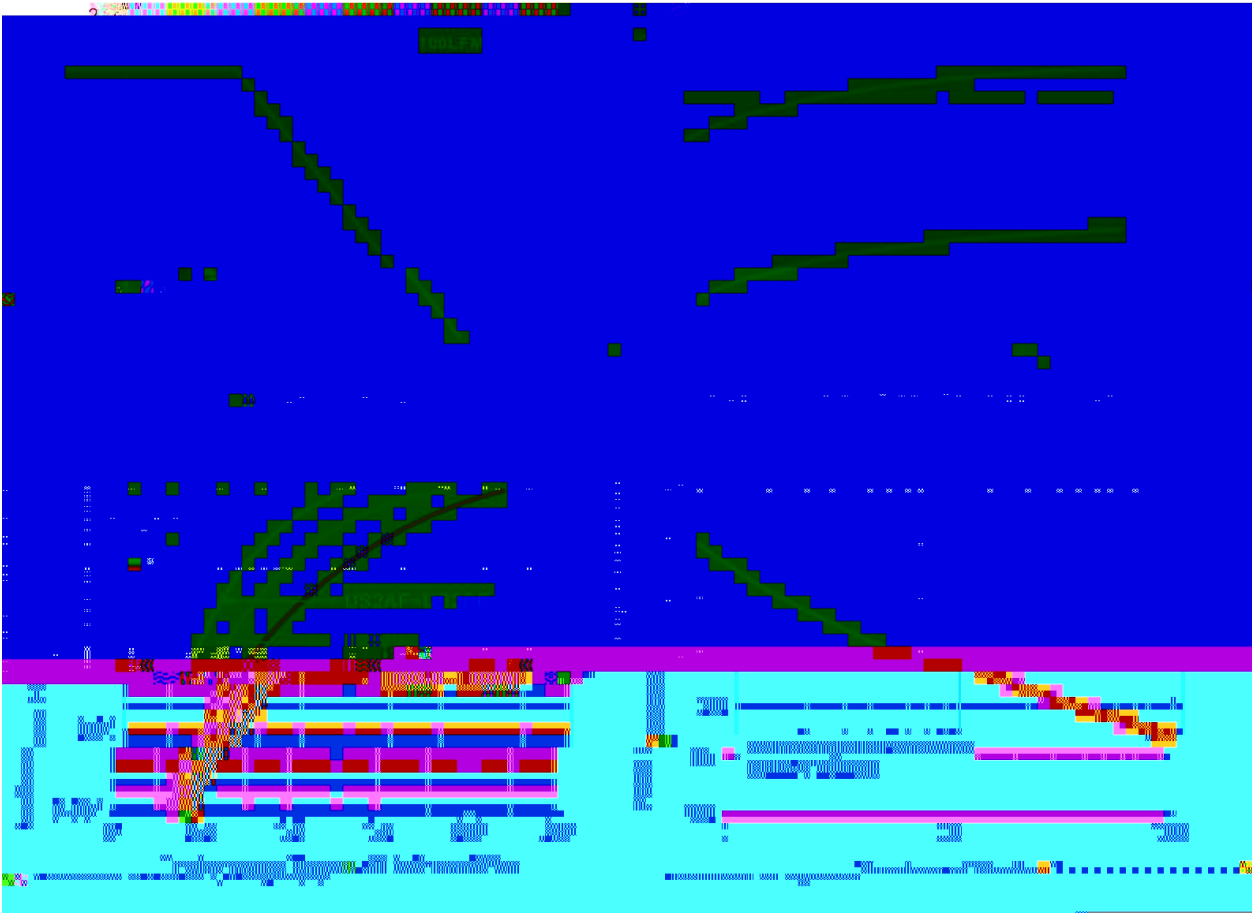


/ Package Dimensions

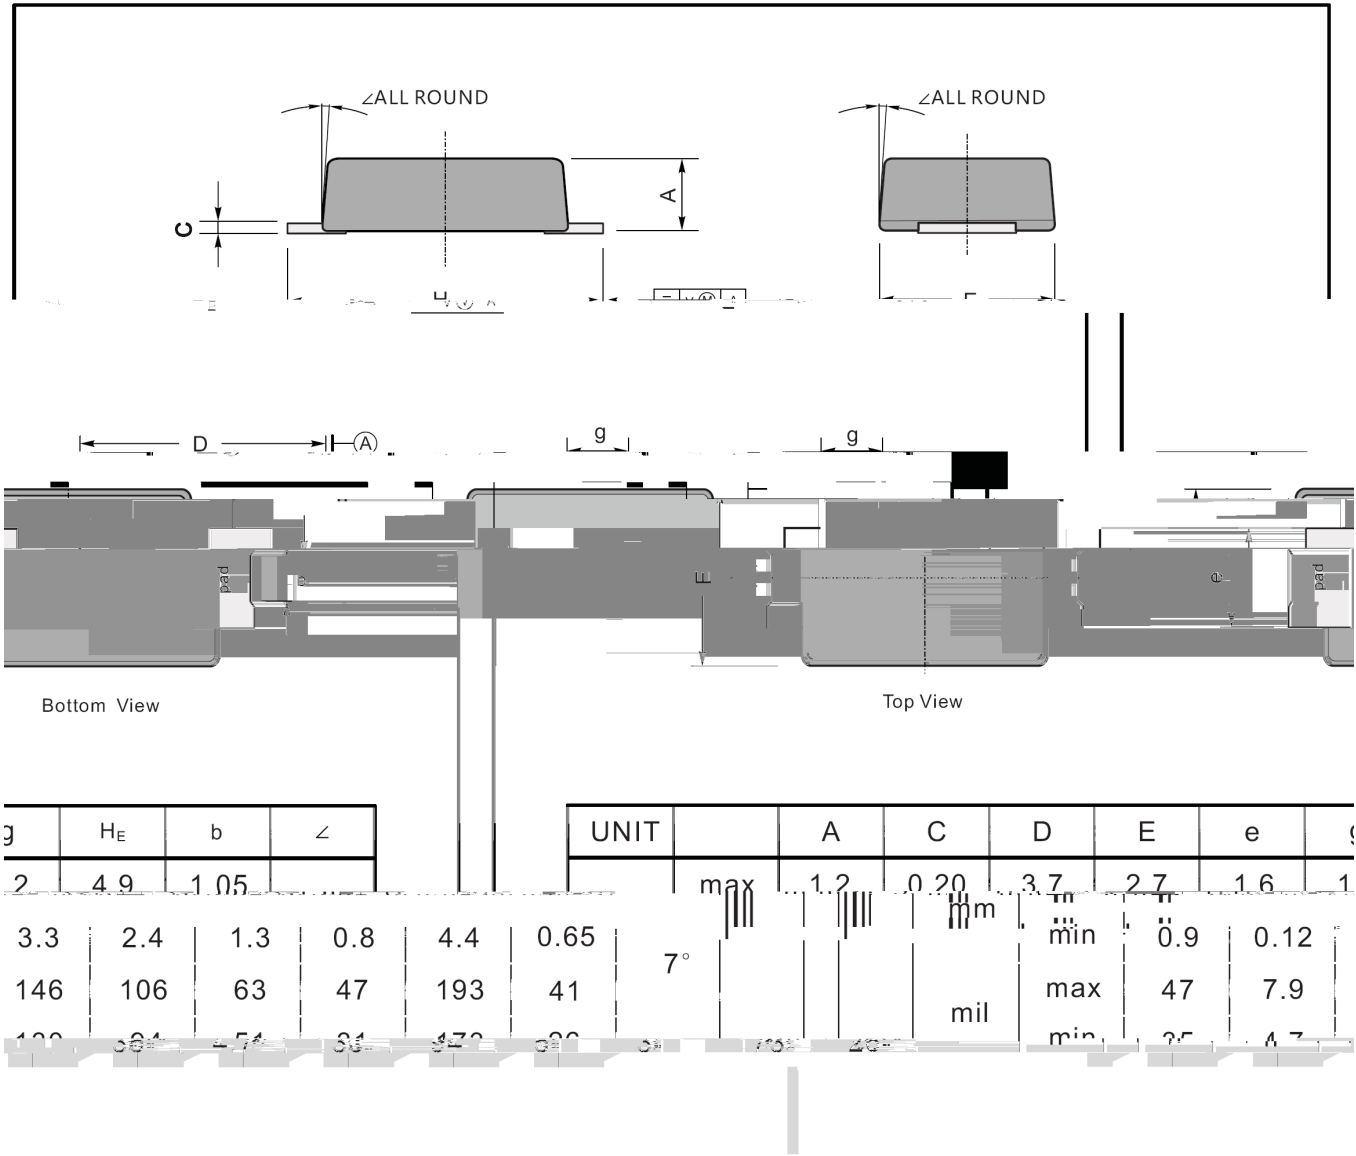

Marking

Type number	Marking code
US2AF	US2A
US2BF	US2B
US2DF	US2D
US2GF	US2G
US2JF	US2J
US2KF	US2K
US2MF	US2M


/ Marking Instructions

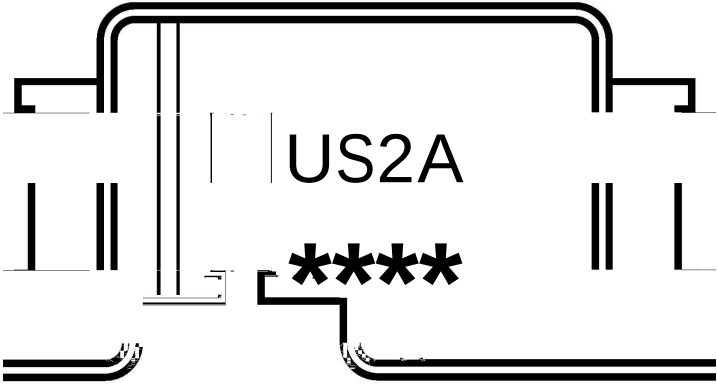

US2A		
****	1	3

US2A

() /

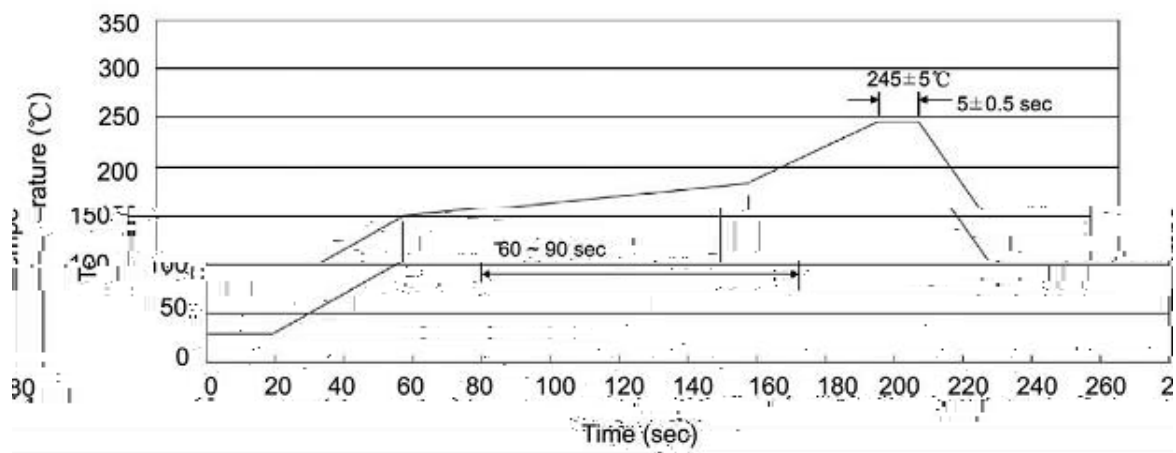

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± ± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱

/ Notices