


50V~1000V 2.0A SMA

RoHS 2011/65/EU

0




1



2

PIN	DESCRIPTION
1	Cathode
2	Anode

The recommended mounting pad size

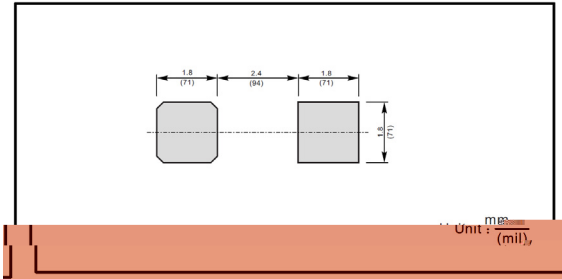



	θ								
	θ								



Fig.1 Forward Current Derating Curve




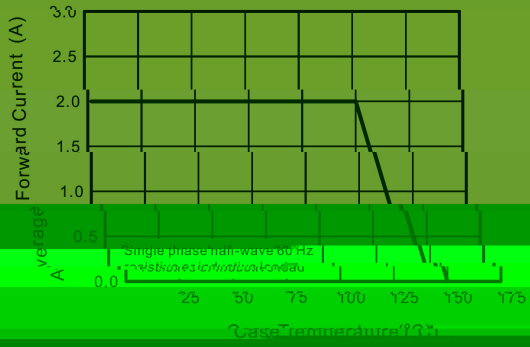


Fig.2 Typical Reverse Characteristics

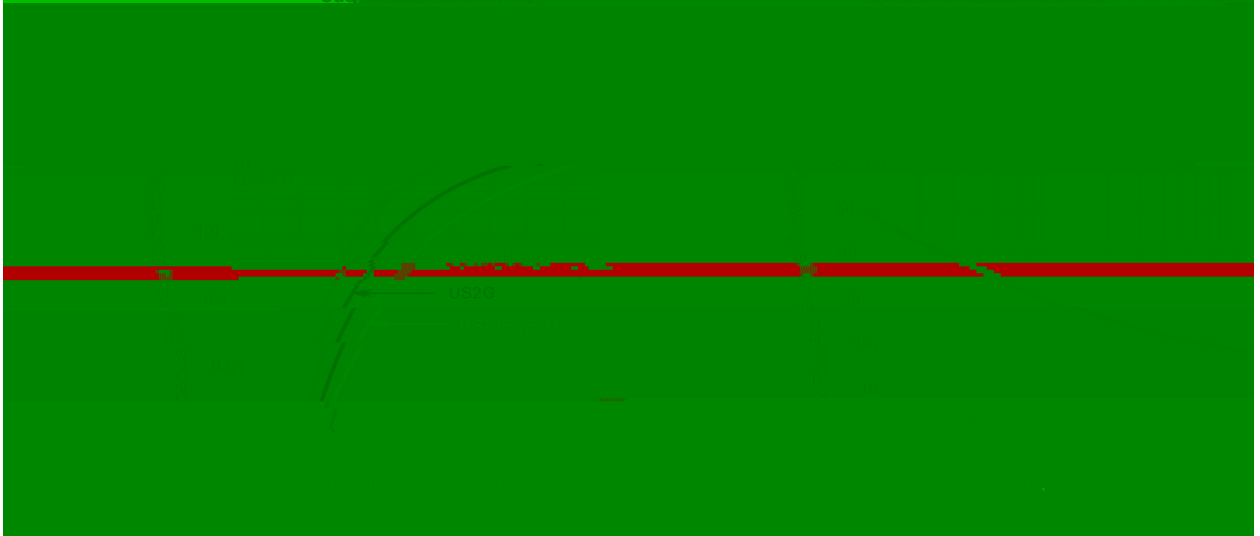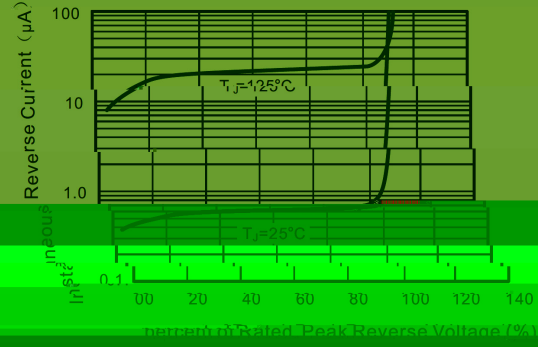

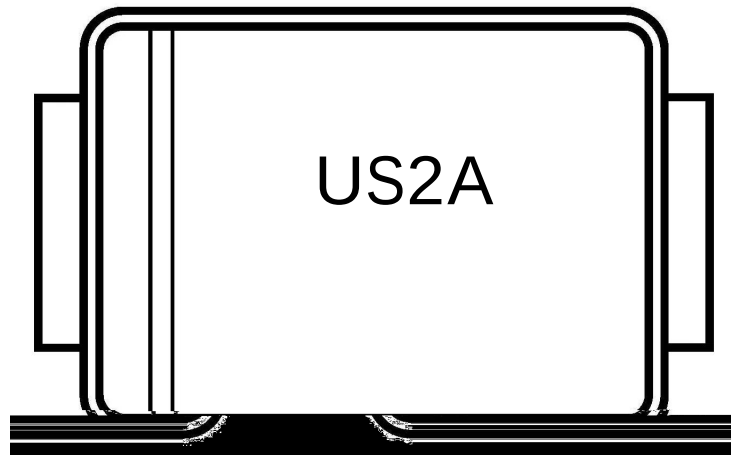

US2A

1 *


3 *

US2A

*

*

Temperature Profile for IR Reflow Soldering(Pb-Free)

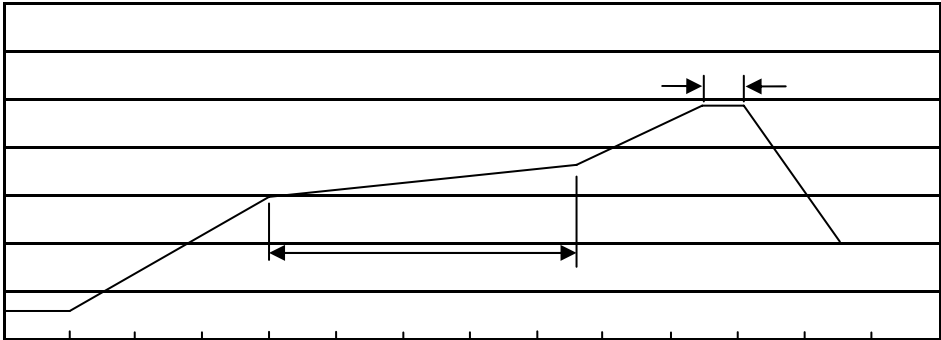

± ± ± ±

± ± ± ±

封装形式	包装数量					包装尺寸		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱